

Diagonal 6.43 mm (Type 1/2.8) CMOS Solid-state Image Sensor with Square Pixel for Color Cameras

## IMX515-AAQN-C

**STARVIS**

For the latest data sheet, please visit [www.sunnywale.com](http://www.sunnywale.com)

### Description

The IMX515-AAQN-C is a diagonal 6.4 mm (Type 1/2.8) CMOS active pixel type solid-state image sensor with a square pixel array and 8.46 M effective pixels. This chip operates with analog 2.9 V, digital 1.1 V, and interface 1.8 V triple power supply, and has low power consumption. High sensitivity, low dark current and no smear are achieved through the adoption of R, G and B primary color mosaic filters. This chip features an electronic shutter with variable charge-integration time.

(Applications: Surveillance cameras, FA cameras, Industrial cameras)

### Features

- ◆ CMOS active pixel type dots
- ◆ Built-in timing adjustment circuit, H/V driver and serial communication circuit
- ◆ Input frequency: 24 MHz / 27 MHz / 37.125 MHz / 72 MHz / 74.25 MHz
- ◆ Number of recommended recording pixels: 3840 (H) × 2160 (V) approx. 8.29M pixel
- ◆ Readout mode
  - All-pixel scan mode
  - Horizontal / Vertical 2/2-line binning mode
  - Window cropping mode
  - Horizontal / Vertical direction - Normal / Inverted readout mode
- ◆ Readout rate
  - Maximum frame rate in
  - All-pixel scan mode: 12 bit: 52.2 frame/s, 10 bit: 61.6 frame/s
- ◆ High dynamic range (HDR) function
  - Multiple exposure HDR
  - Digital overlap HDR
- ◆ Synchronizing sensors function
- ◆ Variable-speed shutter function (resolution 1H units)
- ◆ CDS / PGA function
  - 0 dB to 30 dB : Analog Gain 30 dB (step pitch 0.3 dB)
  - 30.3 dB to 72 dB : Analog Gain 30 dB + Digital Gain 0.3 dB to 42 dB (step pitch 0.3 dB)
- ◆ Supports I/O
  - CSI-2 serial data output ( 2 Lane / 4 Lane ), RAW10 / RAW12 output

Sony Semiconductor Solutions Corporation reserves the right to change products and specifications without prior notice.

This information does not convey any license by any implication or otherwise under any patents or other right.

Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony Semiconductor Solutions Corporation cannot assume responsibility for any problems arising out of the use of these circuits.

---

## Device Structure

- ◆ CMOS image sensor
- ◆ Image size  
Diagonal 6.4 mm (Type 1/2.8)    approx. 8.40 M pixels, All pixels
- ◆ Total number of pixels  
3864 (H) × 2228 (V)    approx. 8.60 M pixels
- ◆ Number of effective pixels  
3864 (H) × 2192 (V)    approx. 8.46 M pixels
- ◆ Number of active pixels  
3864 (H) × 2176 (V)    approx. 8.40 M pixels
- ◆ Number of recommended recording pixels  
3840 (H) × 2160 (V)    approx. 8.29 M pixels
- ◆ Unit cell size  
1.45 μm (H) × 1.45 μm (V)
- ◆ Optical black  
Horizontal (H) direction: Front 0 pixels, rear 0 pixels  
Vertical (V) direction: Front 36 pixels, rear 0 pixels
- ◆ Dummy  
Horizontal (H) direction: Front 0 pixels, rear 0 pixels  
Vertical (V) direction: Front 1 pixels, rear 1 pixels
- ◆ Substrate material  
Silicon

### Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit	Remarks
Supply voltage (analog: 2.9 V)	AV <sub>DD</sub>	-0.3	3.3	V	
Supply voltage (interface: 1.8 V)	OV <sub>DD</sub>	-0.3	3.3	V	
Supply voltage (digital: 1.1 V)	DV <sub>DD</sub>	-0.3	2.0	V	
Input voltage	VI	-0.3	OV <sub>DD</sub> + 0.3	V	Not exceed 3.3 V
Output voltage	VO	-0.3	OV <sub>DD</sub> + 0.3	V	Not exceed 3.3 V
Operating temperature	Topr	-30	85	°C	
Storage temperature	Tstg	-40	85	°C	

### Application Conditions

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage (analog: 2.9 V)	AV <sub>DD</sub>	2.80	2.90	3.00	V
Supply voltage (interface: 1.8 V)	OV <sub>DD</sub>	1.70	1.80	1.90	V
Supply voltage (digital: 1.1 V)	DV <sub>DD</sub>	1.00	1.10	1.20	V
Performance guarantee temperature	Tspec	-10	—	60	°C

---

## USE RESTRICTION NOTICE

This USE RESTRICTION NOTICE ("Notice") is for customers who are considering or currently using the image sensor products ("Products") set forth in this specifications book. Sony Semiconductor Solutions Corporation ("SSS") may, at any time, modify this Notice which will be available to you in the latest specifications book for the Products. You should abide by the latest version of this Notice. If a SSS subsidiary or distributor has its own use restriction notice on the Products, such a use restriction notice will additionally apply between you and the subsidiary or distributor. You should consult a sales representative of the subsidiary or distributor of SSS on such a use restriction notice when you consider using the Products.

### Use Restrictions

- The Products are intended for incorporation into such general electronic equipment as office products, communication products, measurement products, and home electronics products in accordance with the terms and conditions set forth in this specifications book and otherwise notified by SSS from time to time.
- You should not use the Products for critical applications which may pose a life- or injury-threatening risk or are highly likely to cause significant property damage in the event of failure of the Products. You should consult your sales representative beforehand when you consider using the Products for such critical applications. In addition, you should not use the Products in weapon or military equipment.
- SSS disclaims and does not assume any liability and damages arising out of misuse, improper use, modification, use of the Products for the above-mentioned critical applications, weapon and military equipment, or any deviation from the requirements set forth in this specifications book.

### Design for Safety

- SSS is making continuous efforts to further improve the quality and reliability of the Products; however, failure of a certain percentage of the Products is inevitable. Therefore, you should take sufficient care to ensure the safe design of your products such as component redundancy, anti-conflagration features, and features to prevent mis-operation in order to avoid accidents resulting in injury or death, fire or other social damage as a result of such failure.

### Export Control

- If the Products are controlled items under the export control laws or regulations of various countries, approval may be required for the export of the Products under the said laws or regulations. You should be responsible for compliance with the said laws or regulations.

### No License Implied

- The technical information shown in this specifications book is for your reference purposes only. The availability of this specifications book shall not be construed as giving any indication that SSS and its licensors will license any intellectual property rights in such information by any implication or otherwise. SSS will not assume responsibility for any problems in connection with your use of such information or for any infringement of third-party rights due to the same. It is therefore your sole legal and financial responsibility to resolve any such problems and infringement.

### Governing Law

- This Notice shall be governed by and construed in accordance with the laws of Japan, without reference to principles of conflict of laws or choice of laws. All controversies and disputes arising out of or relating to this Notice shall be submitted to the exclusive jurisdiction of the Tokyo District Court in Japan as the court of first instance.

### Other Applicable Terms and Conditions

- The terms and conditions in the SSS additional specifications, which will be made available to you when you order the Products, shall also be applicable to your use of the Products as well as to this specifications book. You should review those terms and conditions when you consider purchasing and/or using the Products.

General-0.0.9


## Contents

Description .....	1
Features .....	1
Device Structure .....	2
Absolute Maximum Ratings .....	3
Application Conditions .....	3
USE RESTRICTION NOTICE .....	4
Optical Center .....	7
Pixel Arrangement .....	8
Block Diagram and Pin Configuration .....	9
Pin Description .....	11
Electrical Characteristics .....	13
DC Characteristics .....	13
Current Consumption .....	14
AC Characteristics .....	15
Master Clock Waveform (INCK) .....	15
System Clear (XCLR) .....	16
XVS / XHS Input Characteristics in Slave Mode (Register XMASTER = 1) .....	17
XVS / XHS Input Characteristics in Master Mode (Register XMASTER = 0) .....	17
Serial Communication .....	18
I/O Equivalent Circuit Diagram .....	20
Spectral Sensitivity Characteristics .....	21
Image Sensor Characteristics .....	22
Image Sensor Characteristics Measurement Method .....	23
Measurement Conditions .....	23
Color Coding of Physical Pixel Array .....	23
Definition of standard imaging conditions .....	23
Measurement Method .....	24
Setting Registers Using Serial Communication .....	25
Description of Setting Registers (I <sup>2</sup> C) .....	25
Register Communication Timing (I <sup>2</sup> C) .....	26
Communication Protocol .....	27
Register Write and Read (I <sup>2</sup> C) .....	28
Single Read from Random Location .....	28
Single Read from Current Location .....	28
Sequential Read Starting from Random Location .....	29
Sequential Read Starting from Current Location .....	29
Single Write to Random Location .....	30
Sequential Write Starting from Random Location .....	30
Register Map .....	31
Readout Drive mode .....	47
Operating mode .....	47
Image Data Output Format (CSI-2 output) .....	48
Frame Format .....	48
Frame Structure .....	48
Embedded Data Line .....	49
Image Data Output Format .....	51
All-pixel mode .....	52
Horizontal/Vertical 2/2-line binning mode .....	55
Window Cropping Mode .....	58
Description of Various Functions .....	60
Standby Mode .....	60
Slave Mode and Master Mode .....	61
Gain Adjustment Function .....	63
Black Level Adjustment Function .....	64
Normal Operation and Inverted Operation .....	65
Shutter and Integration Time Settings .....	66
Example of Integration Time Setting .....	66
Normal Exposure Operation (Controlling the Integration Time in 1H Units) .....	67

Long Exposure Operation (Controlled by Expanding the Number of Lines per Frame) .....	68
Example of Integration Time Settings .....	69
CSI-2 Output .....	70
MIPI Transmitter .....	72
Internal A/D Conversion Bit Width Setting .....	73
Output Signal Range .....	73
INCK Setting .....	74
Register Hold Setting .....	76
Mode Transitions .....	77
Other Functions .....	78
Power-on and Power-off Sequence .....	79
Power-on sequence .....	79
Slew Rate Limitation of Power-on Sequence .....	80
Power-off sequence .....	81
Sensor Setting Flow .....	82
Setting Flow in Sensor Slave Mode .....	82
Setting Flow in Sensor Master Mode .....	83
Peripheral Circuit .....	84
Spot Pixel Specifications .....	85
Zone Definition .....	85
Notice on White Pixels Specifications .....	86
Measurement Method for Spot Pixels .....	87
Spot Pixel Pattern Specifications .....	88
Marking .....	89
Notes On Handling .....	90
Package Outline .....	92
List of Trademark Logos and Definition Statements .....	93


Optical Center

Top View

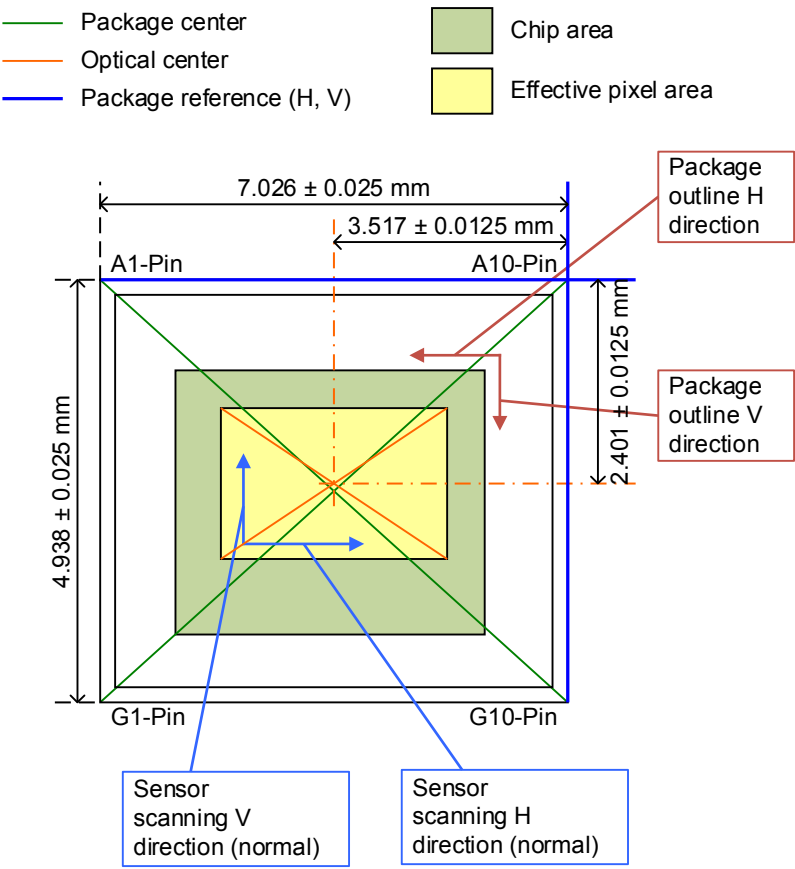

Optical Center

Pixel Arrangement

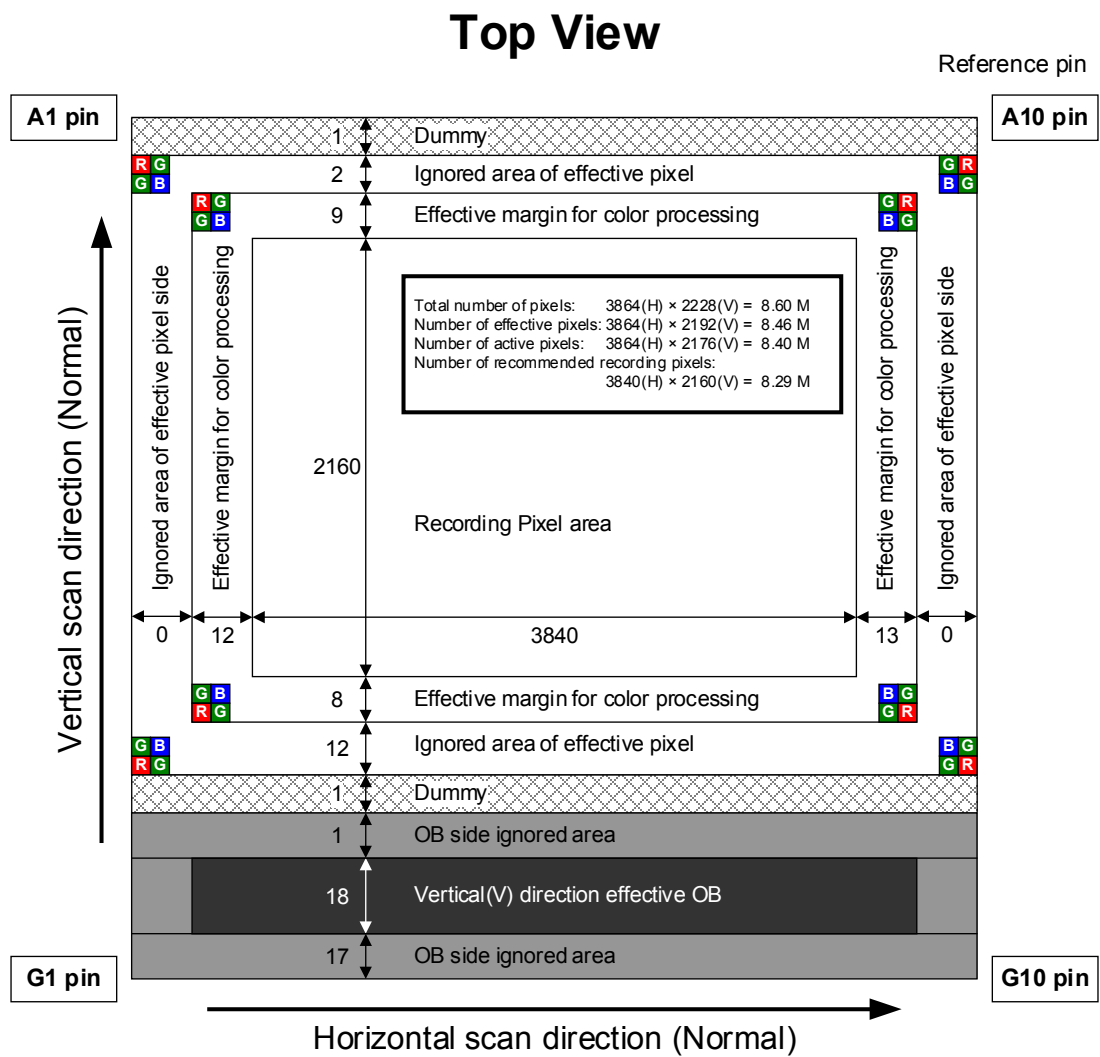


\* Reference pin number is consecutive numbering of package pin array.  
See the Pin Configuration for the number of each pin.  
Dummy is the effective pixels to ignore the data content.  
The last Effective line and column are not read-out.

Pixel Arrangement





Block Diagram and Pin Configuration

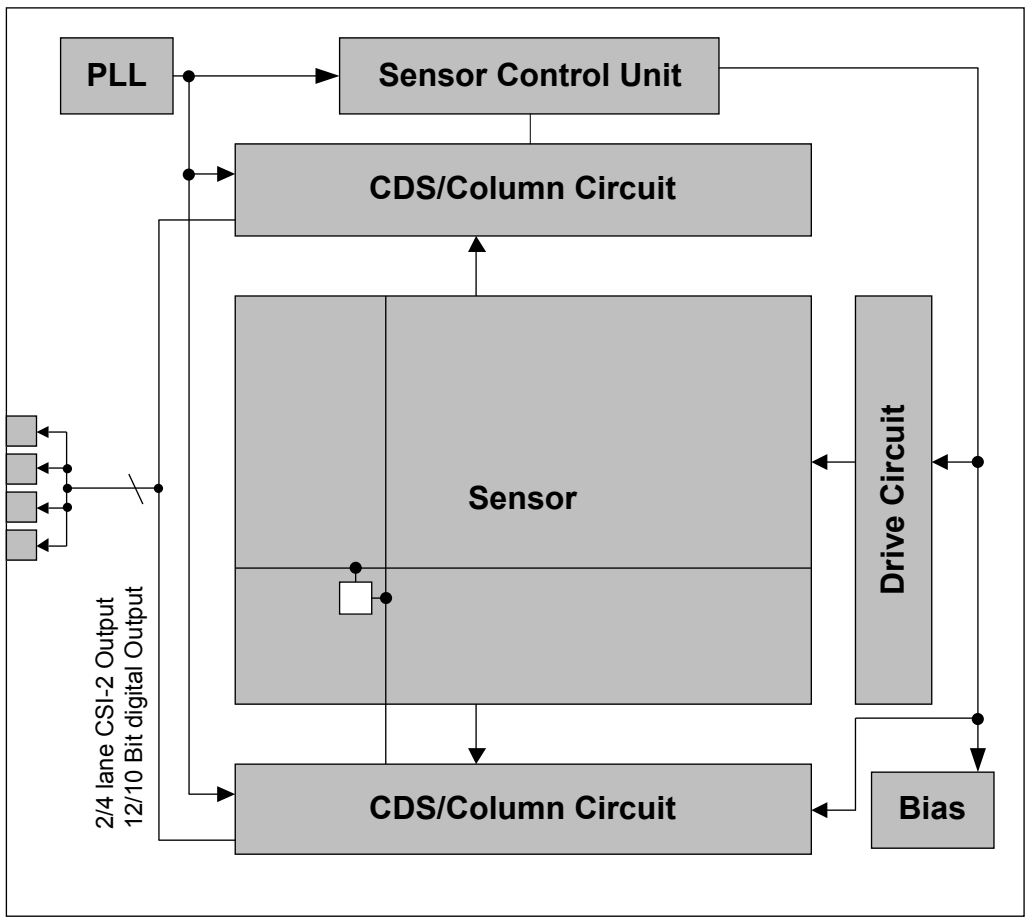

Block Diagram

Bottom View (Ball Up)

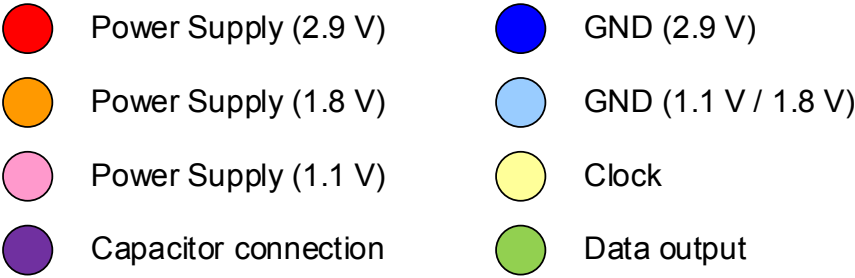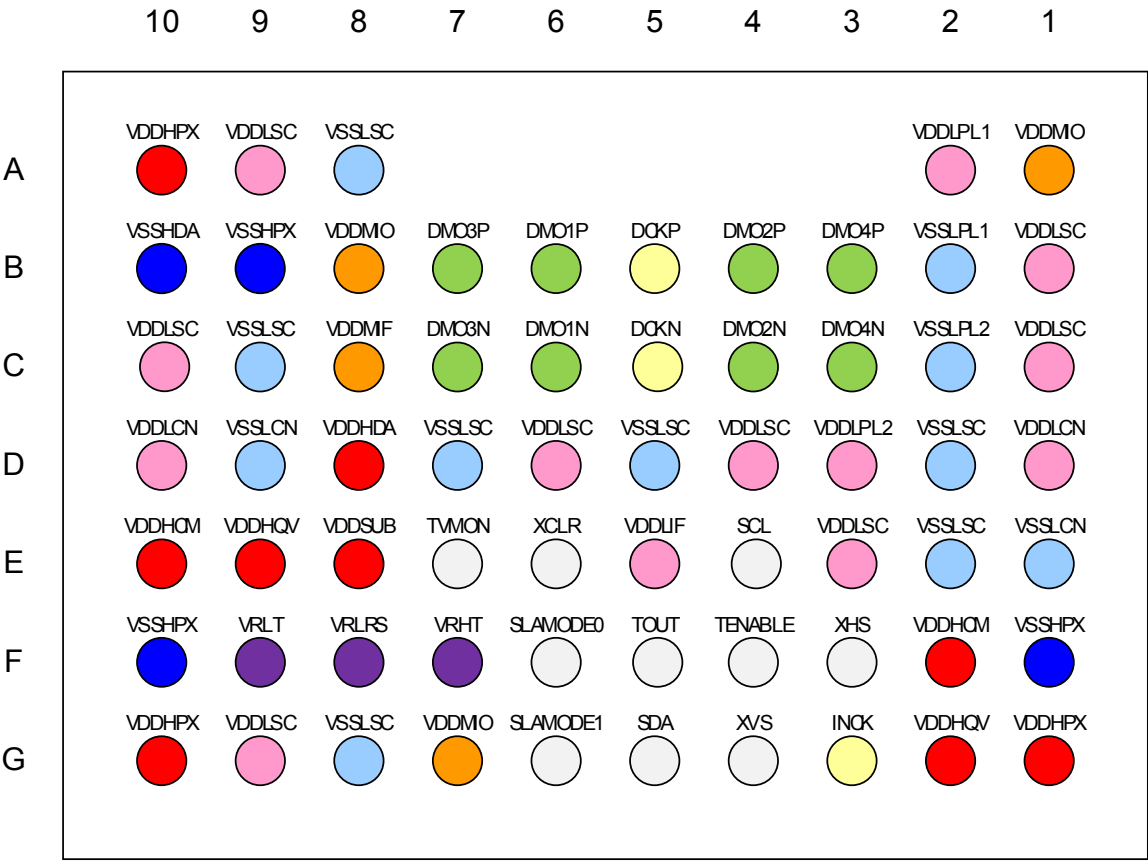

Pin Configuration

## Pin Description

No.	Pin No	I/O	Analog / Digital	Symbol	Description
1	A1	Power	D	VDDMIO	1.8 V power supply
2	A2	Power	D	VDDLPL1	1.1 V power supply
3	A8	GND	D	VSSLSC	1.1 V / 1.8 V GND
4	A9	Power	D	VDDLSC	1.1 V power supply
5	A10	Power	A	VDDHPX	2.9 V power supply
6	B1	Power	D	VDDLSC	1.1 V power supply
7	B2	GND	D	VSSLPL1	1.1 V / 1.8 V GND
8	B3	O	D	DMO4P	CSI-2 output (data)
9	B4	O	D	DMO2P	CSI-2 output (data)
10	B5	O	D	DCKP	CSI-2 output (clock)
11	B6	O	D	DMO1P	CSI-2 output (data)
12	B7	O	D	DMO3P	CSI-2 output (data)
13	B8	Power	D	VDDMIO	1.8 V power supply
14	B9	GND	A	VSSHFX	2.9 V GND
15	B10	GND	A	VSSHDA	2.9 V GND
16	C1	Power	D	VDDLSC	1.1 V power supply
17	C2	GND	D	VSSLPL2	1.1 V / 1.8 V GND
18	C3	O	D	DMO4N	CSI-2 output (data)
19	C4	O	D	DMO2N	CSI-2 output (data)
20	C5	O	D	DCKN	CSI-2 output (clock)
21	C6	O	D	DMO1N	CSI-2 output (data)
22	C7	O	D	DMO3N	CSI-2 output (data)
23	C8	Power	D	VDDMIF	1.8 V power supply
24	C9	GND	D	VSSLSC	1.1 V / 1.8 V GND
25	C10	Power	D	VDDLSC	1.1 V power supply
26	D1	Power	D	VDDLGN	1.1 V power supply
27	D2	GND	D	VSSLSC	1.1 V / 1.8 V GND
28	D3	Power	D	VDDLPL2	1.1 V power supply
29	D4	Power	D	VDDLSC	1.1 V power supply
30	D5	GND	D	VSSLSC	1.1 V / 1.8 V GND
31	D6	Power	D	VDDLSC	1.1 V power supply
32	D7	GND	D	VSSLSC	1.1 V / 1.8 V GND
33	D8	Power	A	VDDHDA	2.9 V power supply
34	D9	GND	D	VSSLCN	1.1 V / 1.8 V GND
35	D10	Power	D	VDDLGN	1.1 V power supply
36	E1	GND	D	VSSLCN	1.1 V / 1.8 V GND
37	E2	GND	D	VSSLSC	1.1 V / 1.8 V GND
38	E3	Power	D	VDDLSC	1.1 V power supply
39	E4	I/O	D	SCL	Serial clock input
40	E5	Power	D	VDDLIF	1.1 V power supply
41	E6	I	D	XCLR	System clear
42	E7	O	A	TVMON	TEST output pin, OPEN
43	E8	Power	A	VDDSUB	2.9 V power supply
44	E9	Power	A	VDDHQV	2.9 V power supply
45	E10	Power	A	VDDHCM	2.9 V power supply
46	F1	GND	A	VSSHFX	2.9 V GND

No.	Pin No	I/O	Analog / Digital	Symbol	Description
47	F2	Power	A	VDDHCM	2.9 V power supply
48	F3	I/O	D	XHS	Horizontal sync signal
49	F4	I	D	TENABLE	Test enable, OPEN
50	F5	I/O	D	TOUT	Digital TEST output pin, OPEN
51	F6	I	D	SLAMODE0	Select slave address
52	F7	O	A	VRHT	Capacitor connection
53	F8	O	A	VRLRS	Capacitor connection
54	F9	O	A	VRLT	Capacitor connection
55	F10	GND	A	VSSHXP	2.9 V GND
56	G1	Power	A	VDDHPX	2.9 V power supply
57	G2	Power	A	VDDHQV	2.9 V power supply
58	G3	I	D	INCK	Master clock input
59	G4	I/O	D	XVS	Vertical sync signal
60	G5	I/O	D	SDA	Serial data communication
61	G6	I	D	SLAMODE1	Select slave address
62	G7	Power	D	VDDMIO	1.8 V power supply
63	G8	GND	D	VSSLSC	1.1 V / 1.8 V GND
64	G9	Power	D	VDDLSC	1.1 V power supply
65	G10	Power	A	VDDHPX	2.9 V power supply

## Electrical Characteristics

### DC Characteristics

Item		Pins	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	Analog	VDDHx	AV <sub>DD</sub>		2.80	2.90	3.00	V
	Interface	VDDMx	OV <sub>DD</sub>		1.70	1.80	1.90	V
	Digital	VDDLx	DV <sub>DD</sub>		1.00	1.10	1.20	V
Digital input voltage		XHS XVS XCLR INCK SLAMODE0 SLAMODE1	VIH	XVS / XHS Slave Mode	$0.8 \times OV_{DD}$	—	—	V
			VIL		—	—	$0.2 \times OV_{DD}$	V
Digital output voltage		XHS XVS TOUT	VOH	XVS / XHS Master Mode	$OV_{DD} - 0.2$	—	—	V
			VOL		—	—	0.2	V

**Current Consumption**


Item	Symbol	Typ.	Max.	Unit
Operating current MIPI CSI-2 / 4 Lane, 1485 Mbps 10 bit, 60 frame/s All-pixel mode	I <sub>AVDD</sub>	128	156	mA
	I <sub>OVDD</sub>	3	3	mA
	I <sub>DVDD</sub>	187	250	mA
Standby current	I <sub>AVDD_STB</sub>	—	0.2	mA
	I <sub>OVDD_STB</sub>	—	0.2	mA
	I <sub>DVDD_STB</sub>	—	15.1	mA

Operating current: (Typ.) Supply voltage 2.9 V / 1.8 V / 1.1 V, T<sub>j</sub> = 25 °C, standard luminous intensity.  
(Max.) Supply voltage 3.0 V / 1.9 V / 1.2 V, T<sub>j</sub> = 60 °C, worst state of internal circuit  
operating current consumption.

Standby: (Max.) Supply voltage 3.0 V / 1.9 V / 1.2 V, T<sub>j</sub> = 60 °C, INCK: 0 V, light-obstructed state.

## AC Characteristics

## Master Clock Waveform (INCK)

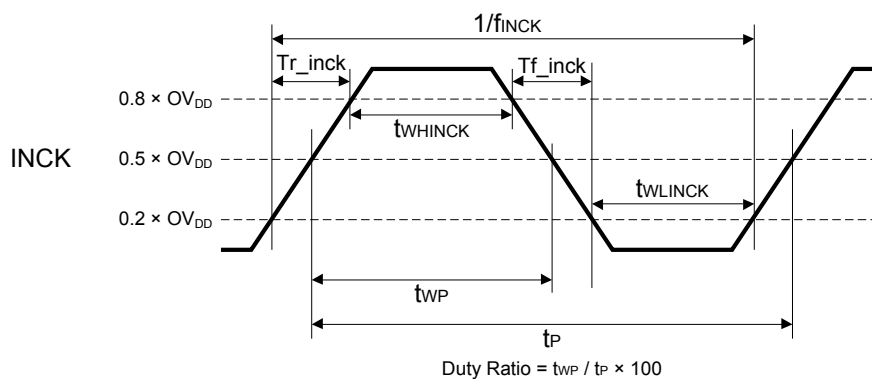


INCK 24 MHz, 27 MHz, 37.125 MHz, 72 MHz, 74.25 MHz

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
INCK clock frequency	$f_{INCK}$	$f_{INCK} \times 0.96$	$f_{INCK}$	$f_{INCK} \times 1.02$	MHz	$f_{INCK} = 24 \text{ MHz}, 27 \text{ MHz}, 37.125 \text{ MHz}, 72 \text{ MHz}, 74.25 \text{ MHz}$
INCK Low level pulse width	$t_{WLINCK}$	4	—	—	ns	
INCK High level pulse width	$t_{WHINCK}$	4	—	—	ns	
INCK clock duty	—	45	50	55	%	Define with $0.5 \times OV_{DD}$
INCK Rise time	$Tr\_inck$	—	—	5	ns	20 % to 80 %
INCK Fall time	$Tf\_inck$	—	—	5	ns	80 % to 20 %


\* The INCK fluctuation affects the frame rate.

System Clear (XCLR)

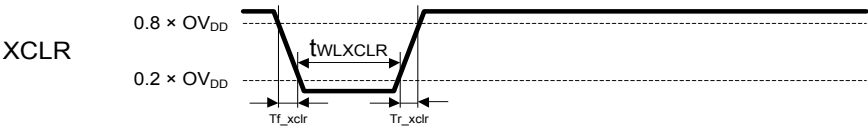

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
XCLR Low level pulse width	$t_{WLXCLR}$	$4 / f_{INCK}$	—	—	ns	
XCLR Rise time	$Tr\_xclr$	—	—	5	ns	20 % to 80 %
XCLR Fall time	$Tf\_xclr$	—	—	5	ns	80 % to 20 %

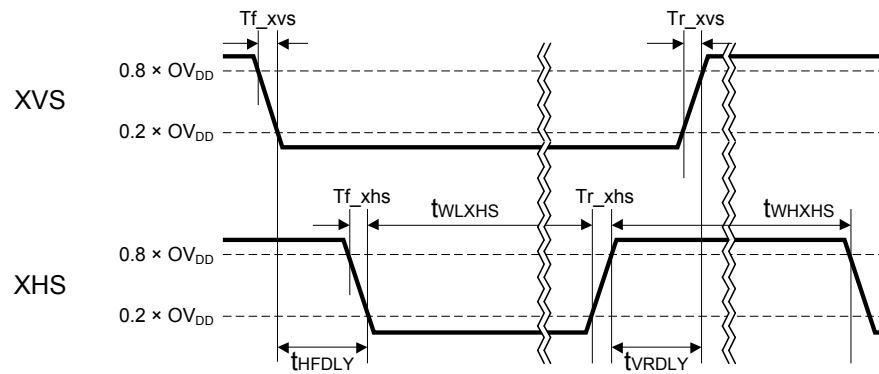

**XVS / XHS Input Characteristics in Slave Mode (Register XMASTER = 1)**

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
XHS Low level pulse width	$t_{WLXHS}$	$4 / f_{INCK}$	—	—	ns	
XHS High level pulse width	$t_{WHXHS}$	$4 / f_{INCK}$	—	—	ns	
XVS - XHS fall width	$t_{HFDLY}$	$1 / f_{INCK}$	—	—	ns	
XHS - XVS rise width	$t_{VRDLY}$	$1 / f_{INCK}$	—	—	ns	
XVS Rise time	$Tr\_xvs$	—	—	5	ns	20 % to 80 %
XVS Fall time	$Tf\_xvs$	—	—	5	ns	80 % to 20 %
XHS Rise time	$Tr\_xhs$	—	—	5	ns	20 % to 80 %
XHS Fall time	$Tf\_xhs$	—	—	5	ns	80 % to 20 %


**XVS / XHS Input Characteristics in Master Mode (Register XMASTER = 0)**

\* XVS and XHS cannot be used for the sync signal to pixels.

Be sure to detect sync code to detect the start of effective pixels in 1 line.

For the output waveforms in master mode, see the item of “Slave Mode and Master Mode”

## Serial Communication

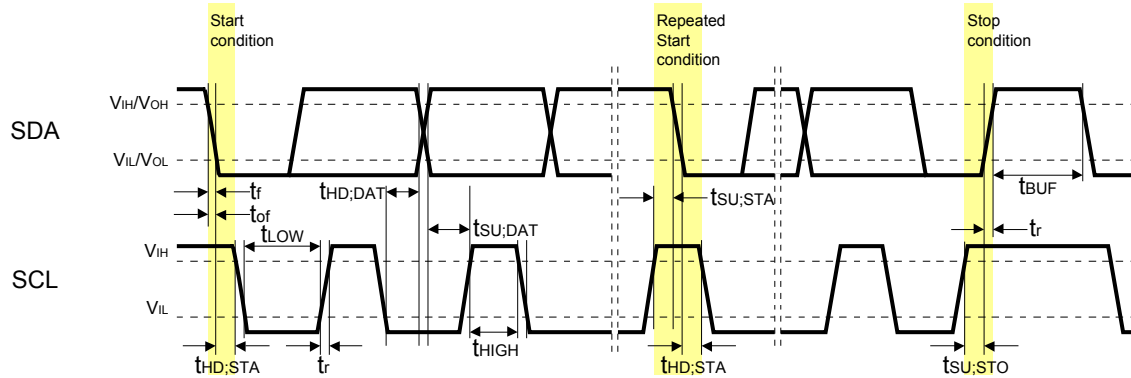I<sup>2</sup>CI<sup>2</sup>C Specification

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Low level input voltage	V <sub>IL</sub>	-0.3	—	0.3 × OV <sub>DD</sub>	V	
High level input voltage	V <sub>IH</sub>	0.7 × OV <sub>DD</sub>	—	1.9	V	
Low level output voltage	V <sub>OL</sub>	0	—	0.2 × OV <sub>DD</sub>	V	OV <sub>DD</sub> < 2 V, Sink 3 mA
High level output voltage	V <sub>OH</sub>	0.8 × OV <sub>DD</sub>	—	—	V	
Input current	I <sub>i</sub>	-10	—	10	μA	0.1 × OV <sub>DD</sub> to 0.9 × OV <sub>DD</sub>
Input Capacitance for SCL / SDA	C <sub>i</sub>	—	—	10	pF	

I<sup>2</sup>C AC Characteristics (Standard-mode, Fast-mode)

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
SCL clock frequency	f <sub>SCL</sub>	0	—	400	kHz	
Hold time (Start Condition)	t <sub>HD;STA</sub>	0.6	—	—	μs	
Low period of the SCL clock	t <sub>LOW</sub>	1.3	—	—	μs	
High period of the SCL clock	t <sub>HIGH</sub>	0.6	—	—	μs	
Set-up time (Repeated Start Condition)	t <sub>SU;STA</sub>	0.6	—	—	μs	
Data hold time	t <sub>HD;DAT</sub>	0	—	0.9	μs	
Data set-up time	t <sub>SU;DAT</sub>	100	—	—	ns	
Rise time of both SDA and SCL signals	t <sub>r</sub>	—	—	300	ns	
Fall time of both SDA and SCL signals	t <sub>f</sub>	—	—	300	ns	
Set-up time (Stop Condition)	t <sub>SU;STO</sub>	0.6	—	—	μs	
Bus free time between a STOP and START Condition	t <sub>BUF</sub>	1.3	—	—	μs	
Output fall time	t <sub>of</sub>	—	—	250	ns	Load 10 pF to 400 pF, 0.7 × OV <sub>DD</sub> to 0.3 × OV <sub>DD</sub>

I<sup>2</sup>C AC Characteristics (Fast-mode Plus)

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
SCL clock frequency	f <sub>SCL</sub>	0	—	1000	kHz	INCK ≥ 16 MHz
Hold time (Start Condition)	t <sub>HD;STA</sub>	0.26	—	—	μs	
Low period of the SCL clock	t <sub>LOW</sub>	0.5	—	—	μs	
High period of the SCL clock	t <sub>HIGH</sub>	0.26	—	—	μs	
Set-up time (Repeated Start Condition)	t <sub>SU;STA</sub>	0.26	—	—	μs	
Data hold time	t <sub>HD;DAT</sub>	0	—	0.9	μs	
Data set-up time	t <sub>SU;DAT</sub>	50	—	—	ns	
Rise time of both SDA and SCL signals	t <sub>r</sub>	—	—	120	ns	
Fall time of both SDA and SCL signals	t <sub>f</sub>	—	—	120	ns	
Set-up time (Stop Condition)	t <sub>SU;STO</sub>	0.26	—	—	μs	
Bus free time between a STOP and START Condition	t <sub>BUF</sub>	0.5	—	—	μs	
Output fall time	t <sub>of</sub>	—	—	120	ns	Load 10 pF to 400 pF, 0.7 × OV <sub>DD</sub> to 0.3 × OV <sub>DD</sub>


## I/O Equivalent Circuit Diagram

☒: External pin

Symbol	Equivalent circuit	Symbol	Equivalent circuit
TENABLE		XVS XHS TOUT	
INCK		XCLR SLAMODE0 SLAMODE1	
SDA SCL		VRLRS VRLT	
TVMON		DMOxP DMOxN DCKP DCKN	
VRHT			

Spectral Sensitivity Characteristics

(Characteristics in the wafer status)

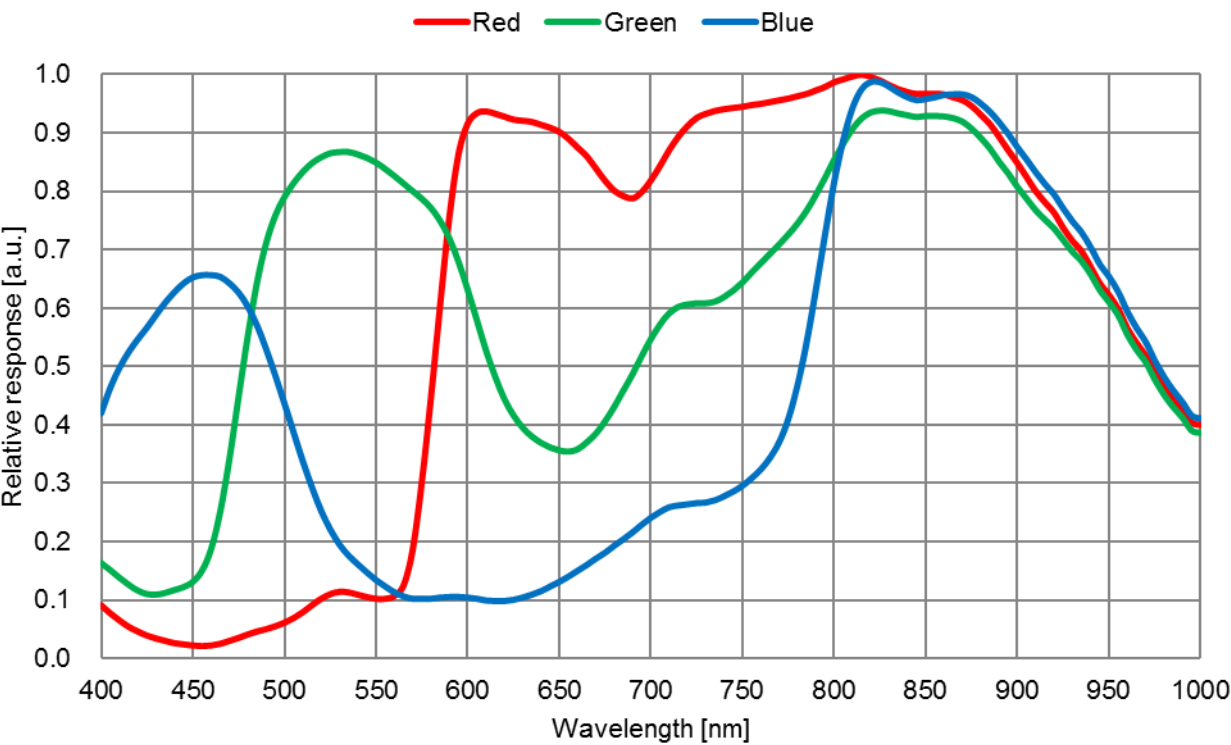

## Image Sensor Characteristics

( $AV_{DD} = 2.9\text{ V}$ ,  $OV_{DD} = 1.8\text{ V}$ ,  $DV_{DD} = 1.1\text{ V}$ ,  $T_j = 60\text{ }^{\circ}\text{C}$ , All-pixel mode, 12 bit 30 frame/s, Gain: 0 dB)

Item	Symbol	Min.	Typ.	Max.	Unit	Measurement method	Remarks
G sensitivity (New measurement conditions)	S	4794 (702)	5640 (826)	—	Digit/lx/s (mV/lx/s)	1	F5.6 12 bit converted value
G sensitivity (Old measurement conditions)	S	1926 (282)	2266 (332)	—	Digit (mV)	1	1/30 s storage 12 bit converted value
Sensitivity ratio	R / G	RG	0.47	—	0.63	—	—
	B / G	BG	0.31	—	0.49	—	
Saturation signal	Vsat	3895 (570)	—	—	Digit (mV)	3	12 bit converted value
Video signal shading	SH	—	—	25	%	4	—
Vertical line	VL	—	—	90	$\mu\text{V}$	5	12 bit converted value
Dark signal	Vdt	—	—	0.89 (0.13)	Digit (mV)	6	1/30 s storage 12 bit converted value
Dark signal shading	$\Delta\text{Vdt}$	—	—	0.89 (0.13)	Digit (mV)	7	1/30 s storage 12 bit converted value

- Note)
1. Converted value into mV using 1Digit = 0.1465 mV for 12-bit output and 1Digit = 0.5865 mV for 10-bit output.
  2. The video signal shading is the measured value in the wafer status (including color filter) and does not include characteristics of the seal glass.
  3. The characteristics above apply to effective pixel area.
  4. Since the measurement conditions are in transition, the old conditions are also described.


## Image Sensor Characteristics Measurement Method

### Measurement Conditions

1. In the following measurements, the device drive conditions are at the typical values of the bias conditions and clock voltage conditions.
2. In the following measurements, spot pixels are excluded and, unless otherwise specified, the optical black (OB) level is used as the reference for the signal output.

### Color Coding of Physical Pixel Array

The primary color filters of this image sensor are arranged in the layout shown in the figure below. Gr and Gb represent the G signal on the same line as the R and B signals, respectively. The R signal and Gr signal lines and the Gb signal and B signal lines are output successively.

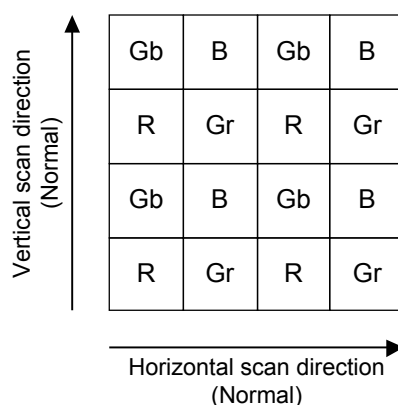

Color Coding Diagram

### Definition of standard imaging conditions

- ◆ Standard imaging condition I:  
Using a purple excitation LED light source with a color temperature of 2850 K, an IR cut filter CM700 ( $t = 1.0$  mm) is placed between the LED light source and the sensor receiving surface to irradiate substantially parallel light.
- ◆ Standard imaging condition II:  
Image a light source (color temperature of 3200 K) with a uniformity of brightness within 2 % at all angles. Use a testing standard lens with CM700 ( $t = 1.0$  mm) as an IR cut filter. The luminous intensity is adjusted to the value indicated in each testing item by the lens diaphragm.
- ◆ Standard imaging condition III:  
Image a light source (color temperature of 3200 K) with a uniformity of brightness within 2 % at all angles. Use a testing standard lens with CM700 ( $t = 1.0$  mm) as an IR cut filter. The luminous intensity is adjusted to the value indicated in each testing item by the lens diaphragm.

## Measurement Method

### 1. Sensitivity

[New measurement conditions]

Set the measurement condition to the standard imaging condition I, and calculate using the illuminance (Ev) of the sensor receiving surface, the signal values (VGr, VGb, VR, VB) at the center of the screen, and the integration time (T).

$$VG = (VGr + VGb) / 2$$

$$Sg = VG / (Ev \times T) \text{ [Digit / lx / s]}$$

[Old measurement conditions]

Set the measurement condition to the standard imaging condition I. After setting the electronic shutter mode with a shutter speed of 1/100 s, measure the Gr and Gb signal outputs (VGr, VGb) at the center of the screen, and substitute the values into the following formula.

$$S = (VGr + VGb) / 2 \times 100 / 30 \text{ [mV]}$$

### 2. Sensitivity ratio

By using the R and B signal outputs (VR, VB) obtained from the sensitivity measurement, substitute the values into the following formulas.

$$RG = VR / VG$$

$$BG = VB / VG$$

### 3. Saturation signal

Set the measurement condition to the standard imaging condition II. After adjusting the luminous intensity to 20 times the intensity with the average value of the Gr and Gb signal outputs, 300 mV, measure the minimum values of the Gr, Gb, R and B signal outputs.

### 4. Video signal shading

Set the measurement condition to the standard imaging condition III. With the lens diaphragm at F2.8, adjust the luminous intensity so that the average value of the Gr and Gb signal outputs is 300 mV. Then measure the maximum value (Gmax [mV]) and the minimum value (Gmin [mV]) of the Gr and Gb signal outputs, and substitute the values into the following formula.

$$SH = (Gmax - Gmin) / 300 \times 100 \text{ [%]}$$

### 5. Vertical Line

With the device junction temperature of 60 °C and the device in the light-obstructed state, calculates each average output of Gr, Gb, R and B on respective columns. Calculates maximum value of difference with adjacent column on the same color (VL [μV]).

### 6. Dark signal

With the device junction temperature of 60 °C and the device in the light-obstructed state, divide the output difference between 1/30 s integration and 1/300 s integration by 0.9, and calculate the signal output converted to 1/30 s integration. Measure the average value of this output (Vdt [mV]).

### 7. Dark signal shading

After the measurement item 6, measure the maximum value (Vdmax [mV]) and the minimum value (Vdmin [mV]) of the dark signal output, and substitute the values into the following formula.

$$\Delta Vdt = Vdmax - Vdmin \text{ [mV]}$$




## Setting Registers Using Serial Communication

This sensor can write and read the setting values of the various registers shown in the Register Map by I<sup>2</sup>C communication. See the Register Map for the addresses and setting values to be set.

### Description of Setting Registers (I<sup>2</sup>C)

The serial data input order is MSB-first transfer. The table below shows the various data types and descriptions. Using SLAMODE0 and SLAMODE1 pins, SLAVE address can be changed.

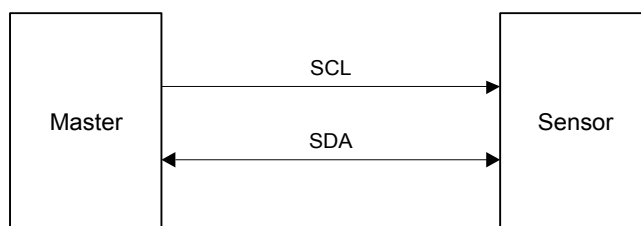

Pin connection of serial communication

#### SLAVE Address

SLAMODE1 pin	SLAMODE0 pin	MSB							LSB
Low	Low	0	0	1	1	0	1	0	R / W
Low	High	0	0	1	0	0	0	0	R / W
High	Low	0	1	1	0	1	1	0	R / W
High	High	0	1	1	0	1	1	1	R / W

\* R/W is data direction bit

#### R / W

R / W bit	Data direction
0	Write (Master to Sensor)
1	Read (Sensor to Master)

#### I<sup>2</sup>C pin description


Symbol	Pin No.	Remarks
SCL	E4	I <sup>2</sup> C serial clock input
SDA	G5	I <sup>2</sup> C serial data communication

## Register Communication Timing (I<sup>2</sup>C)

In I<sup>2</sup>C communication system, communication can be performed during the period excluding the communication prohibited period (1 XHS period) shown below.


The registers whose reflection timing is "V" in the register map are reflected by the "Frame reflection register reflection timing" when communication is performed during the communication period shown in the figure below. Registers whose reflection timing is "I" (Immediately) are reflected when the communication is performed.

Using REGHOLD function is recommended for register setting using I<sup>2</sup>C communication. For REGHOLD function, see item "Register Hold Setting" in section "Description of Various Functions".

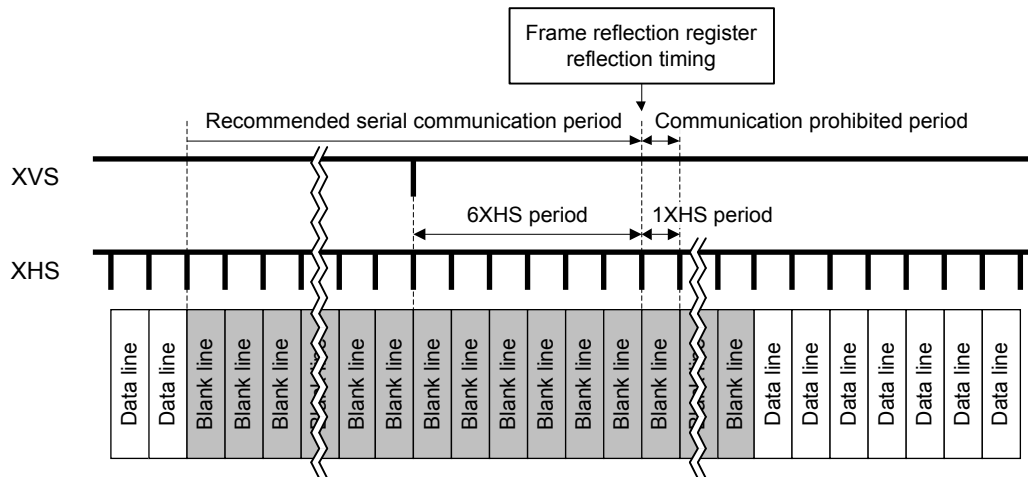


## Communication Protocol

I<sup>2</sup>C serial communication supports a 16-bit register address and 8-bit data message type.

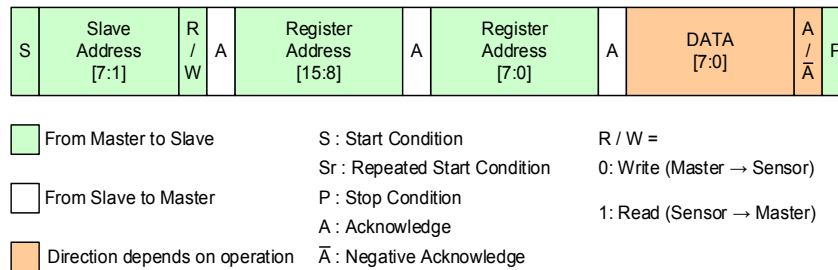


## Communication Protocol


Data is transferred serially, MSB first in 8-bit units. After each data byte is transferred, A (Acknowledge) /  $\bar{A}$  (Negative Acknowledge) is transferred. Data (SDA) is transferred at the clock (SCL) cycle. SDA can change only while SCL is Low, so the SDA value must be held while SCL is High. The Start condition is defined by SDA changing from High to Low while SCL is High. When the Stop condition is not generated in the previous communication phase and Start condition for the next communication is generated, that Start condition is recognized as a Repeated Start condition.

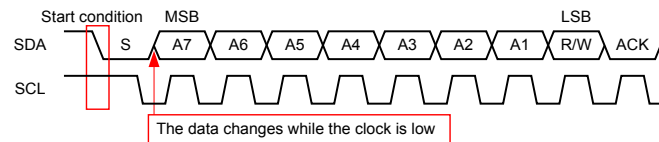

### Start Condition

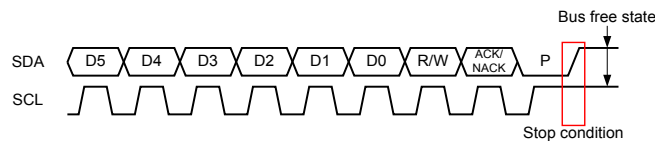


### Stop Condition

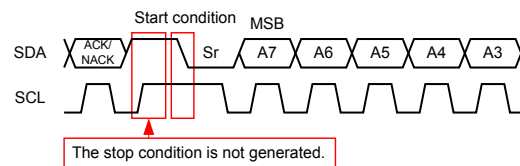

### Repeated Start Condition

After transfer of each data byte, the Master or the sensor transmits an Acknowledge / Negative Acknowledge and releases (does not drive) SDA. When Negative Acknowledge is generated, the Master must immediately generate the Stop Condition and end the communication.




## Acknowledge and Negative Acknowledge

## Register Write and Read (I<sup>2</sup>C)

This sensor supports the following four read operations and two write operations.

### Single Read from Random Location


The sensor has an index function that indicates which address it is focusing on. In reading the data at an optional single address, the Master must set the index value to the address to be read. For this purpose, it performs dummy write operation up to the register address. The upper level of the figure below shows the sensor internal index value, and the lower level of the figure shows the SDA I/O data flow. The Master sets the sensor index value to M by designating the sensor slave address with a write request, then designating the address (M). Then, the Master generates the start condition. The Start Condition is generated without generating the Stop Condition, so it becomes the Repeated Start Condition. Next, when the Master sends the slave address with a read request, the sensor outputs an Acknowledge immediately followed by the index address data on SDA. After the Master receives the data, it generates a Negative Acknowledge and the Stop Condition to end the communication.

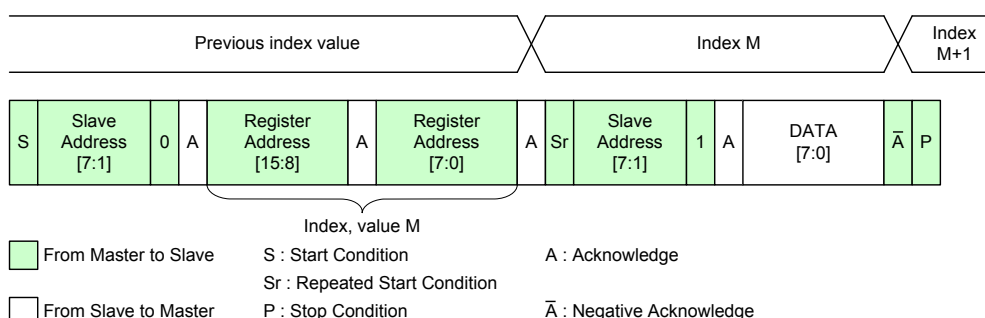

### Single Read from Random Location

### Single Read from Current Location


After the slave address is transmitted by a write request, that address is designated by the next communication and the index holds that value. In addition, when data read/write is performed, the index is incremented by the subsequent Acknowledge/Negative Acknowledge timing. When the index value is known to indicate the address to be read, sending the slave address with a read request allows the data to be read immediately after Acknowledge. After receiving the data, the Master generates a Negative Acknowledge and the Stop Condition to end the communication, but the index value is incremented, so the data at the next address can be read by sending the slave address with a read request.

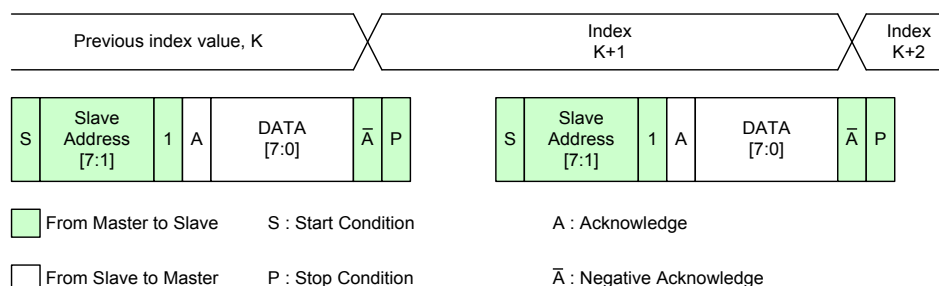

### Single Read from Current Location

### Sequential Read Starting from Random Location

In reading data sequentially, which is starting from an optional address, the Master must set the index value to the start of the addresses to be read. For this purpose, dummy write operation includes the register address setting. The Master sets the sensor index value to M by designating the sensor slave address with a read request, then designating the address (M). Then, the Master generates the Repeated Start Condition. Next, when the Master sends the slave address with a read request, the sensor outputs an Acknowledge followed immediately by the index address data on SDA. When the Master outputs an Acknowledge after it receives the data, the index value inside the sensor is incremented and the data at the next address is output on SDA. This allows the Master to read data sequentially. After reading the necessary data, the Master generates a Negative Acknowledge and the Stop Condition to end the communication.

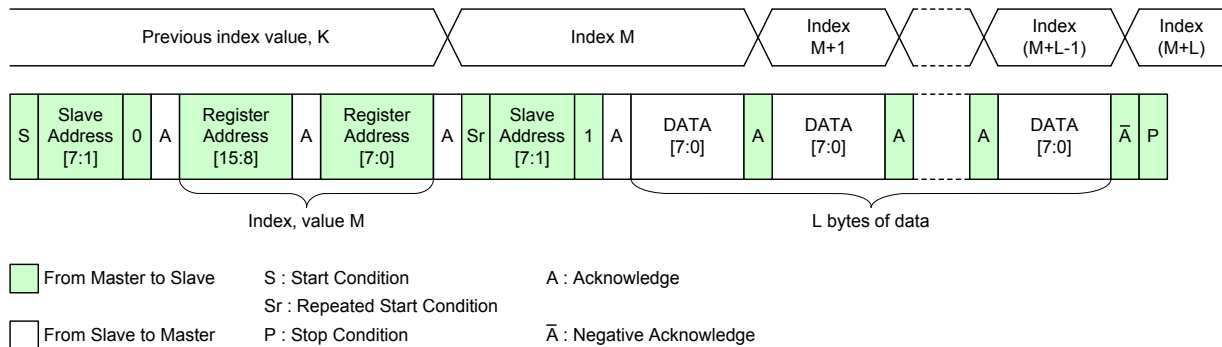


### Sequential Read Starting from Random Location

### Sequential Read Starting from Current Location

When the index value is known to indicate the address to be read, sending the slave address with a read request allows the data to be read immediately after the Acknowledge. When the Master outputs an Acknowledge after it receives the data, the index value inside the sensor is incremented and the data at the next address is output on SDA.


This allows the Master to read data sequentially. After reading the necessary data, the Master generates a Negative Acknowledge and the Stop Condition to end the communication.

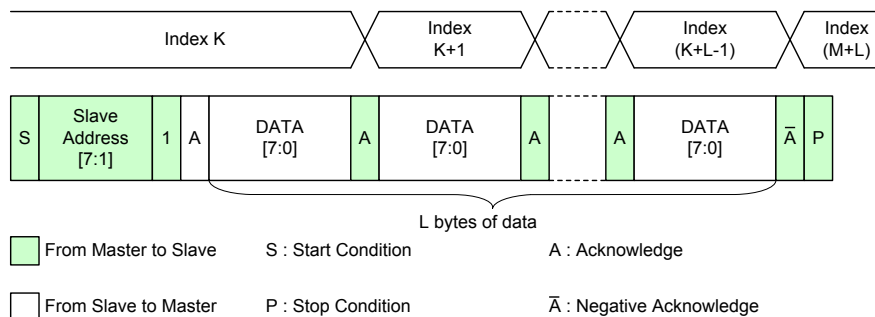

### Sequential Read Starting from Current Location

### Single Write to Random Location


The Master sets the sensor index value to M by designating the sensor slave address with a write request, and designating the address (M). After that the Master can write the value in the designated register by transmitting the data to be written. After writing the necessary data, the Master generates the Stop Condition to end the communication.

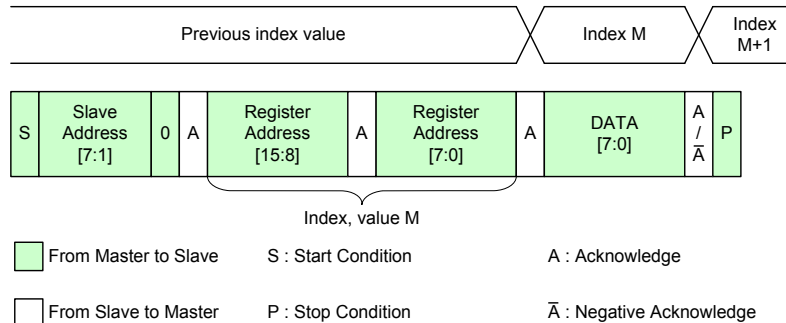

### Single Write to Random Location

### Sequential Write Starting from Random Location

The Master can write a value to register address M by designating the sensor slave address with a write request, designating the address (M), and then transmitting the data to be written. After the sensor receives the write data, it outputs an Acknowledge and at the same time increments the register address, so the Master can write to the next address simply by continuing to transmit data. After the Master writes the necessary number of bytes, it generates the Stop Condition to end the communication.

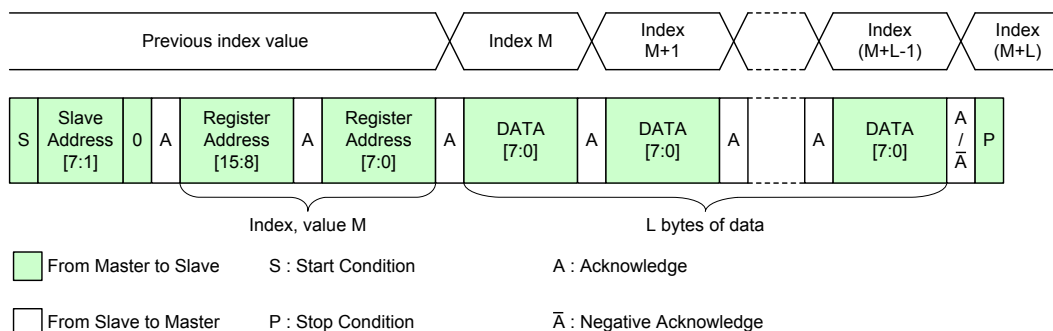

### Sequential Write Starting from Random Location

---

## Register Map

This sensor has a total of 4352 (256 × 17) bytes of registers. Each register has an address consisting of the MSB address in the range 30h to 40h and the LSB address in the range 00h to FFh. Use the default values for addresses not listed in the Register Map. Since there are registers that need to be changed from the default values, make sure that the sensor control side can set a total of 4352 bytes.

There are three different register reflection timings.

About the reflection timing column of the Register Map, registers noted as “I” are reflected immediately after writing to register, registers noted as “S” are set during standby mode and reflected after standby cancel, registers noted as “V” are reflected at “Frame reflection register reflection timing” described in item “Register Communication Timing (I<sup>2</sup>C)” in section “Setting Registers Using Serial Communication”.

Do not communicate or set to an address not listed in the Register Map. Doing so may result in operation errors. However, registers may be added to addresses not currently listed in the Register Map, so be prepared to enable register communication for the entire range from addresses 3000h to 40FFh.

- \* For registers in which the description column is written in red, change the default value to the setting value written in red after reset.
- \*\* Only the gain setting is reflected and output in the frame that is delayed by one frame from the set frame.
- \*\*\* Settings other than those described in the description column are prohibited.

(1) Registers corresponding to address = 30\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3000h	0	STANDBY	Standby 0: Operating 1: Standby	1h	01h	I
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3001h	0	REGHOLD	Register hold (Function not to update V reflection register) 0: Invalid 1: Valid	0h	00h	I
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3002h	0	XMSTA	Setting of master mode operation 0: Master mode operation start 1: Master mode operation stop	1h	01h	I
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3003h	0	XMASTER	Select Master /Slave mode 0: Master mode 1: Slave mode	0h	00h	S
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—



Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3008h	0	BCWAIT_TIME [9:0]	LSB	0FFh	FFh	S
	1					
	2					
	3					
	4					
	5		The value is set according to INCK. See "INCK Setting".			
	6					
3009h	7					
	0	—	MSB	0h	00h	—
	1					
	2		Fixed to "0h"			
	3		Fixed to "0h"			
	4		Fixed to "0h"			
	5		Fixed to "0h"			
	6		Fixed to "0h"			
300Ah	7		Fixed to "0h"			
	0	CPWAIT_TIME [9:0]	LSB	0B6h	B6h	S
	1					
	2					
	3					
	4					
	5		The value is set according to INCK. See "INCK Setting".			
	6					
300Bh	7					
	0	—	MSB	0h	A0h	—
	1					
	2		Fixed to "0h"			
	3		Fixed to "0h"			
	4		Fixed to "0h"			
	5		Fixed to "1h"			
	6		Fixed to "0h"			
301Ch	7		Fixed to "1h"			
	0	WINMODE [3:0]	Window mode setting 0: All-pixel mode, Horizontal/Vertical 2/2-line binning 4: Window cropping mode	0h	00h	V
	1					
	2					
	3					
	4		Fixed to "0h"			
	5		Fixed to "0h"			
	6		Fixed to "0h"			
	7		Fixed to "0h"			

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3020h	0	HADD	Mode setting 0h: All-pixel mode 1h: Horizontal 2 binning	0h	00h	S
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3021h	0	VADD	Mode setting 0h: All-pixel mode 1h: Vertical 2 binning	0h	00h	S
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3022h	0	ADDMODE [1:0]	Mode setting 0h: All-pixel mode 1h: Horizontal/Vertical 2/2-line binning	0h	00h	S
	1					
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—

Address	bit	Register name	Description	Default value after reset		Reflection timing			
				By register	By address				
3024h	0	VMAX [19:0]	LSB	008CAh	CAh	V			
	1								
	2								
	3								
	4								
	5								
	6								
7	In sensor master mode Vertical period								
3025h	0		For details, see the item of “Slave Mode and Master Mode” in the section of “Description of Various Functions”.				08h	V	
	1								
	2								
	3								
	4								
	5								
	6								
3026h	7						00h		
	0								
	1								
	2								
	3		MSB						
	4		—	0h					
	5		—	0h					
	6		—	0h					
3028h	7		—	0h					
	0	HMAX [15:0]	LSB	0226h	26h	V			
	1								
	2								
	3								
	4								
	5								
	6								
7	In sensor master mode Horizontal period								
3029h	0		For details, see the item of “Slave Mode and Master Mode” in the section of “Description of Various Functions”.				02h	V	
	1								
	2								
	3								
	4								
	5								
	6								
	7		MSB						

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3030h	0	HREVERSE	Horizontal direction Readout inversion control 0: Normal 1: Inverted	0h	00h	V
	1	VREVERSE	Vertical direction Readout inversion control 0: Normal 1: Inverted	0h		V
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3031h	0	ADBIT [1:0]	AD conversion bit width setting 0: AD 10-bit 1: AD 12-bit ( 11 bits + digital dither )	1h	01h	S
	1					
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3032h	0	MDBIT	Number of output bits setting 0: 10-bit 1: 12-bit	1h	01h	S
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
3033h	0	SYS_MODE [3:0]	Output IF mode setting 5: 891 Mbps 7: 594 Mbps 8: 1440 / 1485 Mbps 9: 720 Mbps	4h	04h	S
	1					
	2					
	3					
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3040h	0	PIX_HST [12:0]	LSB	0000h	00h	V
	1					
	2					
	3					
	4					
	5		In window cropping mode Start position (Horizontal direction)			
	6					
3041h	7					
	0	—	Multiples of 2	0h	00h	—
	1					
	2					
	3					
	4		MSB			
	5		Fixed to "0h"			
3042h	6		Fixed to "0h"			
	7		Fixed to "0h"			
3043h	0	PIX_HWIDTH [12:0]	LSB	0F18h	18h	V
	1					
	2					
	3					
	4					
	5		In window cropping mode Cropping width (Horizontal direction)			
	6					
3044h	7					
	0	—	Multiples of 24	0h	0Fh	—
	1					
	2					
	3					
	4		MSB			
	5		Fixed to "0h"			
3045h	6		Fixed to "0h"			
	7		Fixed to "0h"			
3046h	0	PIX_VST [12:0]	LSB	0000h	00h	V
	1					
	2					
	3					
	4		In window cropping mode Start position (Vertical direction)			
	5					
	6					
3047h	7					
	0	—	Designated in Line × 2, Multiples of 4	0h	00h	—
	1					
	2					
	3					
	4		MSB			
	5		Fixed to "0h"			
3048h	6		Fixed to "0h"			
	7		Fixed to "0h"			

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3046h	0	PIX_VWIDTH [12:0]	LSB	1120h	20h	V
	1					
	2					
	3					
	4		In window cropping mode Cropping width (Vertical direction)			
	5					
	6					
3047h	7		Designated in Line × 2, Multiples of 4			
	0	—		0h	11h	—
	1					
	2					
	3					
	4		MSB			
	5		Fixed to "0h"			
	6		Fixed to "0h"			
3050h	7		Fixed to "0h"			
	0	SHR0 [19:0]	LSB	00066h	66h	V
	1					
	2					
	3					
	4					
	5					
	6					
3051h	7					
	0	—		0h	00h	—
	1					
	2					
	3					
	4					
	5					
	6					
3052h	7					
	0	—		0h	00h	—
	1					
	2					
	3		MSB			
	4		Fixed to "0h"			
	5		Fixed to "0h"			
	6		Fixed to "0h"			
	7		Fixed to "0h"			

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3090h	0	GAIN_PGC_0 [8:0]	LSB	000h	00h	V
	1					
	2					
	3					
	4					
	5					
	6					
	7					
3091h	0		MSB	0h	00h	—
	1	—	Fixed to "0h"			
	2	—	Fixed to "0h"			
	3	—	Fixed to "0h"			
	4	—	Fixed to "0h"			
	5	—	Fixed to "0h"			
	6	—	Fixed to "0h"			
	7	—	Fixed to "0h"			
30C0h	0	XVSOUTSEL [1:0]	XVS pin setting in master mode 0: Fixed to Low 2: VSYNC output	2h	2Ah	I
	1					
	2	XHSOUTSEL [1:0]	XHS pin setting in master mode 0: Fixed to Low 2: HSYNC output	2h		I
	3					
	4	—	Fixed to "2h"	2h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
30C1h	0	XVS_DRV [1:0]	XVS pin setting 0: XVS output (Master mode) 3: HiZ (Slave mode)	3h	0Fh	S
	1					
	2	XHS_DRV [1:0]	XHS pin setting 0: XHS output (Master mode) 3: HiZ (Slave mode)	3h		S
	3					
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
30CCh	0	—	Fixed to “0h”	0h	00h	—
	1	—	Fixed to “0h”	0h		—
	2	—	Fixed to “0h”	0h		—
	3	—	Fixed to “0h”	0h		—
	4	XVSLNG [1:0]	XVS pulse width setting in master mode. 0: 1H 1: 2H 2: 4H 3: 8H	0h		I
	5					
	6	—	Fixed to “0h”	0h		—
	7	—	Fixed to “0h”	0h		—
30CDh	0	—	Fixed to “0h”	0h	00h	—
	1	—	Fixed to “0h”	0h		—
	2	—	Fixed to “0h”	0h		—
	3	—	Fixed to “0h”	0h		—
	4	XHSLNG [1:0]	XHS pulse width setting in master mode. 0: 16clock 1: 32clock 2: 64clock 3: 128clock	0h		I
	5					
	6	—	Fixed to “0h”	0h		—
	7	—	Fixed to “0h”	0h		—
30D9h	0	DIG_CLP_VSTART [4:0]	The value is set according to Readout mode. 2: Horizontal / Vertical 2/2-line binning mode 6: All-pixel scan mode	06h	06h	S
	1					
	2					
	3					
	4	—	Fixed to “0h”	0h		—
	5					
	6					
	7					
30DAh	0	DIG_CLP_VNUM [1:0]	The value is set according to Readout mode. 1: Horizontal / Vertical 2/2-line binning mode 2: All-pixel scan mode	2h	02h	S
	1					
	2	—	Fixed to “0h”	0h		—
	3	—	Fixed to “0h”	0h		—
	4	—	Fixed to “0h”	0h		—
	5	—	Fixed to “0h”	0h		—
	6	—	Fixed to “0h”	0h		—
	7	—	Fixed to “0h”	0h		—



Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
30E2h	0	BLKLEVEL [9:0]	LSB	032h	32h	I
	1					
	2					
	3		Black level offset value setting			
	4					
	5		10-bit readout mode: 1digit/1h			
	6		12-bit readout mode: 4digit/1h			
	7					
30E3h	0		MSB	0h	00h	—
	1					
	2	—	Fixed to "0h"			
	3	—	Fixed to "0h"			
	4	—	Fixed to "0h"			
	5	—	Fixed to "0h"			
	6	—	Fixed to "0h"			
	7	—	Fixed to "0h"			

## (2) Registers corresponding to address = 31\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3115h	[7:0]	INCKSEL1 [7:0]	The value is set according to INCK. See "INCK Setting".	00h	00h	S
3116h	[7:0]	INCKSEL2 [7:0]	The value is set according to INCK. See "INCK Setting".	28h	28h	S
3118h	0	INCKSEL3 [10:0]	LSB	0C0h	C0h	S
	1					
	2					
	3					
	4					
	5					
	6					
	7					
3119h	0	—	MSB	0h	00h	—
	1					
	2					
	3		Fixed to "0h"			
	4		Fixed to "0h"			
	5		Fixed to "0h"			
	6		Fixed to "0h"			
	7		Fixed to "0h"			
311Ah	0	INCKSEL4 [10:0]	LSB	0E0h	E0h	S
	1					
	2					
	3					
	4					
	5					
	6					
	7					
311Bh	0	—	MSB	0h	00h	—
	1					
	2					
	3		Fixed to "0h"			
	4		Fixed to "0h"			
	5		Fixed to "0h"			
	6		Fixed to "0h"			
	7		Fixed to "0h"			
311Eh	[7:0]	INCKSEL5 [7:0]	The value is set according to INCK. See "INCK Setting".	28h	28h	S

## (3) Registers corresponding to address = 32\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By Address	
32D4h	[7:0]	—	Set to "21h"	20h	20h	S
32ECh	[7:0]	—	Set to "A1h"	A0h	A0h	S

(4) Registers corresponding to address = 34\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By Address	
344Ch	[7:0]	—	Set to "2Bh"	00h	00h	S
344Dh	[7:0]	—	Set to "01h"	00h	00h	S
344Eh	[7:0]	—	Set to "EDh"	00h	00h	S
344Fh	[7:0]	—	Set to "01h"	00h	00h	S
3450h	[7:0]	—	Set to "F6h"	00h	00h	S
3451h	[7:0]	—	Set to "02h"	00h	00h	S
3452h	[7:0]	—	Set to "7Fh"	00h	00h	S
3453h	[7:0]	—	Set to "03h"	00h	00h	S

(5) Registers corresponding to address = 35\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
358Ah	[7:0]	—	Set to "04h"	06h	06h	S
35A1h	[7:0]	—	Set to "02h"	00h	00h	S
35ECh	[7:0]	—	Set to "27h"	04h	04h	S
35EEh	[7:0]	—	Set to "8Dh"	27h	27h	S
35F0h	[7:0]	—	Set to "8Dh"	29h	29h	S
35F2h	[7:0]	—	Set to "29h"	04h	04h	S

(6) Registers corresponding to address = 36\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By Address	
36BCh	[7:0]	—	Set to "0Ch"	00h	00h	S
36CCh	[7:0]	—	Set to "53h"	FFh	FFh	S
36CDh	[7:0]	—	Set to "00h"	01h	01h	S
36CEh	[7:0]	—	Set to "3Ch"	00h	00h	S
36D0h	[7:0]	—	Set to "8Ch"	FFh	FFh	S
36D1h	[7:0]	—	Set to "00h"	01h	01h	S
36D2h	[7:0]	—	Set to "71h"	00h	00h	S
36D4h	[7:0]	—	Set to "3Ch"	00h	00h	S
36D6h	[7:0]	—	Set to "53h"	FFh	FFh	S
36D7h	[7:0]	—	Set to "00h"	01h	01h	S
36D8h	[7:0]	—	Set to "71h"	00h	00h	S
36DAh	[7:0]	—	Set to "8Ch"	FFh	FFh	S
36DBh	[7:0]	—	Set to "00h"	01h	01h	S

## (7) Registers corresponding to address = 37\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3701h	[7:0]	ADBIT1 [7:0]	The value is set according to the AD conversion bit width. 00h: AD 10-bit 03h: AD 12-bit ( 11 bits + digital dither )	03h	03h	S
3720h	[7:0]	—	Set to "00h"	07h	07h	S
3724h	[7:0]	—	Set to "02h"	0Ah	0Ah	S
3726h	[7:0]	—	Set to "02h"	0Ah	0Ah	S
3732h	[7:0]	—	Set to "02h"	00h	00h	S
3734h	[7:0]	—	Set to "03h"	0Ah	0Ah	S
3736h	[7:0]	—	Set to "03h"	0Ah	0Ah	S
3742h	[7:0]	—	Set to "03h"	00h	00h	S

## (8) Registers corresponding to address = 38\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3862h	[7:0]	—	Set to "E0h"	7Fh	7Fh	S
38CCh	[7:0]	—	Set to "30h"	33h	33h	S
38CDh	[7:0]	—	Set to "2Fh"	33h	33h	S

## (9) Registers corresponding to address = 39\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
395Ch	[7:0]	—	Set to "0Ch"	00h	00h	S
39A4h	[7:0]	—	Set to "07h"	00h	00h	S
39A8h	[7:0]	—	Set to "32h"	1Eh	1Eh	S
39AAh	[7:0]	—	Set to "32h"	1Eh	1Eh	S
39ACh	[7:0]	—	Set to "32h"	19h	19h	S
39AEh	[7:0]	—	Set to "32h"	19h	19h	S
39B0h	[7:0]	—	Set to "32h"	19h	19h	S
39B2h	[7:0]	—	Set to "2Fh"	19h	19h	S
39B4h	[7:0]	—	Set to "2Dh"	19h	19h	S
39B6h	[7:0]	—	Set to "28h"	19h	19h	S
39B8h	[7:0]	—	Set to "30h"	1Eh	1Eh	S
39BAh	[7:0]	—	Set to "30h"	1Eh	1Eh	S
39BCh	[7:0]	—	Set to "30h"	19h	19h	S
39BEh	[7:0]	—	Set to "30h"	19h	19h	S
39C0h	[7:0]	—	Set to "30h"	19h	19h	S
39C2h	[7:0]	—	Set to "2Eh"	19h	19h	S
39C4h	[7:0]	—	Set to "2Bh"	19h	19h	S
39C6h	[7:0]	—	Set to "25h"	19h	19h	S

(10) Registers corresponding to address = 3A\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3A42h	[7:0]	—	Set to "D1h"	11h	11h	S
3A4Ch	[7:0]	—	Set to "77h"	37h	37h	S
3AE0h	[7:0]	—	Set to "02h"	00h	00h	S
3AECh	[7:0]	—	Set to "0Ch"	00h	00h	S

(11) Registers corresponding to address = 3B\*\*h.

Address	bit	Register name	Description	Default value after reset		Reflection timing
				By register	By address	
3B00h	[7:0]	—	Set to "2Eh"	28h	28h	S
3B06h	[7:0]	—	Set to "29h"	23h	23h	S
3B98h	[7:0]	—	Set to "25h"	19h	19h	S
3B99h	[7:0]	—	Set to "21h"	19h	19h	S
3B9Bh	[7:0]	—	Set to "13h"	19h	19h	S
3B9Ch	[7:0]	—	Set to "13h"	19h	19h	S
3B9Dh	[7:0]	—	Set to "13h"	19h	19h	S
3B9Eh	[7:0]	—	Set to "13h"	16h	16h	S
3BA1h	[7:0]	—	Set to "00h"	04h	04h	S
3BA2h	[7:0]	—	Set to "06h"	09h	09h	S
3BA3h	[7:0]	—	Set to "0Bh"	09h	09h	S
3BA4h	[7:0]	—	Set to "10h"	0Dh	0Dh	S
3BA5h	[7:0]	—	Set to "14h"	0Dh	0Dh	S
3BA6h	[7:0]	—	Set to "18h"	0Dh	0Dh	S
3BA7h	[7:0]	—	Set to "1Ah"	0Dh	0Dh	S
3BA8h	[7:0]	—	Set to "1Ah"	0Dh	0Dh	S
3BA9h	[7:0]	—	Set to "1Ah"	0Dh	0Dh	S
3BACH	[7:0]	—	Set to "EDh"	00h	00h	S
3BADh	[7:0]	—	Set to "01h"	00h	00h	S
3BAEh	[7:0]	—	Set to "F6h"	22h	22h	S
3BAFh	[7:0]	—	Set to "02h"	00h	00h	S
3BB0h	[7:0]	—	Set to "A2h"	84h	84h	S
3BB1h	[7:0]	—	Set to "03h"	00h	00h	S
3BB2h	[7:0]	—	Set to "E0h"	A2h	A2h	S
3BB3h	[7:0]	—	Set to "03h"	00h	00h	S
3BB4h	[7:0]	—	Set to "E0h"	11h	11h	S
3BB5h	[7:0]	—	Set to "03h"	01h	01h	S
3BB6h	[7:0]	—	Set to "E0h"	ECh	ECh	S
3BB7h	[7:0]	—	Set to "03h"	01h	01h	S
3BB8h	[7:0]	—	Set to "E0h"	7Ah	7Ah	S
3BBAh	[7:0]	—	Set to "E0h"	D1h	D1h	S
3BBCh	[7:0]	—	Set to "DAh"	ECh	ECh	S
3BBEh	[7:0]	—	Set to "88h"	F5h	F5h	S
3BC0h	[7:0]	—	Set to "44h"	43h	43h	S
3BC2h	[7:0]	—	Set to "7Bh"	7Ah	7Ah	S
3BC4h	[7:0]	—	Set to "A2h"	A1h	A1h	S
3BC8h	[7:0]	—	Set to "BDh"	D1h	D1h	S
3BCAh	[7:0]	—	Set to "BDh"	DBh	DBh	S

(12) Registers corresponding to address = 40\*\*h.

Address	bit	Register name	Description	Default value		Reflection timing
				By register	By address	
4001h	0	LANEMODE [2:0]	Output interface selection 1: CSI-2 2lane 3: CSI-2 4lane	3h	03h	S
	1					
	2					
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
4004h	[7:0]	TXCLKESC_FREQ [15:0]	The value is set according to INCK. See "INCK Setting".	1290h	90h	S
4005h	[7:0]				12h	
400Ch	0	INCKSEL6	The value is set according to INCK. See "INCK Setting".	1h	01h	S
	1	—	Fixed to "0h"	0h		—
	2	—	Fixed to "0h"	0h		—
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—
4018h	[7:0]	TCLKPOST [15:0]	Global timing setting	00B7h	B7h	S
4019h	[7:0]				00h	
401Ah	[7:0]	TCLKPREPARE [15:0]	Global timing setting	0067h	67h	S
401Bh	[7:0]				00h	
401Ch	[7:0]	TCLKTRAIL [15:0]	Global timing setting	006Fh	6Fh	S
401Dh	[7:0]				00h	
401Eh	[7:0]	TCLKZERO [15:0]	Global timing setting	01DFh	DFh	S
401Fh	[7:0]				01h	
4020h	[7:0]	THSPREPARE [15:0]	Global timing setting	006Fh	6Fh	S
4021h	[7:0]				00h	
4022h	[7:0]	THSZERO [15:0]	Global timing setting	00CFh	CFh	S
4023h	[7:0]				00h	
4024h	[7:0]	THSTRAIL [15:0]	Global timing setting	006Fh	6Fh	S
4025h	[7:0]				00h	
4026h	[7:0]	THSEXIT [15:0]	Global timing setting	00B7h	B7h	S
4027h	[7:0]				00h	
4028h	[7:0]	TLPX [15:0]	Global timing setting	005Fh	5Fh	S
4029h	[7:0]				00h	
4074h	0	INCKSEL7 [2:0]	The value is set according to INCK. See "INCK Setting".	0h	00h	S
	1					
	2					
	3	—	Fixed to "0h"	0h		—
	4	—	Fixed to "0h"	0h		—
	5	—	Fixed to "0h"	0h		—
	6	—	Fixed to "0h"	0h		—
	7	—	Fixed to "0h"	0h		—

## Readout Drive mode

### Operating mode

The table below shows the operating modes available with this sensor.

These frame rates indicate the maximum rates for each mode. For typical frame rates, see “List of Setting Register” in the section of “Image Data Output Format”.

Mode	Lane	Data rate [Mbps/Lane]	AD conversion [bit]	Output bit width [bit]	Frame rate [frame/s]	Recording Pixels		INCK [MHz]	1H period [Clock]	1V period [XHS]
						H [pixels]	V [lines]			
All-pixel	2	1440	10	10	31.6	3840	2160	24, 72	1016 <sup>(*)2</sup>	2238
		891	10	10	19.8			27, 37.125, 74.25	1668 <sup>(*)1</sup>	
			12	12	16.6				1990 <sup>(*)1</sup>	
		720	10	10	16.2			24, 72	1985 <sup>(*)2</sup>	
		594	10	10	13.4			27, 37.125, 74.25	2475 <sup>(*)1</sup>	
			12	12	11.2				2958 <sup>(*)1</sup>	
	4	1485	10	10	61.6			27, 37.125, 74.25	538 <sup>(*)1</sup>	
			12	12	52.2				635 <sup>(*)1</sup>	
		1440	10	10	60.4			24, 72	532 <sup>(*)2</sup>	
			12	12	51.1				629 <sup>(*)2</sup>	
		891	10	10	38.5			27, 37.125, 74.25	861 <sup>(*)1</sup>	
			12	12	32.4				1022 <sup>(*)1</sup>	
		720	10	10	31.6			24, 72	1017 <sup>(*)2</sup>	
			12	12	26.5				1210 <sup>(*)2</sup>	
		594	10	10	26.2			27, 37.125, 74.25	1265 <sup>(*)1</sup>	
			12	12	22.0				1506 <sup>(*)1</sup>	
Horizontal/ Vertical 2/2-line binning	2	891	10	12	32.2	1920	1080	27, 37.125, 74.25	1030 <sup>(*)1</sup>	
		594	10	12	21.8			27, 37.125, 74.25	1518 <sup>(*)1</sup>	
	4	1440	10	12	88.1			24, 72	365 <sup>(*)2</sup>	
		891	10	12	61.2			27, 37.125, 74.25	542 <sup>(*)1</sup>	
		720	10	12	50.7			24, 72	634 <sup>(*)2</sup>	
		594	10	12	42.2			27, 37.125, 74.25	786 <sup>(*)1</sup>	

(\*)1 Clock frequency = 74.25 [MHz]

(\*)2 Clock frequency = 72 [MHz]

Image Data Output Format (CSI-2 output)


Frame Format

Each line of each image frame is output like the General Frame Format of CSI-2. Types of data in each line are shown below.

DATA Type

Header [5:0]	Name	Setting register (I <sup>2</sup> C)	Description
00h	Frame Start Code	N/A	FS
01h	Frame End Code	N/A	FE
12h	Embedded Data	N/A	Embedded data
2Bh	RAW10	Address: 3032h MDBIT [0]	0A0Ah
2Ch	RAW12		0C0Ch
37h	OB Data	N/A	Vertical OB line data

Frame Structure

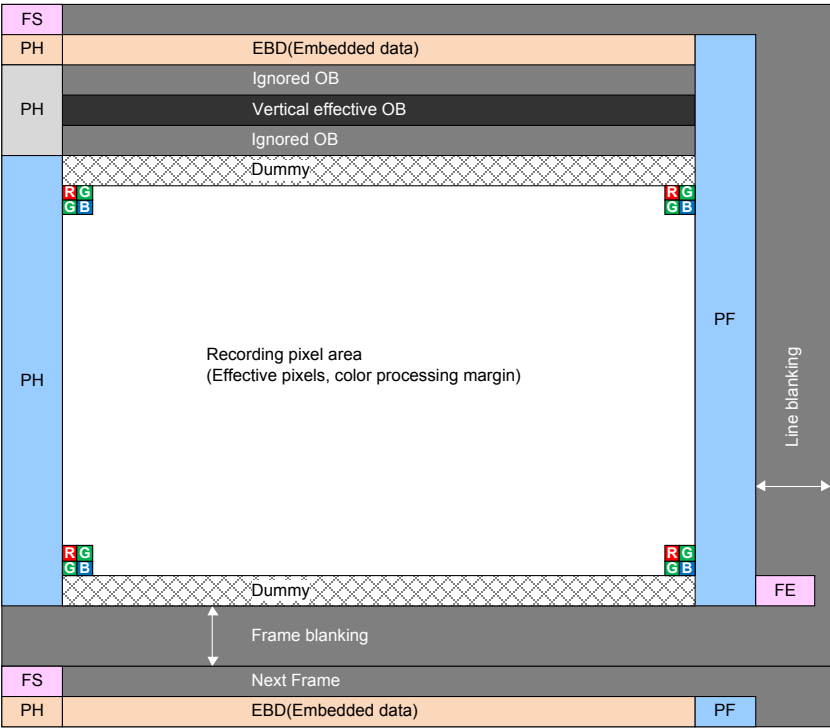

Frame Structure of CSI-2 output




Embedded Data Line

The Embedded data line is output in a line following the sync code FS.


Embedded Data Format



RAW10

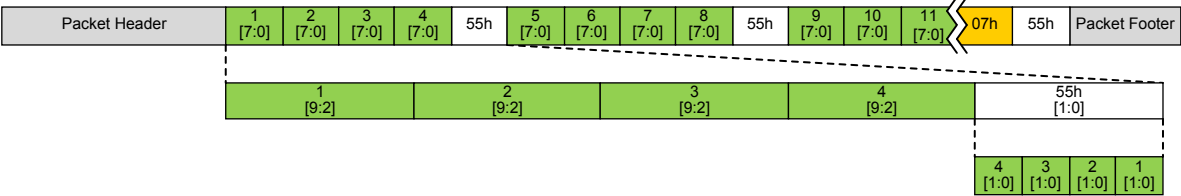

RAW12

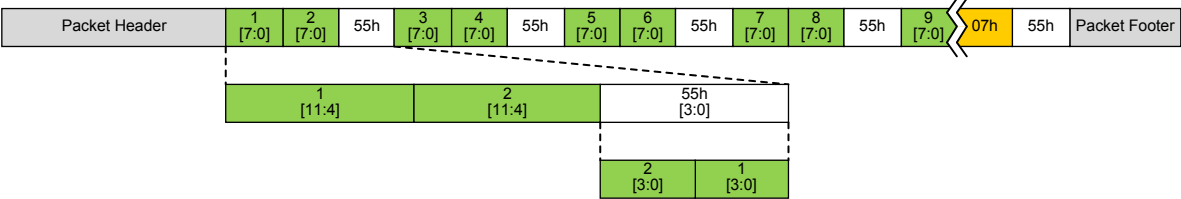

The detailed output is shown below.

Pixel (8bit)	bit	I <sup>2</sup> C address [HEX]	Data Byte Description	Description
1	[7:0]	—	—	ignored
2	[3:0]	301C[3:0]	WINMODE	
3	[3:0]	—	—	ignored
	[4]	3030[0]	HREVERSE	
	[6:5]	3022[1:0]	ADDMODE	
	[7]	—	—	ignored
4 to 8	[7:0]	—	—	ignored
9	[4:0]	—	—	ignored
	[5]	3030[1]	VREVERSE	
	[7:6]	—	—	ignored
10	[7:0]	—	—	ignored
11	[5:0]	—	—	ignored
	[7:6]	3031[1:0]	ADBIT	
12	[7:0]	—	—	ignored
13	[2:0]	4001[2:0]	LANEMODE	
	[3]	3032[0]	MDBIT	
	[7:4]	3033[3:0]	SYS_MODE	
14 to 23	[7:0]	—	—	ignored
24	[7:0]	3050[7:0]	SHR0	
25	[7:0]	3051[7:0]		
26	[3:0]	3052[3:0]		
	[7:4]	—	—	ignored
27 to 53	[7:0]	—	—	ignored
54	[7:0]	30E2[7:0]	BLKLEVEL	
55	[1:0]	30E3[1:0]		
	[7:2]	—	—	ignored
56 to 216	[7:0]	—	—	ignored

Output data is Data[7:0] = 00h from 217 to 224 pixel.

Output data is Data[7:0] = 07h from 225 to end pixel.

**Image Data Output Format**

The table below shows the register setting examples of typical frame rates.

For frame rates other than the typical frame rates, the frame rate can be calculated using the following formula.

Frame rate [frame / s] =  $1 / (V_{TTL} \times (1H \text{ period}))$

$V_{TTL}$  : Length of one frame in line units or VMAX

“1V period” or more in the table of “Operating mode”


1H period (set in units [s]) : “1H period” or more in the table of “Operating mode”

## All-pixel mode


## List of Setting Register

Address	bit	Register Name	Initial Value	CSI-2 serial / 2lane				Remarks					
				10	15	15.74	30.01	[frame/s]					
				594	891	720	1440	[Mbps/lane]					
				44.5	29.7	28.3	14.9	1H period [μs]					
3008h	[7:0]	BCWAIT_TIME	0FFh	See “INCK Setting”.									
3009h	[1:0]												
300Ah	[7:0]	CPWAIT_TIME	0B6h										
300Bh	[1:0]												
301Ch	[3:0]	WINMODE	0h	0h				All-pixel mode					
3022h	[1:0]	ADDMODE	0h	0h				All-pixel mode					
3024h	[7:0]	VMAX	8CAh	8CAh									
3025h	[7:0]												
3026h	[3:0]												
3028h	[7:0]	HMAX	226h	CE4h	898h	7F0h	42Ah						
3029h	[7:0]												
3030h	[0]	HREVERSE	0h	0h or 1h				0: Nor. , 1: Inv.					
	[1]	VREVERSE	0h	0h or 1h				0: Nor. , 1: Inv.					
3031h	[1:0]	ADBIT	1h	1h / 0h	1h / 0h	0h	0h	0: 10-bit, 1: 12-bit					
3032h	[0]	MDBIT	1h	1h / 0h	1h / 0h	0h	0h	0: 10-bit, 1: 12-bit					
3033h	[3:0]	SYS_MODE	4h	7h	5h	9h	8h						
3115h	[7:0]	INCKSEL1	00h	See “INCK Setting”.									
3116h	[7:0]	INCKSEL2	28h										
3118h	[7:0]	INCKSEL3	0C0h										
3119h	[2:0]												
311Ah	[7:0]	INCKSEL4	0E0h										
311Bh	[2:0]												
311Eh	[7:0]	INCKSEL5	28h										
3200h to 3BFFh	[7:0]	See “Register Map”.											
4001h	[2:0]	LANEMODE	3h	1h				2lane					
4004h	[7:0]	TXCLKES_F	1290h	See “INCK Setting”.									
4005h	[7:0]	REQ											
400Ch	[0]	INCKSEL6	1h										
4018h	[7:0]	TCLKPOST	00B7h	0067h	007Fh	006Fh	009Fh	Global timing					
4019h	[7:0]												
401Ah	[7:0]	TCLKPREPAR E	0067h	0027h	0037h	002Fh	0057h	Global timing					
401Bh	[7:0]												
401Ch	[7:0]	TCLKTRAIL	006Fh	0027h	0037h	002Fh	0057h	Global timing					
401Dh	[7:0]												
401Eh	[7:0]	TCLKZERO	01DFh	00B7h	00F7h	00BFh	0187h	Global timing					
401Fh	[7:0]												
4020h	[7:0]	THSPREPARE	006Fh	002Fh	003Fh	002Fh	005Fh	Global timing					
4021h	[7:0]												
4022h	[7:0]	THSZERO	00CFh	004Fh	006Fh	0057h	00A7h	Global timing					
4023h	[7:0]												
4024h	[7:0]	THSTRAIL	006Fh	002Fh	003Fh	002Fh	005Fh	Global timing					
4025h	[7:0]												
4026h	[7:0]	THSEXIT	00B7h	0047h	005Fh	004Fh	0097h	Global timing					
4027h	[7:0]												
4028h	[7:0]	TLPX	005Fh	0027h	002Fh	0027h	004Fh	Global timing					
4029h	[7:0]												
4074h	[2:0]	INCKSEL7	0h	See “INCK Setting”.									

Address	bit	Register Name	Initial Value	CSI-2 serial / 4lane					Remarks
				20 / 25	25 / 30.01	30	30 / 60	30.01 / 60.03	[frame/s]
				594	720	891	1485	1440	[Mbps/lane]
				22.3 / 17.8	17.8 / 14.9	14.9	10.2 / 7.5	14.9 / 7.5	1H period [μs]
3008h	[7:0]	BCWAIT_TIME	0FFh	See “INCK Setting”.					
3009h	[1:0]								
300Ah	[7:0]	CPWAIT_TIME	0B6h						
300Bh	[1:0]								
301Ch	[3:0]	WINMODE	0h	0h					All-pixel mode
3022h	[1:0]	ADDMODE	0h	0h					All-pixel mode
3024h	[7:0]	VMAX	8CAh	8CAh			CE4h / 8CAh	8CAh	
3025h	[7:0]								
3026h	[3:0]								
3028h	[7:0]	HMAX	226h	672h / 528h	500h / 42Ah	44Ch	2EEh / 226h	42Ah / 215h	
3029h	[7:0]								
3030h	[0]	HREVERSE	0h	0h or 1h					0: Nor. , 1: Inv.
	[1]	VREVERSE	0h	0h or 1h					0: Nor. , 1: Inv.
3031h	[1:0]	ADBIT	1h	1h / 0h					0: 10-bit, 1: 12-bit
3032h	[0]	MDBIT	1h	1h / 0h					0: 10-bit, 1: 12-bit
3033h	[3:0]	SYS_MODE	4h	7h	9h	5h	8h	8h	
3115h	[7:0]	INCKSEL1	00h	See “INCK Setting”.					
3116h	[7:0]	INCKSEL2	28h						
3118h	[7:0]	INCKSEL3	0C0h						
3119h	[2:0]								
311Ah	[7:0]	INCKSEL4	0E0h						
311Bh	[2:0]								
311Eh	[7:0]	INCKSEL5	28h						
3200h to 3BFFh	[7:0]	See “Register Map”.							
4001h	[2:0]	LANEMODE	3h	3h					4lane
4004h	[7:0]	TXCLKES_F	1290h	See “INCK Setting”.					
4005h	[7:0]	REQ							
400Ch	[0]	INCKSEL6	1h						
4018h	[7:0]	TCLKPOST	00B7h	0067h	006Fh	007Fh	00A7h	009Fh	Global timing
4019h	[7:0]								
401Ah	[7:0]	TCLKPREPAR E	0067h	0027h	002Fh	0037h	0057h	0057h	Global timing
401Bh	[7:0]								
401Ch	[7:0]	TCLKTRAIL	006Fh	0027h	002Fh	0037h	005Fh	0057h	Global timing
401Dh	[7:0]								
401Eh	[7:0]	TCLKZERO	01DFh	00B7h	00BFh	00F7h	0197h	0187h	Global timing
401Fh	[7:0]								
4020h	[7:0]	THSPREPARE	006Fh	002Fh	002Fh	003Fh	005Fh	005Fh	Global timing
4021h	[7:0]								
4022h	[7:0]	THSZERO	00CFh	004Fh	0057h	006Fh	00AFh	00A7h	Global timing
4023h	[7:0]								
4024h	[7:0]	THSTRAIL	006Fh	002Fh	002Fh	003Fh	005Fh	005Fh	Global timing
4025h	[7:0]								
4026h	[7:0]	THSEXIT	00B7h	0047h	004Fh	005Fh	009Fh	0097h	Global timing
4027h	[7:0]								
4028h	[7:0]	TLPX	005Fh	0027h	0027h	002Fh	004Fh	004Fh	Global timing
4029h	[7:0]								
4074h	[2:0]	INCKSEL7	0h	See “INCK Setting”.					

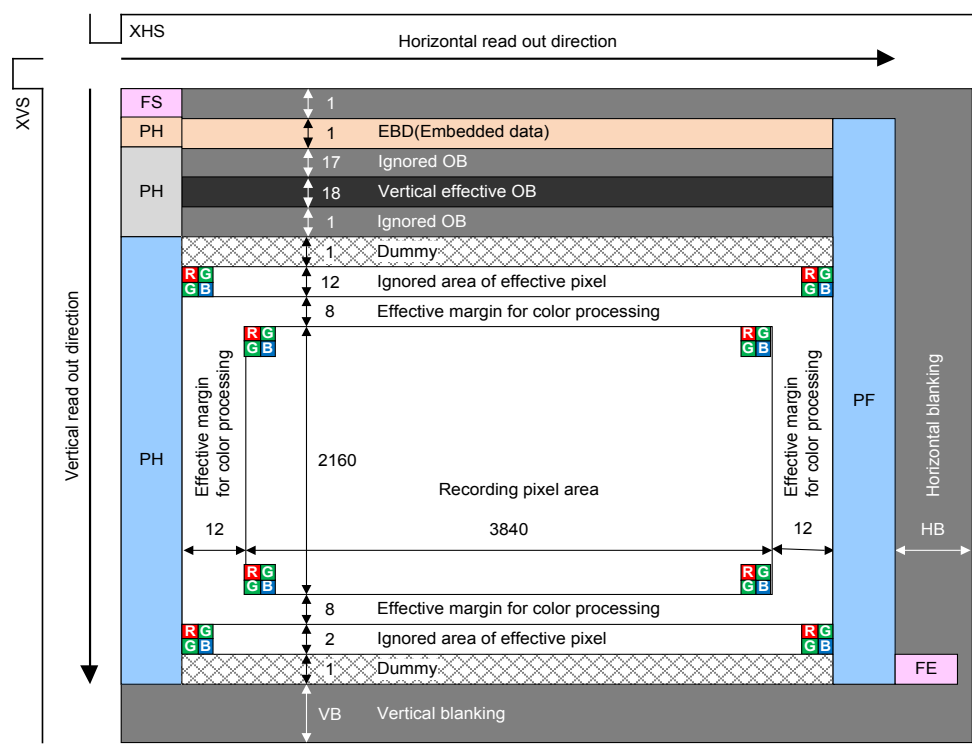

Pixel Array Image Drawing in All-pixel mode

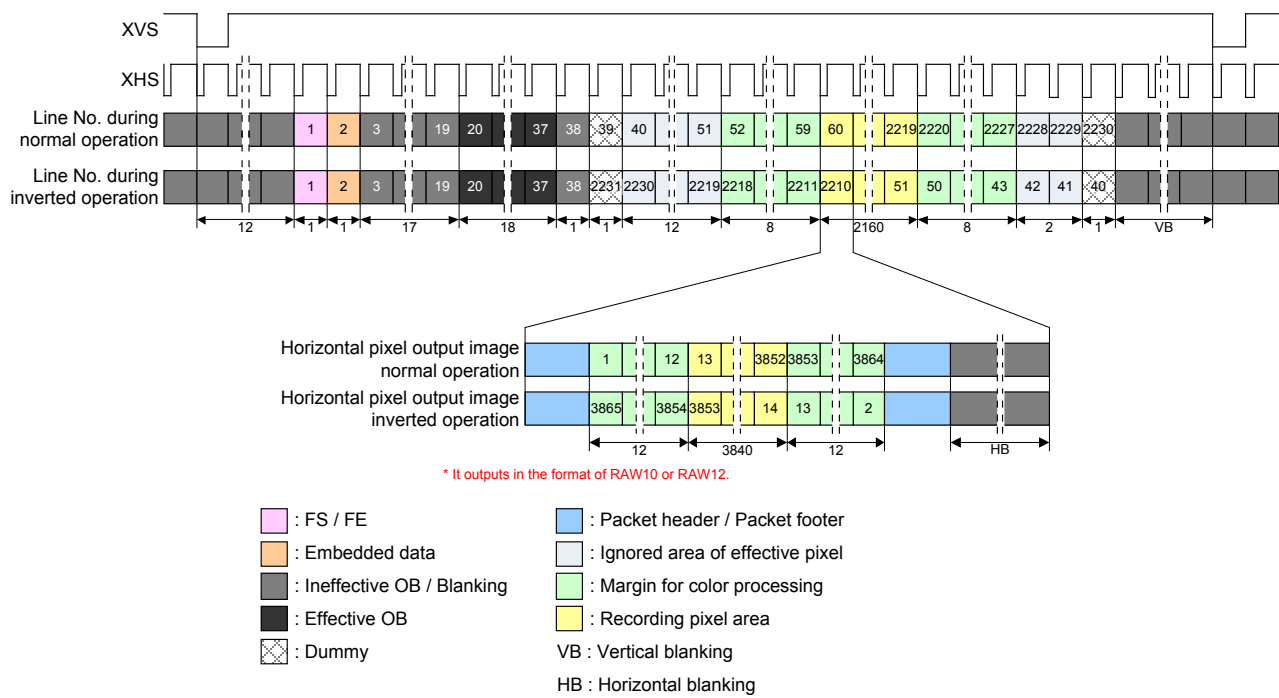

Drive Timing Chart for All-pixel mode


## Horizontal/Vertical 2/2-line binning mode

## List of Setting Register


Address	bit	Register Name	Initial Value	CSI-2 serial / 2lane		CSI-2 serial / 4lane				Remarks							
				10	15	20	25	30	30.01	[frame/s]							
				594	891	594	720	891	1440	[Mbps/lane]							
				44.5	29.7	22.3	17.8	14.9	14.9	1H period [μs]							
3008h	[7:0]	BCWAIT_TIME	0FFh	See “INCK Setting”.													
3009h	[1:0]																
300Ah	[7:0]	CPWAIT_TIME	0B6h														
300Bh	[1:0]																
301Ch	[3:0]	WINMODE	0h	0h						All-pixel mode							
3020h	[0]	HADD	0h	1h						Horizontal 2 binning							
3021h	[0]	VADD	0h	1h						Vertical 2 binning							
3022h	[1:0]	ADDMODE	0h	1h						H/V 2/2-line binning							
3024h	[7:0]	VMAX	8CAh	8CAh													
3025h	[7:0]																
3026h	[3:0]																
3028h	[7:0]	HMAX	226h	CE4h	898h	672h	500h	44Ch	42Ah								
3029h	[7:0]																
3030h	[0]	HREVERSE	0h	0h or 1h						0: Nor. , 1: Inv.							
	[1]	VREVERSE	0h	0h or 1h						0: Nor. , 1: Inv.							
3031h	[1:0]	ADBIT	1h	0h						10-bit							
3032h	[0]	MDBIT	1h	1h						12-bit							
3033h	[3:0]	SYS_MODE	4h	7h	5h	7h	9h	5h	8h								
30D9h	[4:0]	DIG_CLP_VST ART	06h	02h						H/V 2/2-line binning							
30DAh	[1:0]	DIG_CLP_VNU M	2h	1h						H/V 2/2-line binning							
3115h	[7:0]	INCKSEL1	00h	See “INCK Setting”.													
3116h	[7:0]	INCKSEL2	28h														
3118h	[7:0]	INCKSEL3	0C0h														
3119h	[2:0]																
311Ah	[7:0]	INCKSEL4	0E0h														
311Bh	[2:0]																
311Eh	[7:0]	INCKSEL5	28h														
3200h to 3BFFh	[7:0]	See “Register Map”.															
4001h	[2:0]	LANEMODE	3h	1h		3h				2lane							
4004h	[7:0]	TXCLKES_F	1290h	See “INCK Setting”.													
4005h	[7:0]	REQ															
400Ch	[0]	INCKSEL6	1h														
4018h	[7:0]	TCLKPOST	00B7h	0067h	007Fh	0067h	006Fh	007Fh	009Fh	Global timing							
4019h	[7:0]																
401Ah	[7:0]	TCLKPREPAR E	0067h	0027h	0037h	0027h	002Fh	0037h	0057h	Global timing							
401Bh	[7:0]																
401Ch	[7:0]	TCLKTRAIL	006Fh	0027h	0037h	0027h	002Fh	0037h	0057h	Global timing							
401Dh	[7:0]																
401Eh	[7:0]	TCLKZERO	01DFh	00B7h	00F7h	00B7h	00BFh	00F7h	0187h	Global timing							
401Fh	[7:0]																
4020h	[7:0]	THSPREPREARE	006Fh	002Fh	003Fh	002Fh	002Fh	003Fh	005Fh	Global timing							
4021h	[7:0]																
4022h	[7:0]	THSZERO	00CFh	004Fh	006Fh	004Fh	0057h	006Fh	00A7h	Global timing							
4023h	[7:0]																

Address	bit	Register Name	Initial Value	CSI-2 serial / 2lane		CSI-2 serial / 4lane				Remarks
				10	15	20	25	30	30.01	
				594	891	594	720	891	1440	
4024h	[7:0]	THSTRAIL	006Fh	002Fh	003Fh	002Fh	002Fh	003Fh	005Fh	Global timing
4025h	[7:0]									
4026h	[7:0]	THSEXIT	00B7h	0047h	005Fh	0047h	004Fh	005Fh	0097h	Global timing
4027h	[7:0]									
4028h	[7:0]	TLPX	005Fh	0027h	002Fh	0027h	0027h	002Fh	004Fh	Global timing
4029h	[7:0]									
4074h	[2:0]	INCKSEL7	0h	See "INCK Setting".						



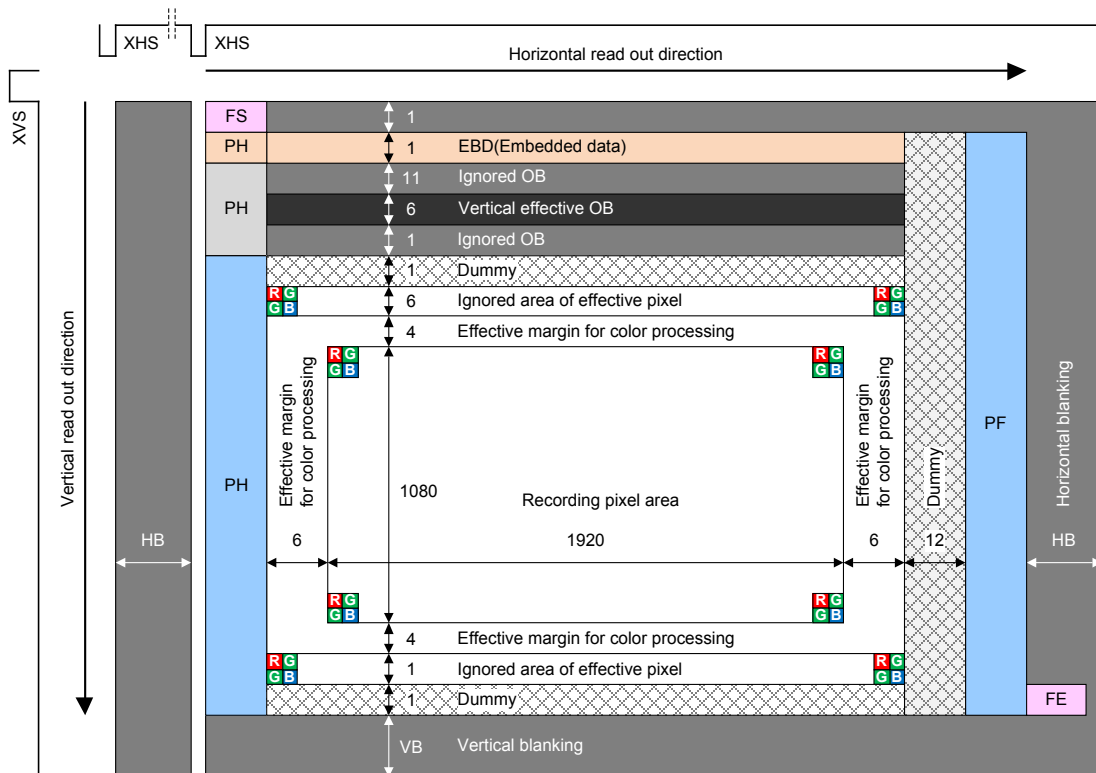

Pixel Array Image Drawing in Horizontal/Vertical 2/2-line binning mode

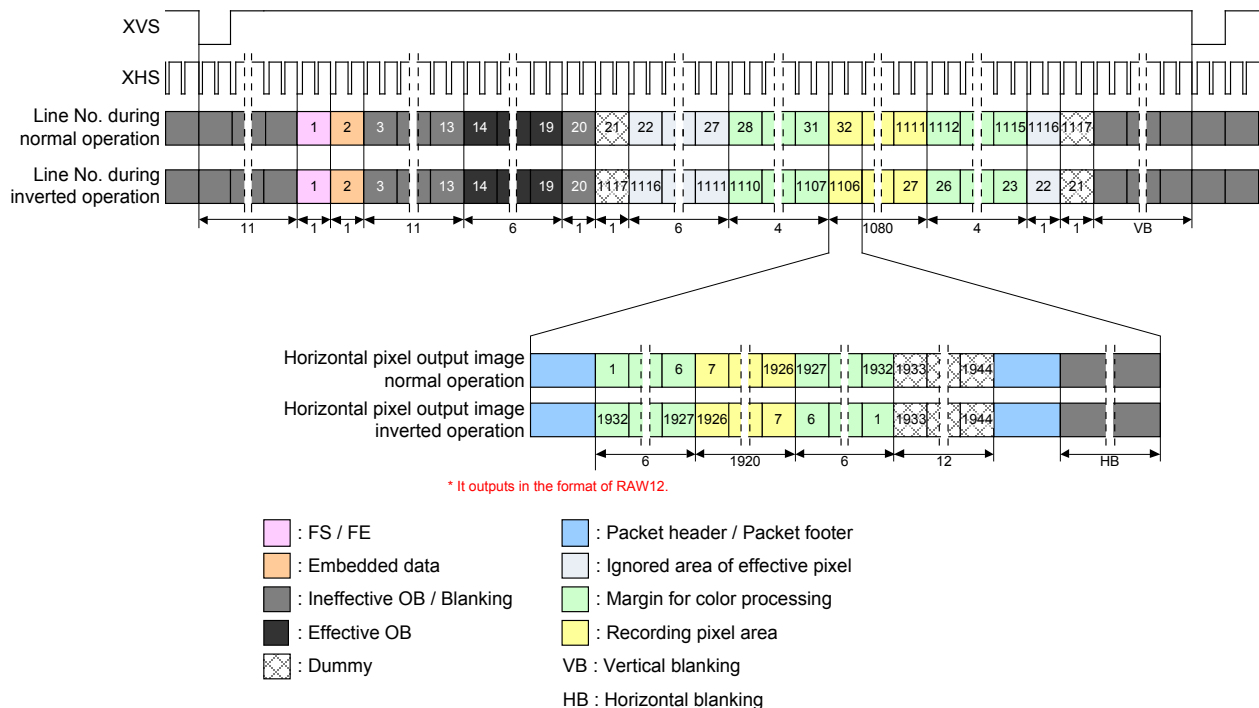

Drive Timing Chart for Horizontal/Vertical 2/2-line binning mode

Pixels that are binned in the inverted operation are pixels that are shifted by one pixel among the same color as compared to pixels that are binned in the normal operation. For example, for consecutive red pixels R1, R2, and R3, R1 and R2 are binned in the normal operation, while R2 and R3 are binned in the inverted operation.

## Window Cropping Mode

In Window Cropping Mode, sensor signals are cropped and read out at an arbitrary position and width. This mode supports Horizontal / Vertical, normal / inverted readout mode for each of All-pixel mode, Horizontal/Vertical 2/2-line binning mode, Multiple exposure HDR and Digital overlap HDR.

The cropping area is designated by the cropping start position and width. The start position of the effective pixels including the dummy becomes the origin (0, 0) for specifying the cropping start position. The cropping start position is specified by the offset from the origin.

For the horizontal period after cropping, use the same value as the horizontal period for the drive mode before cropping. Pixels cropped by horizontal cropping are output left aligned. This extends the horizontal blanking period. Use the cropping position and width fixed. (An invalid frame is output when the cropping position or width is changed.)

Window cropping image is shown in the figure below.

When the setting values of cropping start position and width are the same, the same physical pixel area as All-pixel mode is cropped in Horizontal/Vertical 2/2-line binning mode, Multiple exposure HDR and Digital overlap HDR.

In the inverted mode, the readout operates so that it becomes the same “Recording pixel with Effective margin for color processing (green rectangle in the figure)” area as in the normal mode.

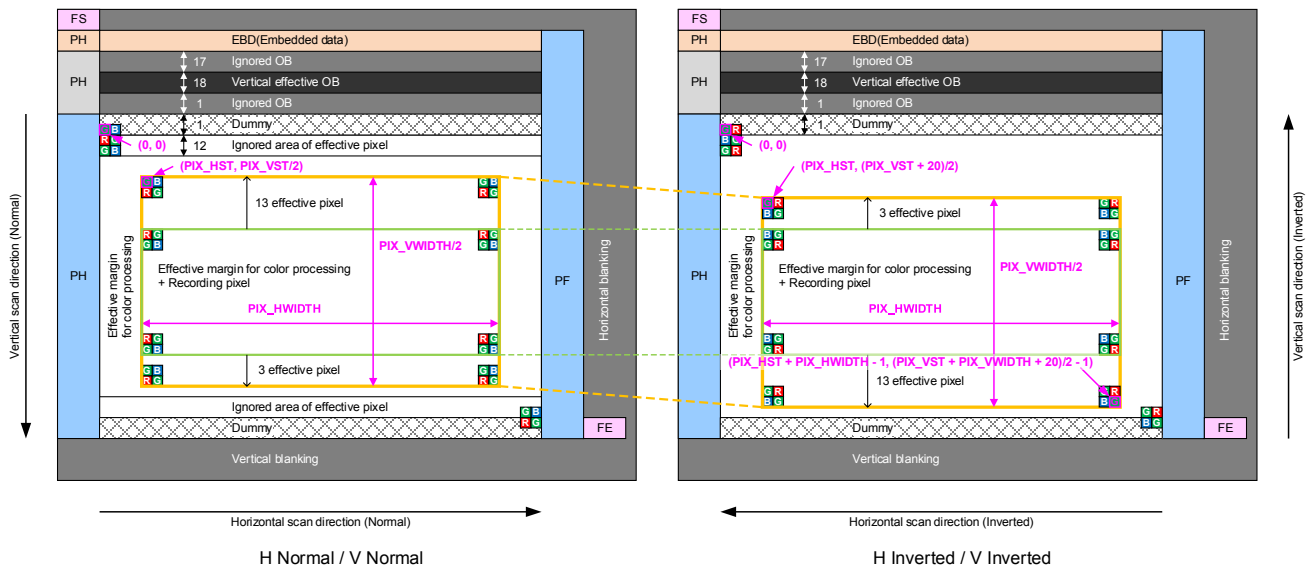


Image Drawing of Window Cropping Mode in Horizontal / Vertical, normal / inverted direction

Supplement) In the inverted mode of the Window cropping mode, the first readout pixel color is “G”.

## List of Setting Register

Register	Register details		Initial value	Setting value	Remarks
	Address	bit			
WINMODE	301Ch	[3:0]	0h	4h: Window cropping mode	
PIX_HST	3040h	[7:0]	0000h	Effective pixel Start position (Horizontal direction)	Set a multiple of 2.
	3041h	[4:0]			
PIX_HWIDTH	3042h	[7:0]	0F18h	Effective pixel Cropping width (Horizontal direction)	Set a multiple of 24.
	3043h	[4:0]			
PIX_VST	3044h	[7:0]	0000h	Effective pixel Start position (Vertical direction) Designated in V units ( Line×2 )	Set a multiple of 4.
	3045h	[4:0]			
PIX_VWIDTH	3046h	[7:0]	1120h	Effective pixel Cropping width (Vertical direction) Designated in V units ( Line×2 )	Set a multiple of 4.
	3047h	[4:0]			

**Restrictions on Window cropping mode**

The register settings must satisfy the following conditions.

## ◆ WINMODE

Set WINMODE to 4h.

## ◆ PIX\_VST, PIX\_VWIDTH

Set PIX\_VST and PIX\_VWIDTH to multiples of 4.

$$\text{PIX\_VST} = n_1 \times 4$$

$$\text{PIX\_VWIDTH} = n_2 \times 4$$

Since the values of PIX\_VST and PIX\_VWIDTH are in units of internal V addresses, set PIX\_VST and PIX\_VWIDTH to twice the desired cropping start position and cropping width.

The range specified by PIX\_VST and PIX\_VWIDTH must include an extra 13 effective pixels in the front and 3 effective pixels in the rear in addition to the “Recording pixels with Effective margin for color processing” that you want to crop.

## ◆ PIX\_HST, PIX\_HWIDTH

Set PIX\_HST to a multiple of 2.

Set PIX\_HWIDTH to a multiple of 24.

$$\text{PIX\_HST} = n_3 \times 2$$

$$\text{PIX\_HWIDTH} = n_4 \times 24$$

Where  $n_1$  to  $n_4$  are integers greater than or equal to 0.

## ◆ VTTL

$$V_{TTL} \text{ (length of one frame in line units or VMAX)} \geq (\text{PIX\_VWIDTH} / 2) + 46$$

Set VTTL to 1222 or higher.

$$V_{TTL} \geq 1222$$

## ◆ Frame rate on Window cropping mode

$$\text{Frame rate [frame/s]} = 1 / (V_{TTL} \times (1H \text{ period}))$$

1H period (set in units [s]) : Set “1H period” or more of the mode before cropping in the “Operating mode” table.

Description of Various Functions

Standby Mode


This sensor stops its operation and goes into standby mode which reduces power consumption by writing “1” to the standby control register STANDBY. Standby mode is also established after power-on or other system reset operation.

List of Standby Mode Setting

Register	Register details		Initial value	Setting value	Remarks
	Address	bit			
STANDBY	3000h	[0]	1h	1h: Standby 0h: Operating	Register communication is possible even during standby.

The values of serial communication registers are retained even in standby mode, and the register values can be overwritten by serial communication. Therefore, standby mode can be canceled by setting the STANDBY register to “0”. After standby mode is canceled, it takes 24 ms for the internal regulator stabilization. After that, the frame output starts. Normal frames are output from the 9th frame.

For a detailed sequence of setting and canceling standby mode, see section “Sensor Setting Flow”.

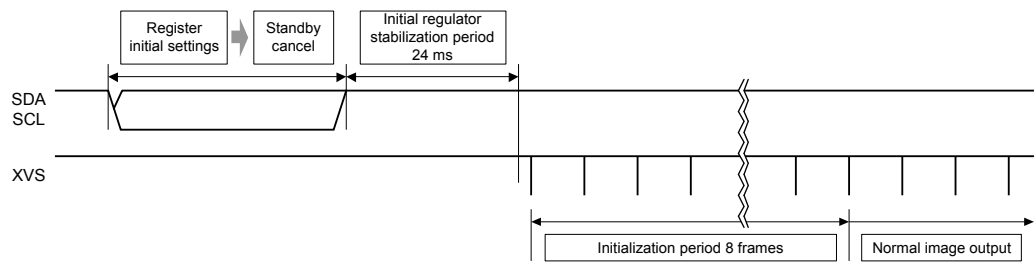

Sequence from Standby Cancel to Stable Image Output

## Slave Mode and Master Mode

The sensor can be switched between slave mode and master mode. The switching is made by the XMASTER register. Establish the XMASTER status before canceling standby mode. (Do not switch this register status during operation.)

When the sensor is in slave mode, input the vertical sync signal to the XVS pin and the horizontal sync signal to the XHS pin. The vertical sync signal interval should be equal to the number of lines per frame, and the horizontal sync signal interval should be 1H period determined for each operating mode. See the section of "Readout Drive mode" for the number of lines per frame and 1H period.


After setting the master mode, set the register XMSTA to 0h to start the operation. In the master mode, the interval of the vertical sync signal to be generated is set in the VMAX [19:0] register in line units, and the interval of the horizontal sync signal is set in the HMAX [15:0] register in clock units. See the section of "Readout Drive mode" for details on setting each operating mode.

### List of Slave and Master Mode Setting

Register	Register details		Initial value	Setting value	Remarks
	Address	bit			
XMASTER	3003h	[0]	0h	0h: Master mode 1h: Slave mode	

### List of Register in Master Mode

Register	Register details		Initial value	Setting value	Remarks
	Address	bit			
XMSTA	3002h	[0]	1h	1h: Master operation ready 0h: Master operation start	The master operation starts by setting 0.
VMAX [19:0]	3024h	[7:0]	008CAh	See the item of each drive mode.	Number of lines per frame designated.
	3025h	[7:0]			
	3026h	[3:0]			
HMAX [15:0]	3028h	[7:0]	0226h	See the item of each drive mode.	Number of clocks per line designated.
	3029h	[7:0]			
XVSOUTSEL [1:0]	30C0h	[1:0]	2h	0h: Fixed to Low 2h: VSYNC output	
XHSOUTSEL [1:0]		[3:2]	2h	0h: Fixed to Low 2h: HSYNC output	
XVS_DRV [1:0]	30C1h	[1:0]	3h	0h: XVS output (Master mode) 3h: Hi-z (Slave mode)	
XHS_DRV [1:0]		[3:2]	3h	0h: XHS output (Master mode) 3h: Hi-z (Slave mode)	
XVSLNG [1:0]	30CCh	[5:4]	0h	0h: 1H, 1h: 2H, 2h: 4H, 3h: 8H	XVS low level pulse width designated.
XHSLNG [1:0]	30CDh	[5:4]	0h	0h: 16clock, 1h: 32clock 2h: 64clock, 3h: 128clock See the next.	XHS low level pulse width designated.

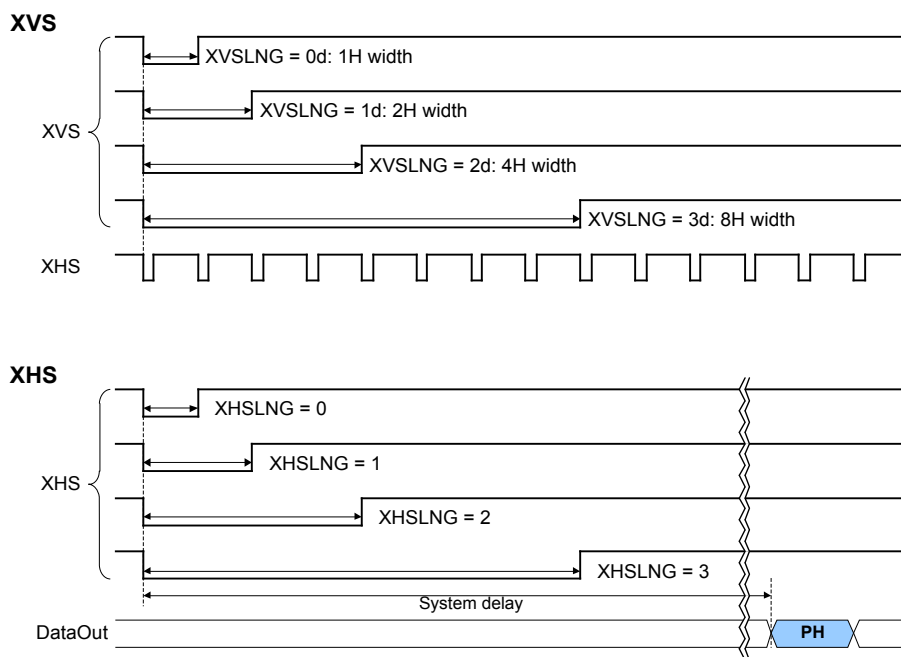

XVS and XHS output waveforms in sensor master mode

XVS and XHS are output when the register XMSTA is set to 0. If XMSTA is set to 0 during standby, XVS and XHS are output just after canceling standby. The XVS and XHS are output asynchronous with other input or output signals. In addition, the output signals are output with an undefined latency time (system delay) relative to the XHS. Therefore, refer to the sync codes output from the sensor and perform synchronization.

## Gain Adjustment Function


The Programmable Gain Control (PGC) of this sensor consists of an analog part and a digital part. By setting the register GAIN\_PGC\_0 [8:0], it is possible to set a maximum of 72 dB in total of analog gain and digital gain. The setting is common to all colors.

Set the register to a value that is 10/3 times the desired gain value. (0.3 dB step)

Example)

When set to 6 dB:  $6 \times 10/3 = 20d$ ; GAIN\_PGC\_0 = 14h


When set to 12.6 dB:  $12.6 \times 10/3 = 42d$ ; GAIN\_PGC\_0 = 2Ah

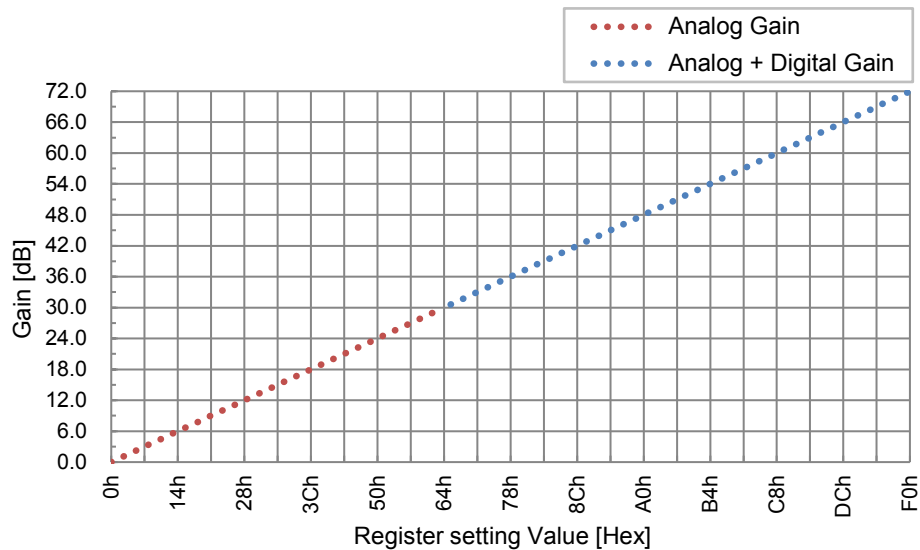

### List of PGC Register

Register	Register details		Initial value	Setting value	Remarks
	Address	bit		Setting range	
GAIN_PGC_0 [8:0]	3090h	[7:0]	000h	00h-F0h (0d-240d)	Setting value: Gain [dB] × 10/3 (0.3 dB step)
	3091h	[0]			

As shown below, the gain setting is reflected in the frame that is delayed by one frame from the communication.

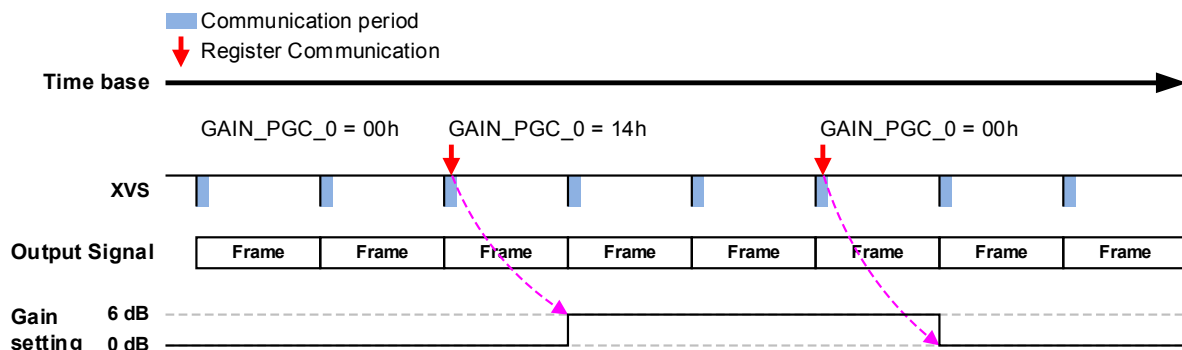

Gain Reflection Timing

## Black Level Adjustment Function

The black level offset (offset variable range: 000h to 3FFh) can be added to the data for which the digital gain modulation has been performed by the BLKLEVEL [9:0] register.

Note that the offset unit changes according to the output bit setting.

When the output data length is 10-bit output, increasing the register setting value by 1h increases the black level by 1 LSB. When the output data length is 12-bit output, increasing the register setting value by 1h increases the black level by 4 LSB.

\* Recommended setting

10-bit output: 032h (50d in LSB units)

12-bit output: 032h (200d in LSB units)

### List of Black Level Adjustment Register

Register	Register details		Initial value	Setting value
	Address	bit		
BLKLEVEL [9:0]	30E2h	[7:0]	032h	000h to 3FFh
	30E3h	[1:0]		





## Normal Operation and Inverted Operation

The sensor readout direction (normal / inverted) in vertical direction can be switched by VREVERSE register and in horizontal direction can be switched by HREVERSE register. See the section of “Image Data Output Format” for the order of readout lines in normal and inverted modes, and for other register settings.

If the vertical readout direction is switched during streaming, one invalid frame occurs, while regarding the horizontal readout direction switching, no invalid frame occurs.

### List of Drive Direction Setting Register

Register	Register details		Initial value	Setting value
	Address	bit		
HREVERSE	3030h	[0]	0h	0h: Normal 1h: Inverted
VREVERSE		[1]	0h	0h: Normal 1h: Inverted

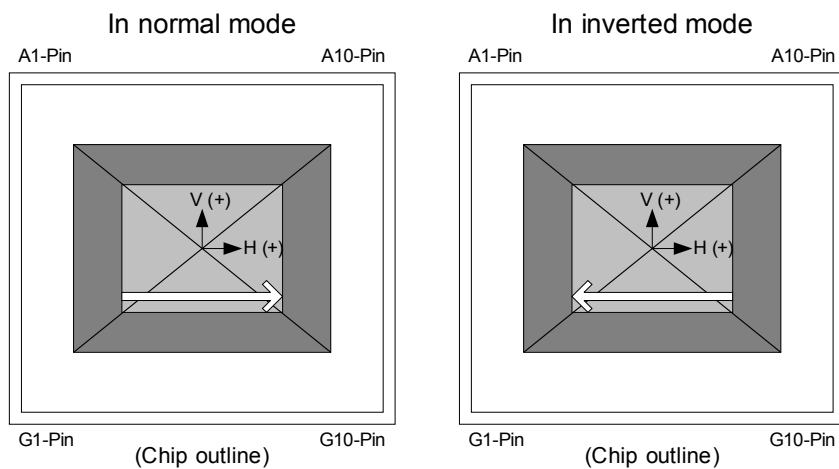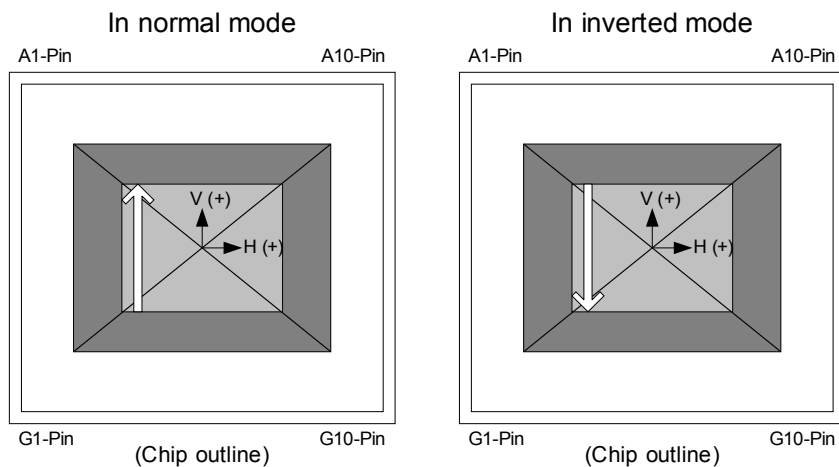

## Shutter and Integration Time Settings

This sensor has a variable electronic shutter function that can control the integration time in line units. In addition, this sensor performs rolling shutter operation in which electronic shutter and readout operation are performed sequentially for each line.

Note) The frame that reflects the change in the integration time is output with a delay of one frame from the change.

### Example of Integration Time Setting

The sensor's integration time is obtained by the following formula.

$$\text{Integration time} = 1 \text{ frame period} - \text{SHR0} \times (1\text{H period}) + T_{\text{offset}}$$

Where  $T_{\text{offset}}$  is 1.79 [μs] in AD 10bit mode and 2.68 [μs] in AD 12bit mode.

- \*1 The frame period is determined by the input XVS when the sensor is operating in slave mode and by the register VMAX when the sensor is in master mode. Since the frame period is designated in 1H units, it can be converted into time units using the formula (Number of lines × 1H period).
- \*2 See the section of "Readout Drive mode" for the 1H period.

In this section, the shutter operation and integration time are shown as in the figure below with the time sequence on the horizontal axis and the vertical addresses on the vertical axis. For simplicity, shutter and readout operations are noted in line units.

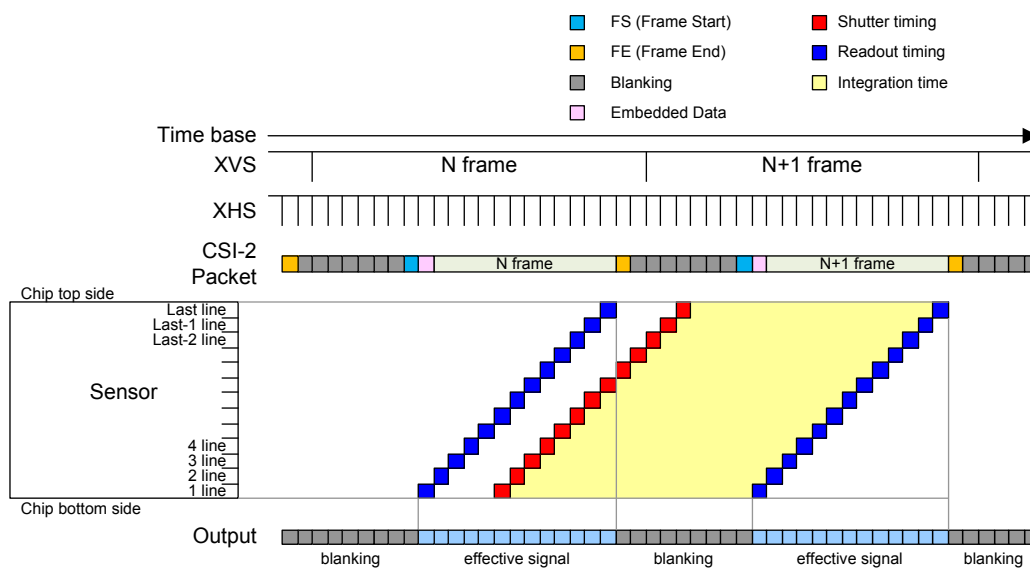


Image Drawing of Shutter Operation

### Normal Exposure Operation (Controlling the Integration Time in 1H Units)

The integration time can be controlled by changing the electronic shutter timing. In the electronic shutter settings, the integration time is controlled by the SHR0 [19:0] register. Set SHR0 [19:0] to a value between 8 and (Number of lines per frame - 4). When the sensor is operating in slave mode, the number of lines per frame is determined by the XVS interval (number of lines), with the input XHS interval being one line unit. When the sensor is operating in master mode, the number of lines per frame is determined by the VMAX [19:0] register. The number of lines per frame differs according to the operating mode.

#### Registers Used to Set the Integration Time in 1H Units

Register	Register details		Initial value	Setting value
	Address	bit		
SHR0 [19:0]	3050h	[7:0]	00066h	Shutter sweep time. 8 to (Number of lines per frame - 4). * Others: Setting prohibited.
	3051h	[7:0]		
	3052h	[3:0]		
VMAX [19:0]	3024h	[7:0]	008CAh	Number of lines per frame (only in master mode). See section "Readout Drive mode" for the setting value of each mode.
	3025h	[7:0]		
	3026h	[3:0]		

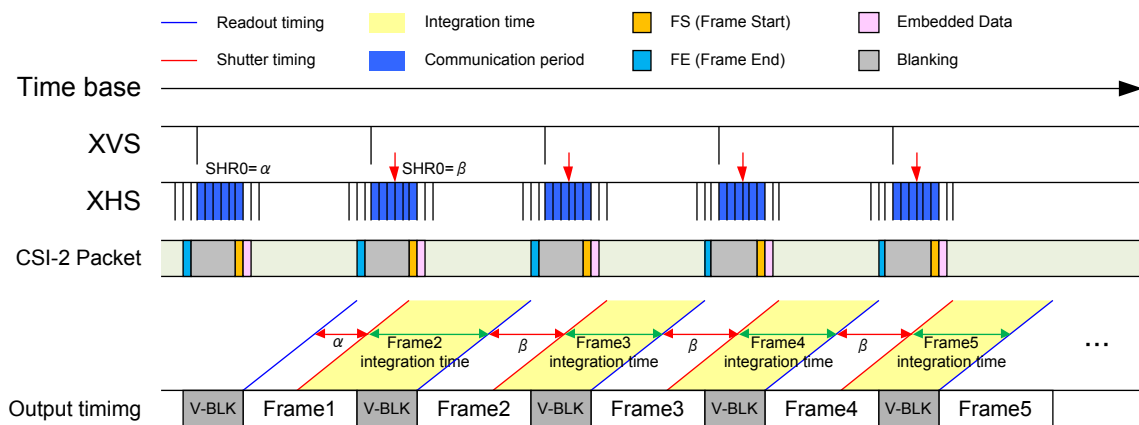


Image Drawing of Integration Time Control within a Frame

### Long Exposure Operation (Controlled by Expanding the Number of Lines per Frame)

Long exposure operation can be performed by lengthening the frame period.

When the sensor is operating in slave mode, this is done by lengthening the input vertical sync signal (XVS) pulse interval.

When the sensor is operating in master mode, this is done by setting register VMAX [19:0] to a value greater than in normal operation. When the integration time is extended by increasing the number of lines, the rear V blanking increases by an equivalent amount.

The maximum exposure time in long exposure operation varies depending on the mode, but it is approximately 1 s. If a value that exceeds the number of V lines for each operating mode described in the “Readout Drive mode” section is set, the imaging characteristics are not guaranteed during long exposure operation.

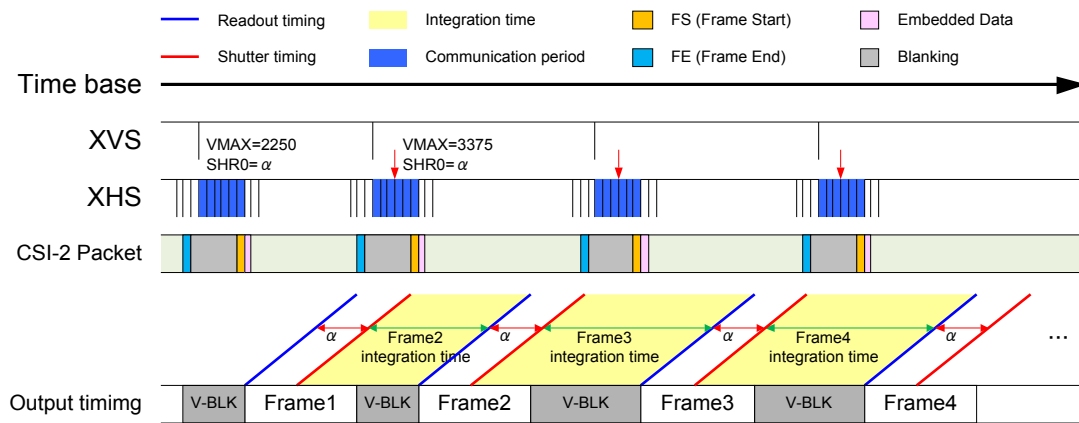


Image Drawing of Long Integration Time Control by Adjusting the Frame Period

### Example of Integration Time Settings

The example of register settings for controlling the integration time is shown below.

#### Example of Integration Time Settings

Operation	Sensor setting (register)		Integration time
	VMAX*	SHR0**	
All-pixel scan mode	2250	2246	4H + T <sub>offset</sub>
		⋮	⋮
		N	(2250 - N) H + T <sub>offset</sub>
		⋮	⋮
		8	2242H + T <sub>offset</sub>

Where T<sub>offset</sub> is 1.79 [μs] in AD 10bit mode and 2.68 [μs] in AD 12bit mode.

\* VMAX is effective only in master mode. In slave mode, XVS input interval is used instead of VMAX.

\*\* The range of SHR0 (N) is "8" to "VMAX (M) - 4".

## CSI-2 Output

The sensor supports the following output modes and output formats.

CSI-2 serial 2 Lane / 4 Lane, RAW10 / RAW12

The following describes the 2 Lane / 4 Lane serial signal output method of this sensor.

The image data of this sensor is output according to the CSI-2 interface. There is a total of 4 pairs of pins for the CSI-2 data signal output. The name of each pair is as follows. The DMO1P / DMO1N pair is called "Lane1". The DMO2P / DMO2N pair is called "Lane2". The DMO3P / DMO3N pair is called "Lane3". And the DMO4P / DMO4N pair is called "Lane4". In addition, the CSI-2 clock signal is output from the DCKP / DCKN pair. This pair is called "Clock Lane".

In 2 Lane mode, data is output from Lane1 and Lane2. In 4 Lane mode, data is output from Lane1, Lane2, Lane3 and Lane4.

The maximum bit rate is 1485 Mbps/Lane in 4 Lane mode and 1440 Mbps/Lane in 2 Lane mode.

RAW10 / RAW12 is selectable by register MDBIT [0]. The number of data lanes used is set by register LANEMODE [2:0].


Unused lanes output according to the MIPI standard.

Register	Register details		Initial value	Setting value
	Address	bit		
MDBIT	3032h	[0]	1h	0h: RAW10 1h: RAW12
LANEMODE [2:0]	4001h	[2:0]	3h	1h: 2 Lane 3h: 4 Lane


The formats of RAW12 and RAW10 are shown below.



→ RAW12 Format




→ RAW10 Format




RAW12 / RAW10 Format Example

The output formats of 2 Lane and 4 Lane are shown below.

a) 2 Lane-RAW12

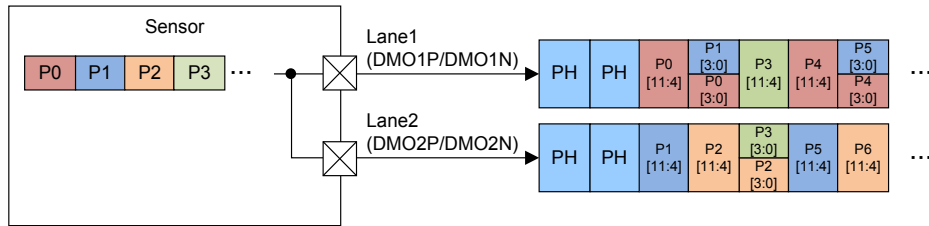


b) 2 Lane-RAW10

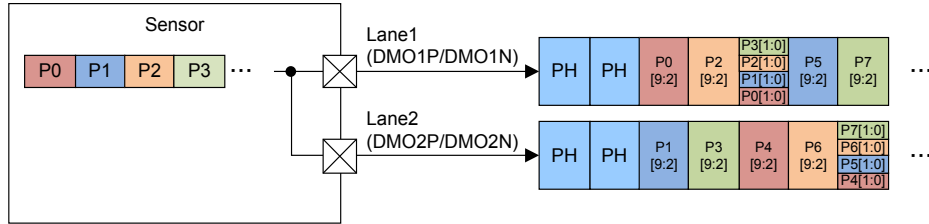


2 Lane Output Format

c) 4 Lane-RAW12

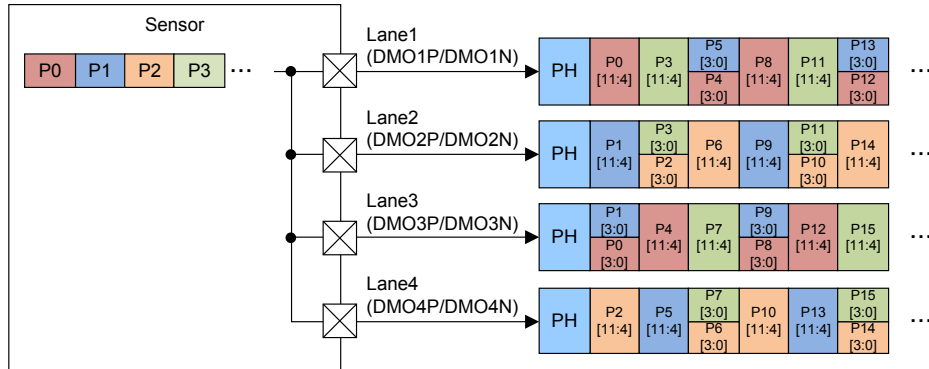


d) 4 Lane-RAW10

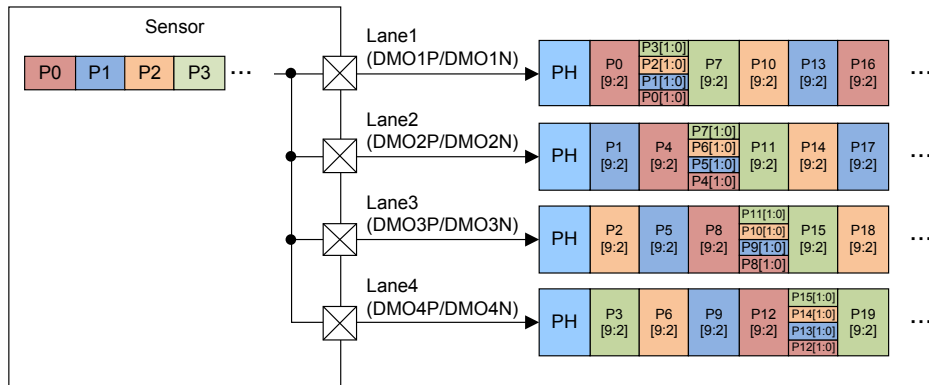

4 Lane Output Format

## MIPI Transmitter

The CSI-2 output pins (DMO1P, DMO1N, DMO2P, DMO2N, DMO3P, DMO3N, DMO4P, DMO4N, DCKP, DCKN) are described in this section.

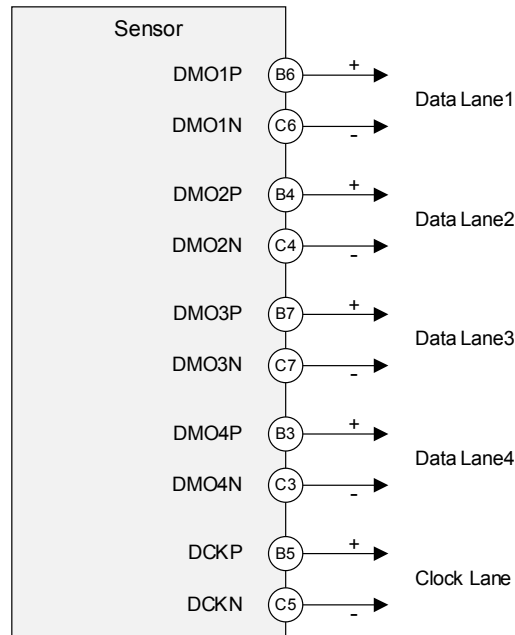


Relationship between Pin Name and MIPI Output Lane

The pixel signals are output by the CSI-2 High-speed serial interface.

Refer to the MIPI Standard:

- MIPI Alliance Standard for Camera Serial Interface 2 (CSI-2) Version 1.2
- MIPI Alliance Specification for D-PHY Version 1.2

The CSI-2 transfers one bit with a pair of differential signals. The transmitter outputs differential current signal after converting pixel signals to it. Insert external resistance in differential pair in a series or use cells with a built-in resistance on the Receiver side. When inserting an external resistor, place it as close as possible to the Receiver. To avoid malfunction, the spacing between signal lines of a differential pair shall be kept constant, the wiring length difference between signal lines of a differential pair shall be minimum, and usage of meander wiring shall be kept to a minimum. The maximum bit rate of each Lane is 1485 Mbps/Lane.

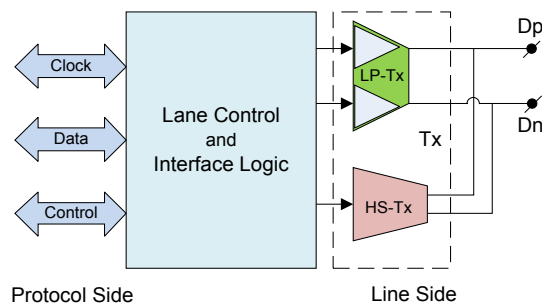

Universal Lane Module Functions



### Internal A/D Conversion Bit Width Setting

The internal A/D conversion bit width can be set to 10-bit or 12-bit by the register ADBIT [1:0]. Depending on the operating mode, the output is limited to 10-bit only. See the section of “Readout Drive mode” for the bit width supported by each mode.

#### List of Bit Width Selection

Register	Register details		Initial value	Setting value
	Address	bit		
ADBIT	3031h	[1:0]	1h	0h: 10-bit 1h: 12-bit

### Output Signal Range

In CSI-2 output mode, the sensor output has either a 10-bit or 12-bit gradation, and the maximum output value is 3FFh for 10-bit output and FFFh for 12-bit output.

The output range for each output gradation is shown in the table below.

#### Output Gradation and Output Range (CSI-2 output)

Output gradation	Output value	
	Min.	Max.
10-bit	000h	3FFh
12-bit	000h	FFFh

## INCK Setting

The available operation mode varies according to INCK frequency. Input 24 MHz, 27 MHz, 37.125 MHz, 72 MHz or 74.25 MHz for INCK frequency. The INCK setting registers and the list of INCK settings are shown in the table below.

In the MIPI Alliance Specification for D-PHY Version 1.2, when operating above 1500 Mbps, an initial deskew sequence shall be transmitted before High-Speed Data Transmission. When operating at or below 1500 Mbps, the transmission of the initial deskew sequence is optional. When operating at or above 1440 Mbps, this sensor transmits the initial deskew burst.

### INCK Setting Register

Data rate: 1485 Mbps/lane

Register	Register details		Initial value	INCK		
	Address	bit		27 [MHz]	37.125 [MHz]	74.25 [MHz]
BCWAIT_TIME	3009-08h	[9:0]	0FFh	05Dh	07Fh	0FFh
CPWAIT_TIME	300B-0Ah	[9:0]	0B6h	042h	05Bh	0B6h
SYS_MODE	3033h	[3:0]	4h	8h	8h	8h
INCKSEL1	3115h	[7:0]	00h	00h	00h	00h
INCKSEL2	3116h	[7:0]	28h	23h	24h	28h
INCKSEL3	3119-18h	[10:0]	0C0h	0A5h	0A0	0A0h
INCKSEL4	311B-1Ah	[10:0]	0E0h	0E7h	0E0h	0E0h
INCKSEL5	311Eh	[7:0]	28h	23h	24h	28h
TXCLKESC_FREQ	4005-04h	[15:0]	1290h	06C0h	0948h	1290h
INCKSEL6	400Ch	[0]	1h	1h	1h	1h
INCKSEL7	4074h	[2:0]	0h	0h	0h	0h

Data rate: 1440 Mbps/lane

Register	Register details		Initial value	INCK	
	Address	bit		24 [MHz]	72 [MHz]
BCWAIT_TIME	3009-08h	[9:0]	0FFh	054h	0F8h
CPWAIT_TIME	300B-0Ah	[9:0]	0B6h	03Bh	0B0h
SYS_MODE	3033h	[3:0]	4h	8h	8h
INCKSEL1	3115h	[7:0]	00h	00h	00h
INCKSEL2	3116h	[7:0]	28h	23h	28h
INCKSEL3	3119-18h	[10:0]	0C0h	0B4h	0A0h
INCKSEL4	311B-1Ah	[10:0]	0E0h	0FCh	0E0h
INCKSEL5	311Eh	[7:0]	28h	23h	28h
TXCLKESC_FREQ	4005-04h	[15:0]	1290h	0600h	1200h
INCKSEL6	400Ch	[0]	1h	1h	1h
INCKSEL7	4074h	[2:0]	0h	0h	0h

Data rate: 891 Mbps/lane

Register	Register details		Initial value	INCK		
	Address	bit		27 [MHz]	37.125 [MHz]	74.25 [MHz]
BCWAIT_TIME	3009-08h	[9:0]	0FFh	05Dh	07Fh	0FFh
CPWAIT_TIME	300B-0Ah	[9:0]	0B6h	042h	05Bh	0B6h
SYS_MODE	3033h	[3:0]	4h	5h	5h	5h
INCKSEL1	3115h	[7:0]	00h	00h	00h	00h
INCKSEL2	3116h	[7:0]	28h	23h	24h	28h
INCKSEL3	3119-18h	[10:0]	0C0h	0C6h	0C0h	0C0h
INCKSEL4	311B-1Ah	[10:0]	0E0h	0E7h	0E0h	0E0h
INCKSEL5	311Eh	[7:0]	28h	23h	24h	28h
TXCLKESC_FREQ	4005-04h	[15:0]	1290h	06C0h	0948h	1290h
INCKSEL6	400Ch	[0]	1h	0h	0h	0h
INCKSEL7	4074h	[2:0]	0h	1h	1h	1h

Data rate: 720 Mbps/lane

Register	Register details		Initial value	INCK	
	Address	bit		24 [MHz]	72 [MHz]
BCWAIT_TIME	3009-08h	[9:0]	0FFh	054h	0F8h
CPWAIT_TIME	300B-0Ah	[9:0]	0B6h	03Bh	0B0h
SYS_MODE	3033h	[3:0]	4h	9h	9h
INCKSEL1	3115h	[7:0]	00h	00h	00h
INCKSEL2	3116h	[7:0]	28h	23h	28h
INCKSEL3	3119-18h	[10:0]	0C0h	0B4h	0A0h
INCKSEL4	311B-1Ah	[10:0]	0E0h	0FCh	0E0h
INCKSEL5	311Eh	[7:0]	28h	23h	28h
TXCLKESC_FREQ	4005-04h	[15:0]	1290h	0600h	1200h
INCKSEL6	400Ch	[0]	1h	0h	0h
INCKSEL7	4074h	[2:0]	0h	1h	1h

Data rate: 594 Mbps/lane


Register	Register details		Initial value	INCK		
	Address	bit		27 [MHz]	37.125 [MHz]	74.25 [MHz]
BCWAIT_TIME	3009-08h	[9:0]	0FFh	05Dh	07Fh	0FFh
CPWAIT_TIME	300B-0Ah	[9:0]	0B6h	042h	05Bh	0B6h
SYS_MODE	3033h	[3:0]	4h	7h	7h	7h
INCKSEL1	3115h	[7:0]	00h	00h	00h	00h
INCKSEL2	3116h	[7:0]	28h	23h	24h	28h
INCKSEL3	3119-18h	[10:0]	0C0h	084h	080h	080h
INCKSEL4	311B-1Ah	[10:0]	0E0h	0E7h	0E0h	0E0h
INCKSEL5	311Eh	[7:0]	28h	23h	24h	28h
TXCLKESC_FREQ	4005-04h	[15:0]	1290h	06C0h	0948h	1290h
INCKSEL6	400Ch	[0]	1h	0h	0h	0h
INCKSEL7	4074h	[2:0]	0h	1h	1h	1h

## Register Hold Setting

By using the register REGHOLD, the settings of the frame reflection registers (registers whose reflection timing is “V” in the Register Map) can be transmitted in several frames and reflected in a certain frame at once. Registers set while REGHOLD is 1 are not reflected at the “Frame reflection register reflection timing”. By setting REGHOLD to 0 in the frame where you want to reflect the registers, the registers set while REGHOLD is 1 are reflected at once.

### Register Hold Setting Register

Register	Register details		Initial value	Setting value
	Address	bit		
REGHOLD	3001h	[0]	0h	0: Invalid 1: Valid (Register hold)

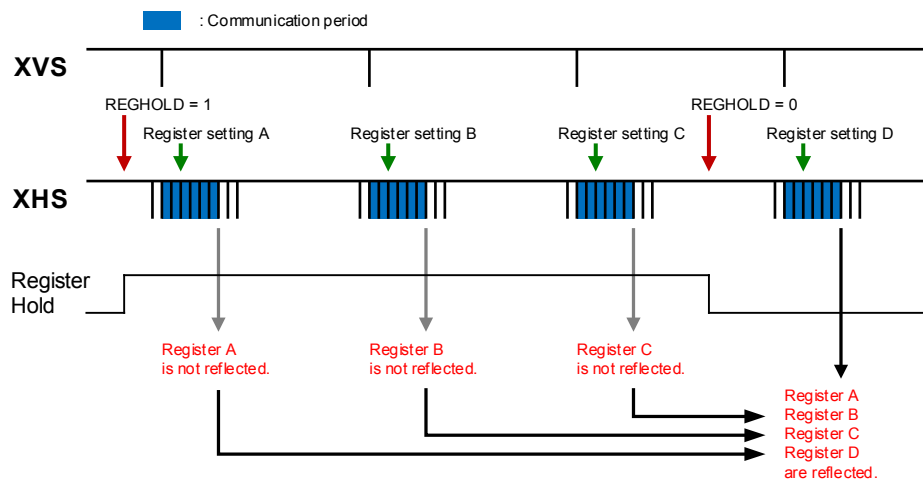

### Register Hold Setting

## Mode Transitions

The transitions between operation modes are shown below. These examples are when setting is completed in one communication period.

List of Mode Transition

Transition			State
Horizontal direction normal	→	Horizontal direction inverted	Via the Standby state is unnecessary.
Horizontal direction inverted	→	Horizontal direction normal	
All-pixel scan mode	→	Window cropping mode	Via the Standby state is unnecessary. One invalid frame is generated.
Window cropping mode	→	All-pixel scan mode	
Vertical direction normal	→	Vertical direction inverted	
Vertical direction inverted	→	Vertical direction normal	
Vertical direction the number of lines change (Master mode: VMAX change, Slave mode: XVS interval change)			
Horizontal direction 1H period change (Master mode: HMAX change, Slave mode: XHS interval change)			
- Transition between modes other than the above - Change the input frequency of INCK *1 - Change the register setting noted “S” in the reflection timing column of the Register Map.			Via the standby state is necessary.

<sup>\*1</sup> When changing the input INCK frequency, be careful not to input a pulse shorter than the high / low level widths of the preceding and following INCK at the frequency switching. If the above pulse may occur at the INCK switching point, set the XCLR pin to Low level and change the INCK frequency during system reset. Then, set the XCLR pin to High level and perform system clear following the "Power-on sequence" in the section of "Power-on and Power-off Sequence". Execute initial setting again because the register settings become default state after system clear.

**Other Functions**


This sensor has the following functions. For details, refer to each application note.

- Digital overlap HDR (2 / 3 frame)
- Multiple exposure HDR (2 / 4 frame)
- Additional Function of Synchronizing Sensors

## Power-on and Power-off Sequence

### Power-on sequence

1. Turn on the power supplies so that the power supplies rise in order of 1.1 V power supply (DV<sub>DD</sub>) → 1.8 V power supply (OV<sub>DD</sub>) → 2.9 V power supply (AV<sub>DD</sub>). In addition, all the power supplies should finish rising within 200 ms.
2. The register values are undefined immediately after power-on, so the system must be cleared. Hold XCLR at Low level for 500 ns or more after all the power supplies have finished rising. (The register values after a system clear are the default values.)
3. The system clear is applied by setting XCLR to High level. Input the master clock after setting the XCLR pin to High level.
4. Make the sensor setting by register communication after the system clear.

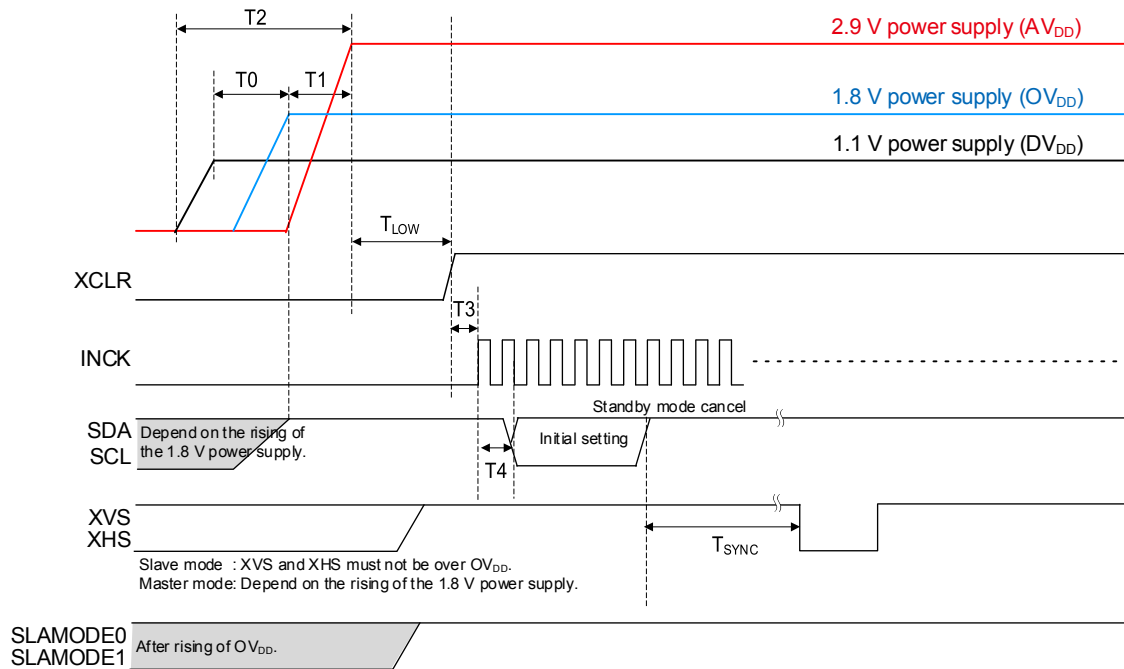


### Power-on Sequence

Item	Symbol	Min.	Max.	Unit
1.1 V power supply rising → 1.8 V power supply rising	T <sub>0</sub>	0	—	ns
1.8 V power supply rising → 2.9 V power supply rising	T <sub>1</sub>	0	—	ns
Rising time of all power supplies	T <sub>2</sub>	—	200	ms
2.9 V power supply rising → Clear OFF	T <sub>LOW</sub>	500	—	ns
Clear OFF → INCK rising	T <sub>3</sub>	1	—	μs
Clear OFF → Communication start	T <sub>4</sub>	20	—	μs
Standby OFF (communication) → External input XHS, XVS (slave mode only)	T <sub>SYNC</sub>	24	—	ms

Slew Rate Limitation of Power-on Sequence

Conform the slew rate limitation shown below while a power supply ramps up from 0 V to 100 % of its voltage in the power-on sequence.

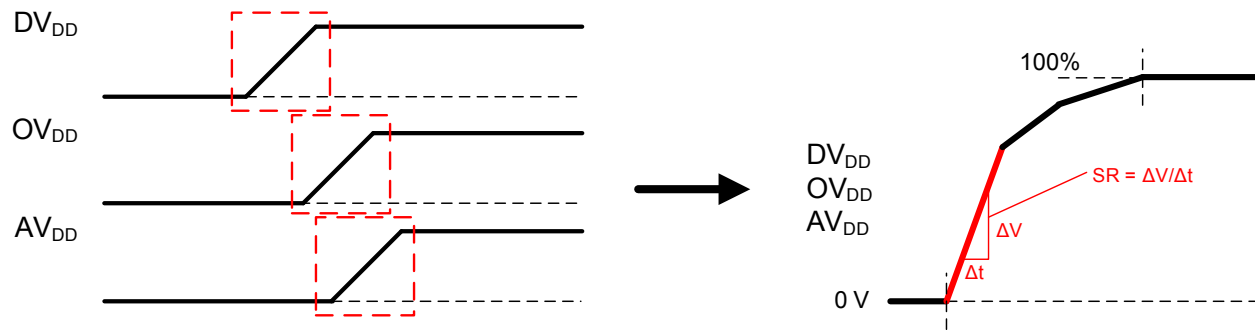


Item	Symbol	Power supply	Min.	Max.	Unit	Remarks
Slew rate	SR	DV <sub>DD</sub> (1.1 V)	—	25	mV/μs	
		OV <sub>DD</sub> (1.8 V)	—	25	mV/μs	
		AV <sub>DD</sub> (2.9 V)	—	25	mV/μs	



Power-off sequence

Turn off the power supplies so that the power supplies fall in order of 2.9 V power supply (AV<sub>DD</sub>) → 1.8 V power supply (OV<sub>DD</sub>) → 1.1 V power supply (DV<sub>DD</sub>). In addition, all power supplies should finish falling within 200 ms. Set each digital input pin (INCK, SDA, SCL, XCLR, XVS, XHS) to 0 V before the 1.8 V power supply (OV<sub>DD</sub>) falls.

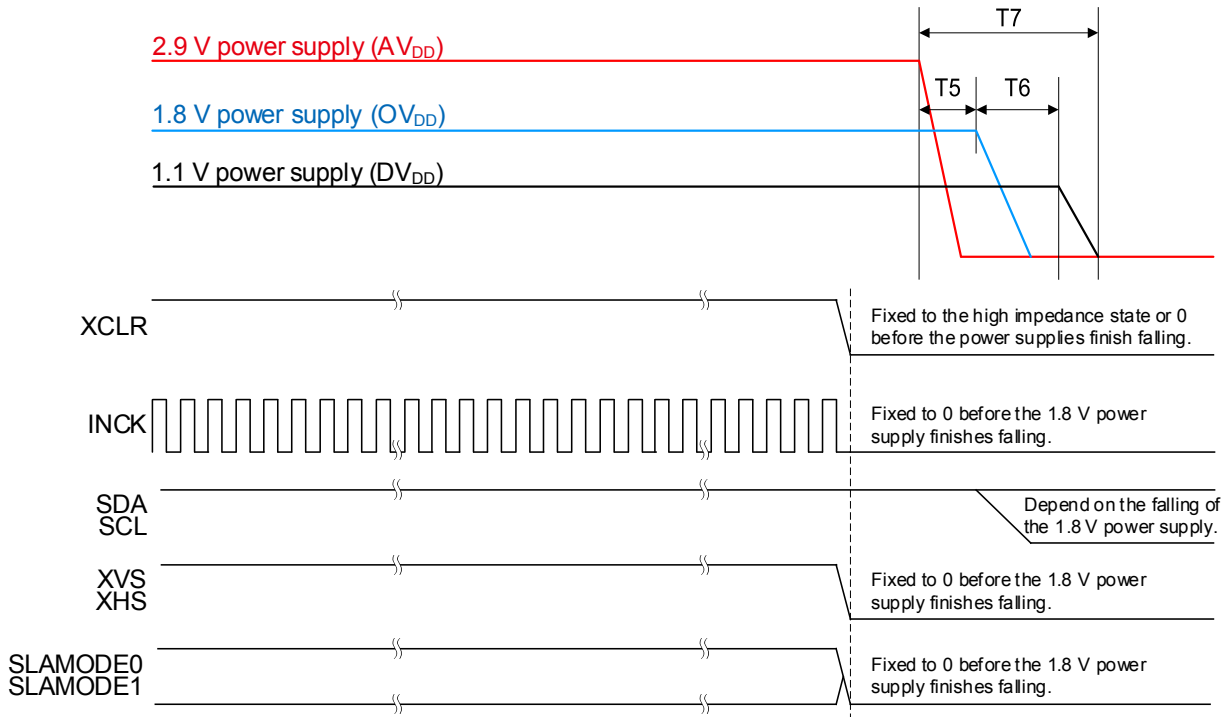


Power-off Sequence

Item	Symbol	Min.	Max.	Unit
2.9 V power shut down → 1.8 V power shut down	T5	0	—	ns
1.8 V power shut down → 1.1 V power shut down	T6	0	—	ns
Shut down time of all power supplies	T7	—	200	ms

Sensor Setting Flow

Setting Flow in Sensor Slave Mode

The figure below shows operating flow in sensor slave mode.  
For details from “Power-on” to “System clear”, see the item of “Power-on sequence” in this section.  
For details from “Standby cancel” to “Wait for image stabilization”, see the item of “Standby Mode”.  
“Standby setting (power save mode)” can be made by setting the STANDBY register to “1” during “Operation”.

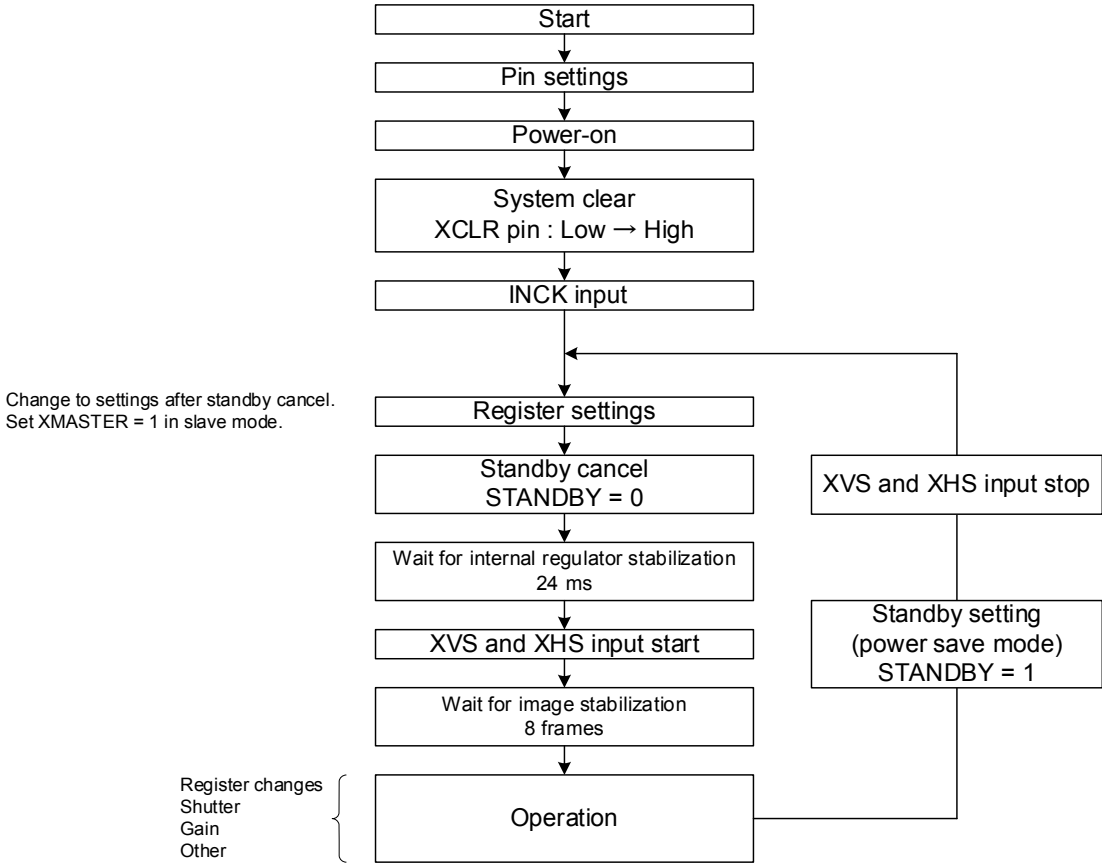

Sensor Setting Flow (Sensor Slave Mode)

### Setting Flow in Sensor Master Mode

The figure below shows operating flow in sensor master mode.


For details from “Power-on” to “System clear”, see the item of “Power-on sequence” in this section.

For details from “Standby cancel” to “Wait for image stabilization”, see the item of “Standby Mode”.

In master mode, “Master mode starts” by setting register XMSTA to “0” after “Waiting for internal regulator stabilization”.

“Standby setting (power save mode)” can be made by setting the STANDBY register to “1” during “Operation”.

At this time, set “Master mode stop” by setting XMSTA to “1”.

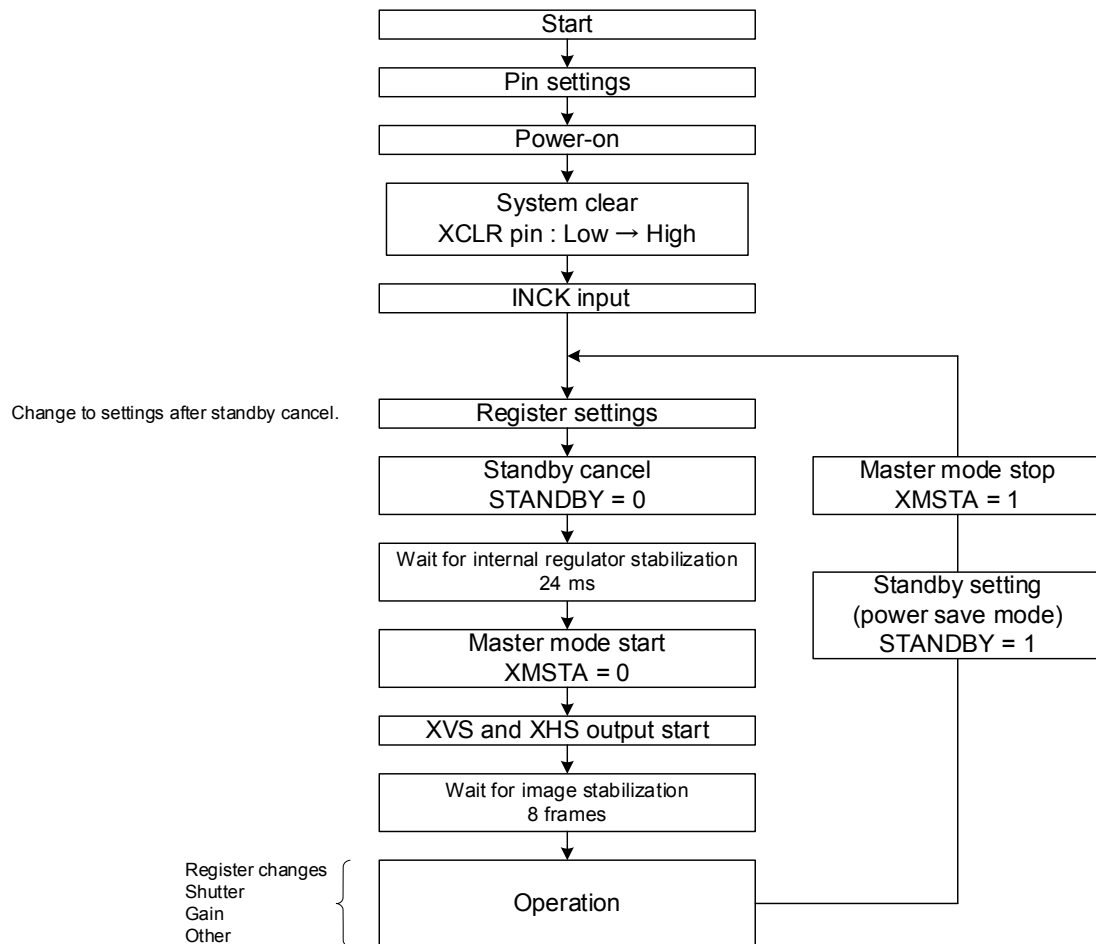

Sensor Setting Flow (Sensor Master Mode)

The diagram illustrates the recommended power and signal connections for the IMX515 camera module. It is divided into three main sections: Power Connections, Signal Connections, and CSI-2 Receiver Connections.

**Power Connections:**

- AVDD (2.9 V):** Connected to pins E10, F2, D8, A10, G1, G10, E8, E9, G2, A1, B8, G7, C8, D10, D10, A9, B1, C1, C10, D4, D6, E3, G9, E5, A2, D3. Decoupling capacitors: 0.1  $\mu$ F and 1.0  $\mu$ F for E10, F2, D8; 0.1  $\mu$ F and 4.7  $\mu$ F for A10, G1, G10, E8, E9, G2; 0.01  $\mu$ F and 1.0  $\mu$ F for A1, B8, G7, C8; 0.1  $\mu$ F and 4.7  $\mu$ F for D10, D10; 0.1  $\mu$ F and 4.7  $\mu$ F for A9, B1, C1, C10; 0.1  $\mu$ F and 4.7  $\mu$ F for D4, D6, E3, G9; 0.01  $\mu$ F and 1.0  $\mu$ F for E5; 0.1  $\mu$ F and 1.0  $\mu$ F for A2; 0.1  $\mu$ F and 1.0  $\mu$ F for D3.
- OVDD (1.8 V):** Connected to pins A10, G1, G10, E8, E9, G2, A1, B8, G7, C8, D10, D10, A9, B1, C1, C10, D4, D6, E3, G9, E5, A2, D3. Decoupling capacitors: 0.1  $\mu$ F and 4.7  $\mu$ F for A10, G1, G10, E8, E9, G2; 0.01  $\mu$ F and 1.0  $\mu$ F for A1, B8, G7, C8; 0.1  $\mu$ F and 4.7  $\mu$ F for D10, D10; 0.1  $\mu$ F and 4.7  $\mu$ F for A9, B1, C1, C10; 0.1  $\mu$ F and 4.7  $\mu$ F for D4, D6, E3, G9; 0.01  $\mu$ F and 1.0  $\mu$ F for E5; 0.1  $\mu$ F and 1.0  $\mu$ F for A2; 0.1  $\mu$ F and 1.0  $\mu$ F for D3.
- DVDD (1.1 V):** Connected to pins A10, G1, G10, E8, E9, G2, A1, B8, G7, C8, D10, D10, A9, B1, C1, C10, D4, D6, E3, G9, E5, A2, D3. Decoupling capacitors: 0.1  $\mu$ F and 4.7  $\mu$ F for A10, G1, G10, E8, E9, G2; 0.01  $\mu$ F and 1.0  $\mu$ F for A1, B8, G7, C8; 0.1  $\mu$ F and 4.7  $\mu$ F for D10, D10; 0.1  $\mu$ F and 4.7  $\mu$ F for A9, B1, C1, C10; 0.1  $\mu$ F and 4.7  $\mu$ F for D4, D6, E3, G9; 0.01  $\mu$ F and 1.0  $\mu$ F for E5; 0.1  $\mu$ F and 1.0  $\mu$ F for A2; 0.1  $\mu$ F and 1.0  $\mu$ F for D3.

**Signal Connections:**

- SCL:** Pin E4
- SDA:** Pin G5
- XHS:** Pin F3
- XVS:** Pin G4
- XCLR:** Pin E6
- SLAMODE0:** Pin F8
- SLAMODE1:** Pin G6
- INCK:** Pin G3
- TVMON:** Pin E7 (OPEN)
- TENABLE:** Pin F4 (OPEN)
- TOUT:** Pin F5 (OPEN)
- VRHT:** Pin F7 (1.0  $\mu$ F)
- VRLRS:** Pin F8 (10  $\mu$ F)
- VRLT:** Pin F9 (4.7  $\mu$ F)

**CSI-2 Receiver Connections:**

- DCKP:** Pin B5
- DCKN:** Pin C5
- DMO1P:** Pin B6
- DMO1N:** Pin C6
- DMO2P:** Pin B4
- DMO2N:** Pin C4
- DMO3P:** Pin B7
- DMO3N:** Pin C7
- DMO4P:** Pin B3
- DMO4N:** Pin C3

**Common GND:** All ground connections are tied to a common ground.

Sony Semiconductor Solutions Corporation cannot assume responsibility for any problems arising out of the use of these circuits or for any infringement of third party and other right due to same.


## Spot Pixel Specifications

( $AV_{DD} = 2.9\text{ V}$ ,  $OV_{DD} = 1.8\text{ V}$ ,  $DV_{DD} = 1.1\text{ V}$ ,  $T_j = 60\text{ }^{\circ}\text{C}$ , 30 frame/s, Gain: 0 dB)

Type of distortion	Level	Maximum distorted pixels in each zone				Measurement method	Remarks
		II'	Effective OB	III	Ineffective OB		
Black or white pixels at high light	30 % ≤ D	60	No evaluation criteria applied			1	
White pixels in the dark	5.6 mV ≤ D	800		No evaluation criteria applied		2	1/30 s storage
Black pixels at signal saturated	D ≤ 428 mV	0	No evaluation criteria applied			3	

- Note) 1. Zone is specified based on all-pixel drive mode  
 2. D...Spot pixel level  
 3. See the Spot Pixel Pattern Specifications for the use of spot pixels that are close to each other.

## Zone Definition

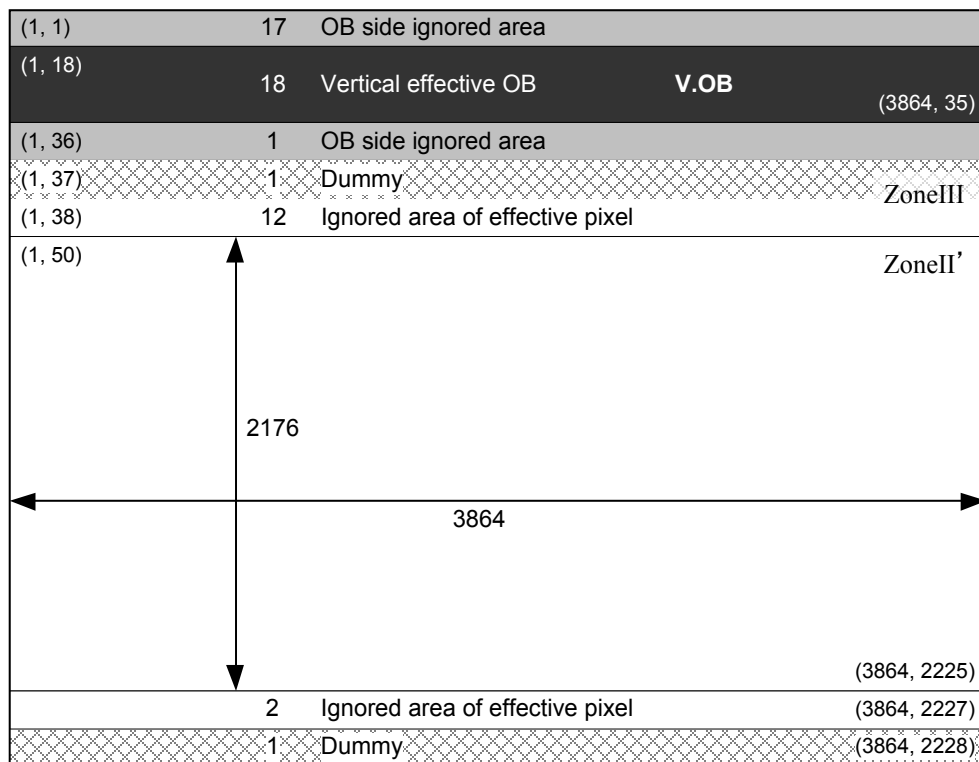

## Notice on White Pixels Specifications

After delivery inspection of CMOS image sensors, particle radiation such as cosmic rays etc. may distort pixels of CMOS image sensors, and then distorted pixels may cause white point effects in dark signals in picture images. (Such white point effects shall be hereinafter referred to as "White Pixels".)

Unfortunately, it is not possible with current scientific technology for CMOS image sensors to prevent such White Pixels. It is recommended that when you use CMOS image sensors, you should consider taking measures against such White Pixels, such as adoption of automatic compensation systems for White Pixels in dark signals and establishment of quality assurance standards.

Unless the Seller's liability for White Pixels is otherwise set forth in an agreement between you and the Seller, Sony Semiconductor Solutions Corporation or its distributors (hereinafter collectively referred to as the "Seller") will, at the Seller's expense, replace such CMOS image sensors, in the event the CMOS image sensors delivered by the Seller are found to be to the Seller's satisfaction, to have over the allowable range of White Pixels as set forth above under the heading "Spot Pixels Specifications", within the period of three months after the delivery date of such CMOS image sensors from the Seller to you; provided that the Seller disclaims and will not assume any liability after you have incorporated such CMOS image sensors into other products.

Please be aware that Seller disclaims and will not assume any liability for (1) CMOS image sensors fabricated, altered or modified after delivery to you, (2) CMOS image sensors incorporated into other products, (3) CMOS image sensors shipped to a third party in any form whatsoever, or (4) CMOS image sensors delivered to you over three months ago. Except the above mentioned replacement by Seller, neither Sony Semiconductor Solutions Corporation nor its distributors will assume any liability for White Pixels. Please resolve any problem or trouble arising from or in connection with White Pixels at your costs and expenses.

### [For Your Reference] The Annual Number of White Pixels Occurrence

The chart below shows the predictable data on the annual number of White Pixels occurrence in a single-story building in Tokyo at an altitude of 0 meters. It is recommended that you should consider taking measures against the annual White Pixels, such as adoption of automatic compensation systems appropriate for each annual number of White Pixels occurrence.

The data in the chart is based on records of past field tests, and signifies estimated number of White Pixels calculated according to structures and electrical properties of each device. Moreover, the data in the chart is for your reference purpose only, and is not to be used as part of any CMOS image sensor specifications.

#### Example of Annual Number of Occurrence

White Pixel Level (in case of integration time = 1/30 s) (T <sub>J</sub> = 60 °C)	Annual number of occurrence
5.6 mV or higher	42 pcs
10.0 mV or higher	23 pcs
24.0 mV or higher	10 pcs
50.0 mV or higher	4 pcs
72.0 mV or higher	3 pcs

Note 1) The above data indicates the number of White Pixels occurrence when a CMOS image sensor is left for a year.

Note 2) The annual number of White Pixels occurrence fluctuates depending on the CMOS image sensor storage environment (such as altitude, geomagnetic latitude and building structure), time (solar activity effects) and so on. Moreover, there may be statistic errors. Please take notice and understand that this is an example of test data with experiments that have being conducted over a specific time period and in a specific environment.

Note 3) This data does not guarantee the upper limits of the number of White Pixels occurrence.


## Measurement Method for Spot Pixels

After setting to standard imaging condition II, and the device driver should be set to meet bias and clock voltage conditions. Configure the drive circuit according to the example and measure.

### 1. Black or white pixels at high light

After adjusting the luminous intensity so that the average value  $V_G$  of the Gb / Gr signal outputs is 300 mV, measure the local dip point (black pixel at high light,  $V_{iB}$ ) and peak point (white pixel at high light,  $V_{iK}$ ) in the Gr / Gb / R / B signal output  $V_i$  ( $i = \text{Gr} / \text{Gb} / \text{R} / \text{B}$ ), and substitute the value into the following formula.

$$\text{Spot pixel level } D = ((V_{iB} \text{ or } V_{iK}) / \text{Average value of } V_i) \times 100 [\%]$$

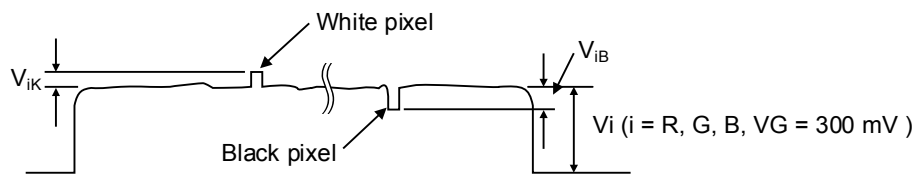


Signal output waveform of R / G / B channel

### 2. White pixels in the dark

Set the device to a dark setting and measure the local peak point of the signal output waveform, using the average value of the dark signal output as a reference.

### 3. Black pixels at signal saturated

Set the device to operate in saturation and measure the local dip point, using the OB output as a reference.

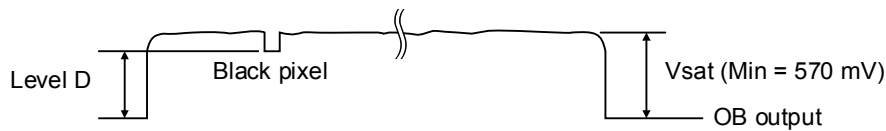




Signal output waveform of R / G / B channel

Spot Pixel Pattern Specifications

White Pixel, Black Pixel, and Bright Pixel are judged from the pattern whether they are allowed or rejected, and counted.


List of White Pixel, Black Pixel, and Bright Pixel Patterns

No.	Pattern 	White pixel Black pixel Bright pixel
1		Rejected
2		Rejected

- Note)
1. “●” shows the position of white pixel, black pixel, or bright pixel.  
Each pattern is defined by three white pixels, three black pixels, or three bright pixels.  
(Example: If one black pixel and two white pixels are located like pattern No.1, they are not judged to be rejected.)
  2. Products that have one or more rejected patterns are filtered out.
  3. All spot pixels are subject to the “Maximum distorted pixels in each zone” judgment in the section of “Spot Pixel Specifications” even if they do not correspond to the patterns in the table above.



---

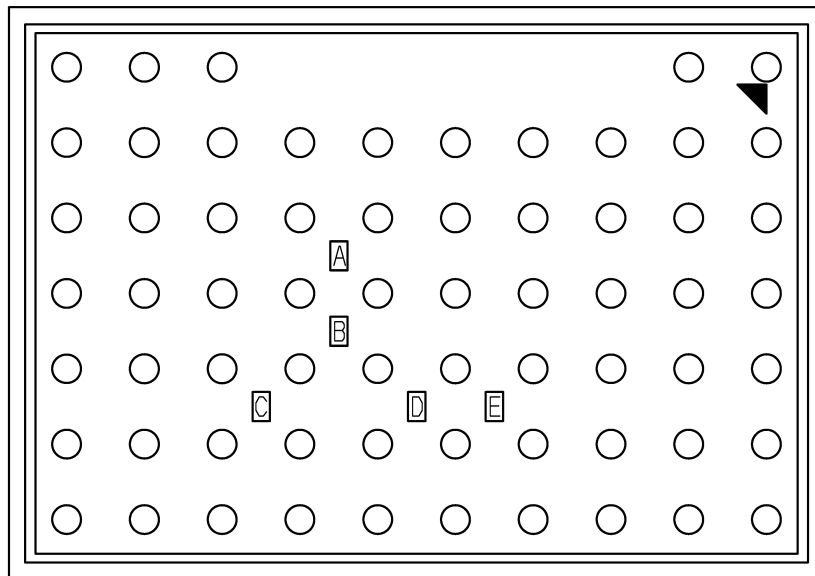**Marking**

- Note
- 1) Year code shall be arranged in A part.
  - 2) Month code shall be arranged in B part.
  - 3) WID (Slice No.) shall be arranged in C part.
  - 4) Lot No. shall be arranged in D to E part.

DRAWING No. AM-C515AAQN

---

## Notes On Handling

### 1. Static charge prevention

Image sensors are easily damaged by static discharge. Before handling be sure to take the following protective measures.

- (1) Either handle bare handed or use non-chargeable gloves, clothes or material.  
Also use conductive shoes.
- (2) Use a wrist strap when handling directly.
- (3) Install grounded conductive mats on the floor and working table to prevent the generation of static electricity.
- (4) Ionized air is recommended for discharge when handling image sensors.
- (5) For the shipment of mounted boards, use boxes treated for the prevention of static charges.

### 2. Protection from dust and dirt

Image sensors are packed and delivered with care taken to protect the element glass surfaces from harmful dust and dirt. Clean glass surfaces with the following operations as required before use.

- (1) Perform all lens assembly and other work in a clean environment (class 1000 or less).
- (2) Do not touch the glass surface with hand and make any object contact with it.  
If dust or other is stuck to a glass surface, blow it off with an air blower.  
(For dust stuck through static electricity, ionized air is recommended.)
- (3) Clean with a cotton swab with ethyl alcohol if grease stained. Be careful not to scratch the glass.
- (4) Keep in a dedicated case to protect from dust and dirt. To prevent dew condensation, preheat or precool when moving to a room with great temperature differences.
- (5) When a protective tape is applied before shipping, remove the tape applied for electrostatic protection just before use. Do not reuse the tape.

### 3. Installing (attaching)


- (1) If a load is applied to the entire surface by a hard component, bending stress may be generated and the package may fracture, etc., depending on the flatness of the bottom of the package.  
Therefore, for installation, use either an elastic load, such as a spring plate, or an adhesive.
- (2) The adhesive may cause the marking on the rear surface to disappear.
- (3) If metal, etc., clash or rub against the package surface, the package may chip or fragment and generate dust.
- (4) Acrylate anaerobic adhesives are generally used to attach this product. In addition, cyanoacrylate instantaneous adhesives are sometimes used jointly with acrylate anaerobic adhesives to hold the product in place until the adhesive completely hardens. (Reference)
- (5) Note that the sensor may be damaged when using ultraviolet ray and infrared laser for mounting it.

#### 4. Reflow soldering conditions

The following items should be observed for reflow soldering.

(1) Recommended temperature profile for reflow soldering

Control item	Profile (at part side surface)
1. Preheating	150 to 180 °C 60 to 120 s
2. Temperature up (down)	+4 °C/s or less (- 6 °C/s or less)
3. Reflow temperature	Over 230 °C 10 to 30 s Max. 5 °C/s
4. Peak temperature	Max. 240 ± 5 °C

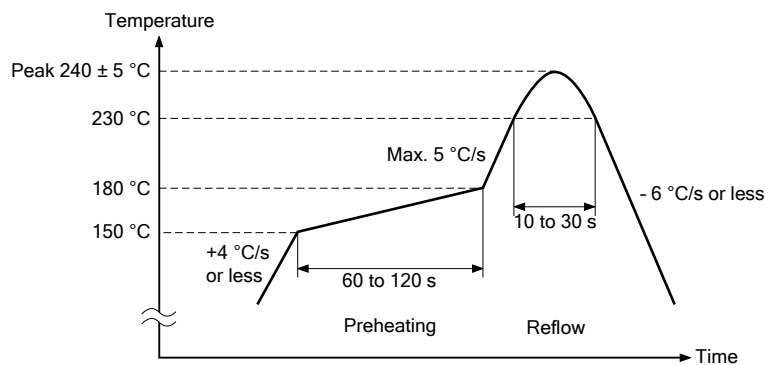

(2) Reflow conditions

- Make sure the temperature of the upper surface of the seal glass resin adhesive portion of the package does not exceed 245 °C.
- Perform the reflow soldering only one time.
- Finish reflow soldering within 72 h after unsealing the degassed packing.  
Store the products under the condition of temperature of 30 °C or less and humidity of 70 % RH or less after unsealing the package.
- Perform re-baking only one time under the condition at 125 °C for 24 h.
- Note that condensation on glass or discoloration on resin interfaces may occur if the actual temperature and time exceed the conditions mentioned above.

(3) Others


- Carry out evaluation for the solder joint reliability in your company.
- After the reflow, the paste residue of protective tape may remain around the seal glass.  
(The paste residue of protective tape should be ignored except remarkable one.)
- Note that X-ray inspection may damage characteristics of the sensor.

#### 5. Others

- Do not expose to strong light (sun rays) for long periods, as the color filters of color devices will be discolored.
- Exposure to high temperature or humidity will affect the characteristics. Accordingly avoid storage or use in such conditions.
- This product is precision optical parts, so care should be taken not to apply excessive mechanical shocks or force.
- Note that imaging characteristics of the sensor may be affected when approaching strong electromagnetic wave or magnetic field during operation.
- Note that image may be affected by the light leaked to optical black when using an infrared cut filter that has transparency in near infrared ray area during shooting subjects with high luminance.
- Please perform the tilt adjustment for the optical axis in your company as required.

Package Outline

(Unit:mm)

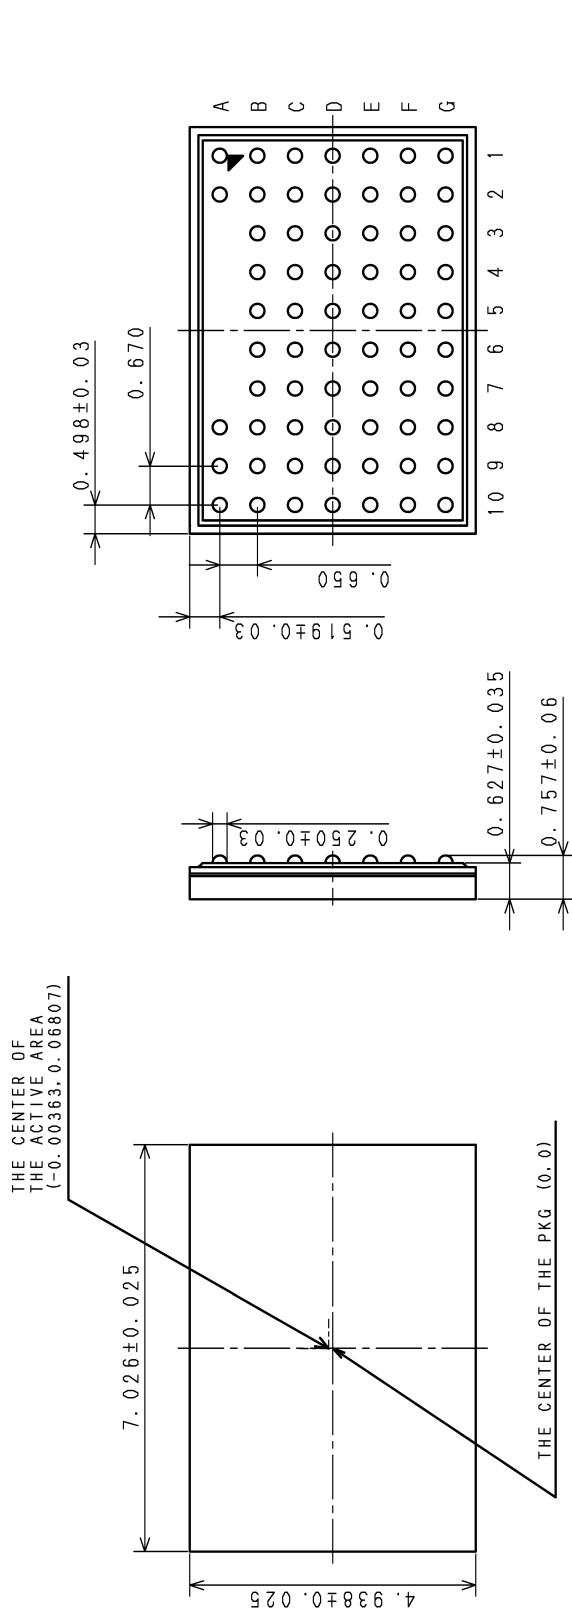

- 1) The height from the top of cover glass to the effective image area is 0.445±0.02mm
- 2) The thickness of the cover glass is 0.4mm. Refractive index is 1.5

PACKAGE STRUCTURE	
CLASSIFICATION	BGA
TERMINAL TREATMENT	Sn (96.5%), Ag (3%), Cu (0.5%)
PIN NUMBER	65Pin
PACKAGE WEIGHT (Typ.)	0.05g
DRAWING NUMBER	AS-C109 (E)

---

## List of Trademark Logos and Definition Statements

The logo consists of the word "STARVIS" in white, bold, sans-serif capital letters, centered within a solid black rectangular background.

\* STARVIS is a trademark of Sony Corporation. The STARVIS is back-illuminated pixel technology used in CMOS image sensors for surveillance camera applications. It features a sensitivity of 2000 mV or more per  $1\ \mu\text{m}^2$  (color product, when imaging with a  $706\ \text{cd/m}^2$  light source, F5.6 in 1 s accumulation equivalent), and realizes high picture quality in the visible-light and near infrared light regions.

## Revision History

Date (Y / M / D)	Rev.	Page	Description
2019 / 06 / 13	0.1	—	Limited Edition (Not for Customer)
2020 / 08 / 05	0.2	—	First Edition
2021 / 02 / 01	E21110	—	First Edition (Official Edition)
		1	Added: Copyright 2021
		7	Update: TBD data Tolerance values of the Optical Center diagram
		14	Update: TBD data Current Consumption values
		21	Update: TBD Spectral Sensitivity Characteristics diagram
		22	Update: TBD data Image Sensor Characteristics table Added: Item of G sensitivity (Old measurement conditions) in table
		24	Update: TBD data Values of Measurement Method Added: Item of Old measurement conditions in “1. Sensitivity”
		43 to 44	Added: Register Map items Registers are added to the addresses of (4) 34 ** h, (5) 35 ** h, (7) 37 ** h, and (9) 39 ** h
		47	Correction: Values of Operating mode table Frame rate and 1H period value in Horizontal/Vertical 2/2-line binning mode
		58	Correction: Window Cropping Mode diagram Calculation formula in Image Drawing of Window Cropping Mode in inverted direction
		85	Update: TBD data Values of Spot Pixel Specifications table
		86	Update: TBD data Values of Notice on White Pixels Specifications table
		87	Update: TBD data Values of Measurement Method for Spot Pixels
		88	Correction: The pattern diagram in Spot Pixel Pattern Specifications
		89	Update: TBD Marking diagram
		92	Update: TBD Package Outline diagram

Sales: Shenzhen Sunnywale Inc, [www.sunnywale.com](http://www.sunnywale.com), awin@sunnywale.com, Wechat: 9308762