



USB 2.0 Video

PC Camera Controller

ZX302A (SN9C270A)

Datasheet

Document No.: SA3TD- 20120104-A

Version: v0.02

For the latest data sheet, please visit www.sunnywale.com

Revision	Date	Description
0.01	2012_01_03	Draft Release
0.02	2012_03_15	Formal Release
Apply to		ZX302A/SN9C270A

ZX302A is an upgraded version of SN9C270A, compatible with all SN9C270A performance parameters



Table of Contents

1	General Description	4
2	Features	4
2.1	System.....	4
2.2	USB Controller	5
2.3	Sensor Interface.....	5
2.4	Color processing	5
2.5	Scaling Engine	6
2.6	JPEG Encoder	6
2.7	Video / Still Image	6
2.8	Frame rate	6
2.9	GPIO	7
2.10	Micro Controller and USB Device Features.....	7
2.11	Pre-Defined for USB Video Class.....	7
2.12	Platform Support	7
3	Function Block Diagram.....	9
3.1	Block Diagram	9
4	Pin Assignment.....	10
4.1	ZX302A – 32 pins QFN	10
4.1.1	Pin-out Diagram.....	10
4.1.2	Pin Description	10
5	Electrical Characteristics	12
5.1	DC operating Condition	12
5.1.1	Absolute Maximum Ratings	12
5.1.2	Recommended Operating Conditions	12
5.1.3	Low Dropout Regulator Electrical Characteristics.....	12
5.1.4	DC Electrical Characteristics	13
5.2	AC operating Condition	14
5.2.1	Sensor Interface	14
5.2.2	I2C Control Interface	16
5.2.3	Serial Flash Interface	16
6	Package Information.....	18
6.1	Nomenclature	18
6.2	32 pins QFN.....	19



7	Contact Information.....	20
---	--------------------------	----

1 General Description

The ZX302A is a USB 2.0 High-Speed (HS) compatible PC camera controller. The low power design provides extreme low consumption on device standby, operation and even high performance state. The low thermal design gets the module operating temperature inside platform under reasonable range. The ZX302A is fully compliant with USB Video Class. The OS systems supported are including Windows XP, Windows Vista, Windows 7 and the coming Windows 8.

The new generation image signal processing engine brings sight video experience. The high performance Motion-JPEG compression engine makes variant compression ratio to consider bandwidth requirement well which output MJPG data format. It is also a high performance and high speed transmission engine on YUV un-compression data format. With the integrated sensor interface and color processing engine, it can supports most available CMOS sensors that range from VGA to QXGA. It is controlled by the embedded micro-controller and the statistics for 3A (AE / AWB / AF) are built-in.

To decrease the BOM cost and PCB area, the ZX302A integrates 2 voltage regulators for sensor power. One is for analog part and the other is for I/O power. Furthermore, the built-in Clock Synthesizer for performance and power saving makes an external crystal is not needed.

To fully meet Ultrabook requirement, one of the most significant of ZX302A is to save power consumption 40% less than previous backends. The Low Power Management Sleep State(LPM L1) is supported to save power consumption for host controller. The QFN32 3x6mm package dimension is also for the thin design.

The flexible architecture is consisted of mask ROM, internal RAM and external serial-flash which can stores the customized codes and parameters. With the highly-integrated firmware architecture and the developing kit provided by SONiX, it's easy for 3rd party to fulfill customized features.

2 Features

2.1 System

- n 3.3V, 1.2V power supply are necessary (Core power 1.2V provide by Backend IC)
- n Extreme low power consumption, < 30mA when standby and < 0.5mA when suspend (Power consumption of sensor is not included)
- n Built-in Clock Synthesizer for performance and power saving
- n Built-in PLL for internal clock generation

- n Using external serial flash to store customized code and data
- n No external RAM needed
- n 1.8V output power source to supply CMOS sensor's I/O power
- n 2.8V output power source to supply CMOS sensor's analog power(2.7V~3.3V control by FW setting)
- n QFN package of 32-pins

2.2 USB Controller

- n USB 2.0 high-speed and full-speed compatible
- n USB Video Class 1.1 compliant
- n USB2.0 HS/FS auto sense and switch
- n USB FS mode and USB disconnection are programmable
- n USB Low Power Management Sleep State with RTD3
- n 4 endpoints: CONTROL pipe, UVC Interrupt IN and Isochronous-IN (video, 24MB/s max)
- n 6 alternate settings for Video Streaming Interface

2.3 Sensor Interface

- n Support SXGA(1.3MP, 1280x1024), HD(1.0MP, 1280x720), VGA(0.3MP, 640x480) CMOS ISP sensor
- n Support YUY2 and RAW (Bayer-Pattern) image data format from sensor
- n Output clock: 480/(m*n) MHz output clock request of CMOS sensor silicon.
- n Up to 96Mhz pixel clock is acceptable
- n Support industrial standard 2-wire serial interface for sensor control

2.4 Color processing

- n AE histogram statistics
- n AWB window statistics
- n AF edge window statistics
- n On-the fly defect-pixel cancellation
- n Lens shading compensation for R/G/B channel
- n Low pass filter
- n Individual digital color gain control for R/Gr/Gb/B channels
- n Individual digital color gain control for Y/Cb/Cr channels
- n Pixel offset (optical black) compensation for R/Gr/Gb/B channels
- n Programmable gamma table for RGB channels

- n Programmable color conversion matrix for R/G/B input
- n Configurable noise reduction
- n De-color aliasing in Edge
- n Configurable edge enhancement
- n Programmable gamma table for Y channel
- n Configurable windowing function after processed image
- n Programmable hue and saturation
- n Auto Gamma for backlight preview
- n Auto Frequency for MSOC

2.5 Scaling Engine

- n Scale down on Y/Cb/Cr
- n For SXGA / VGA sensors, combined scaling and windowing function provides similar view angle for SXGA / HD / SVGA / VGA / CIF / QVGA / QCIF / QQVGA output format
- n Fine scaling(128/m, m:128 ~ 2047)

2.6 JPEG Encoder

- n JPEG YUV422 baseline format
- n Built-in JPEG encoder support USB Video Class MJPEG payload
- n 128 bytes quantization tables for Y and C provide programmable compression ratio

2.7 Video / Still Image

- n Output video / still image format:
 - Ø USB Video Class Uncompressed YUY2 payload (16bits/pixel)
 - Ø USB Video Class MJPEG payload
- n Video streaming up to 30fps@HD at USB2.0 high-speed mode.
- n Still Image capture up to SXGA and is able to support UVC still image capture method 1/2

2.8 Frame rate

- n Frame rate considering USB bandwidth limitation

	Normal Resolution @ USB High-Speed						
Output format	SXGA	HD	SVGA	VGA	CIF	QVGA	QCIF
YUY2	9fps	12fps	25fps	30fps	30fps	60fps	60fps
MJPEG	60fps	60fps	120fps	120fps	120fps	120fps	120fps

- n Frame rate considering sensor characteristic
The maximum frame rate is limited by how many fps that sensor can output under acceptable maximum pixel clock

2.9 GPIO

- n 3 GPIOs are predefined as following functions including LED control, serial flash write protect, sensor reset.
- n 1 GPIO is reserved for customized application.

2.10 Micro Controller and USB Device Features

- n Built-in 8032 micro controller with 3K bytes data memory, and maximum CPU clock rate is 24MHz
- n Load extended F/W up to 64KB from external serial flash.
- n Load VID/PID, manufacturer, product and serial number string from external serial flash.
- n Load UVC parameter definition from external serial flash.
- n F/W is upgradeable from PC
- n Force USB at FS mode / Force USB disconnect
- n Interrupt at the end of H/W windowing
- n CPU watch dog

2.11 Pre-Defined for USB Video Class


- n Brightness control (UVC defined)
- n Contrast control (UVC defined)
- n Hue control (UVC defined)
- n Saturation control (UVC defined)
- n Sharpness control (UVC defined)
- n Gamma control (UVC defined)
- n Privacy control (UVC defined)
- n LED indicator on video streaming
- n UVC Extension unit support

2.12 Platform Support

- n Microsoft Windows XP 32bit SP2, Microsoft Windows XP 64bit, Microsoft Windows Vista 32bit, Microsoft Windows Vista 64bit, Microsoft Window 7 32bit, Microsoft Window 7 64bit, Microsoft Window 8
- n Mac - OS X 10.4.8 or later
- n Linux with UVC driver (open source available at <http://linux-uvc.berlios.de/>)

3 Function Block Diagram


3.1 Block Diagram

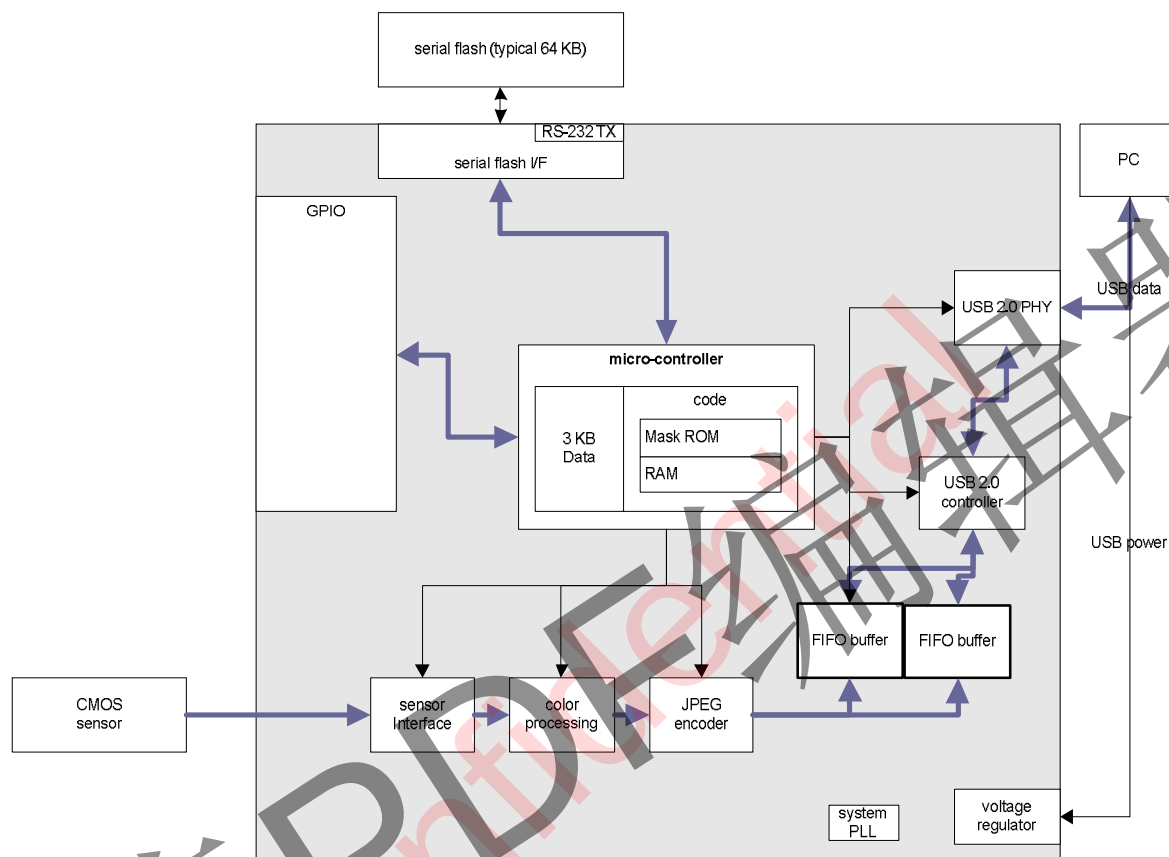

4 Pin Assignment

4.1 ZX302A – 32 pins QFN

4.1.1 Pin-out Diagram

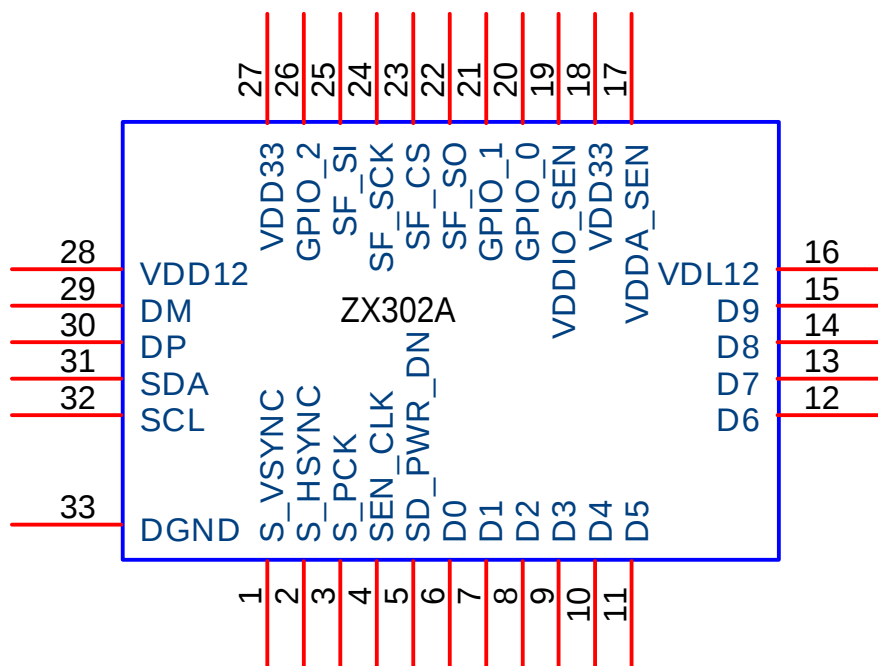

4.1.2 Pin Description

Pin No.	Pin Name	Description
1	S_VSYNC	Sensor vsync
2	S_HSYNC	Sensor hsync
3	S_PCK	Sensor pixel clock
4	SEN_CLK	Sensor clock
5	SD_PWR_DN	General purpose I/O
6	D0	Sensor image data
7	D1	Sensor image data
8	D2	Sensor image data
9	D3	Sensor image data
10	D4	Sensor image data
11	D5	Sensor image data
12	D6	Sensor image data
13	D7	Sensor image data

14	D8	Sensor image data
15	D9	Sensor image data
16	VDL12	Internal LDO VOUT for DSP core power
17	VDDA_SEN	Internal LDO VOUT for sensor analog power
18	VDD33	Internal LDO VIN
19	VDDIO_SEN	Internal LDO VOUT for sensor IO power
20	GPIO_0	General purpose I/O
21	GPIO_1	General purpose I/O
22	SF_SO	SPI data out to serial flash
23	SF_CS	Chip select to serial flash
24	SF_SCK	Clock to serial flash
25	SF_SI	SPI data in from serial flash
26	GPIO_2	General purpose I/O
27	VDD33	DSP system power
28	VDD12	1.2V DSP core power
29	DM	D- for USB
30	DP	D+ for USB
31	SDA	I ² C data
32	SCL	I ² C clock

Direction denotation:

O	Output	OU	Output unknown	OH	Output high	OL	Output low
I	Input	B	Bi-direction	F	Firmware control		
A	Analog	P	Power	Po	Power Output		

5 Electrical Characteristics

5.1 DC operating Condition

5.1.1 Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
VDD33	Power Supply	-0.3 ~ 3.6	V
VDD33_18	Power Supply	-0.3 ~ 3.6	V
DVDD	Power Supply	-0.12 ~ 1.32	V
Vin	Input Voltage	-0.3 ~ VDD33 + 0.3	V
Vout	Output Voltage	-0.3 ~ VDD33 + 0.3	V

5.1.2 Recommended Operating Conditions

Symbol	Parameter	Typ	Units
VDD33	Power Supply	3.3	V
VDD33_18	Power Supply	3.3/1.8	V
DVDD	Power Supply	1.2	V
Vin	Input voltage	3.3	V

5.1.3 Low Dropout Regulator Electrical Characteristics

(Under Recommended Operating Conditions and VDD33=3.0 ~ 3.6V, Tj=0 to +70 °C)

Symbol	Parameter	Typ	Units
VDDA1	Power Supply for 2.8V LDO	3.3	V
VO275	Voltage output of 2.8V LDO	2.85	V
IO275	Output current capacity of 2.8V LDO	100	mA
VDD33	Power Supply for 1.8V LDO	3.3	V
VO180	Voltage output of 1.8V LDO	1.85	V
IO180	Output current capacity of 1.8V LDO	150	mA

5.1.4


DC Electrical Characteristics

(Under Recommended Operating Conditions and VDD33=3.0 ~ 3.6V, VDD33_18=1.62 ~ 3.6V, Tj=0 to +70 °C)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Vil (VDD33)	Input low voltage	CMOS	-0.3		0.2*VDD33	V
Vih(VDD33)	Input high voltage	CMOS	0.8*VDD33		VDD33+0.3	V
Vil (VDD33_18)	Input low voltage	CMOS	-0.3		0.2*VDD33_18	V
Vih(VDD33_18)	Input high voltage	CMOS	0.8*VDD33_18		VDD33_18+0.3	V
Iil	Input low current	no pull-up or pull-down	-1		1	μA
Iih	Input high current	no pull-up or pull-down	-1		1	μA
Ioz	Tri-state leakage current		-1		1	μA
Vol	Output Low voltage	Iol=4mA / 8mA			0.4	V
Voh	Output high voltage	Ioh=4mA / 8mA	2.4			V
Cin	Input capacitance			10		pF
Cout	Output capacitance			10		pF
Cbid	Bi-directional buffer Capacitance			10		pF
Rpu	Pull-up resistor			70K		Ω
Rpd	Pull-down resistor			70K		Ω

5.2 AC operating Condition


5.2.1 Sensor Interface

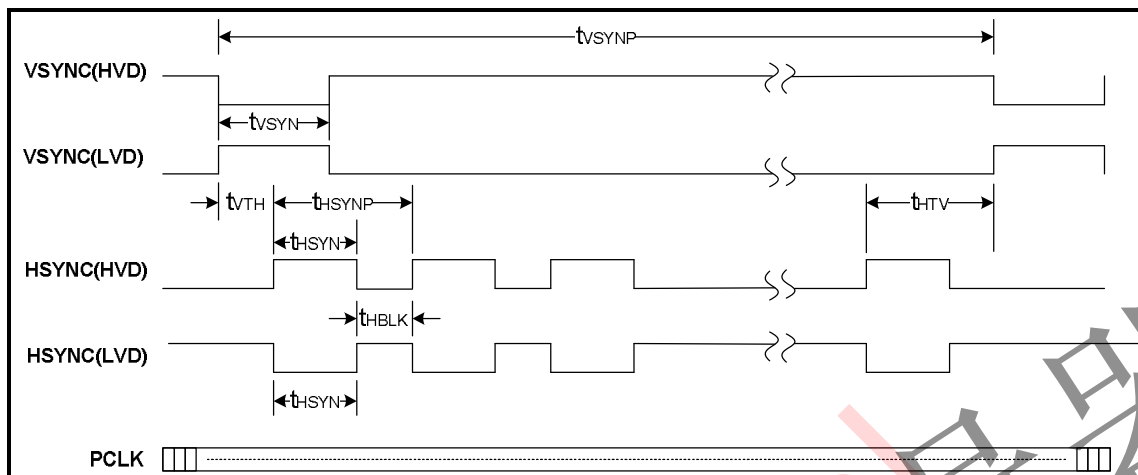

Parameter	Symbol	Min.	Typ.	Max.	Unit
VSYNC pulse width	t_{VSYN}	t_{PCLK}	-	-	ns
VSYNC to HSYNC	t_{VTH}	t_{PCLK}	-	-	ns
HSYNC pulse width	t_{HSYN}	t_{PCLK}	-	-	ns
Blank time between two HSYNC	t_{HBLK}	t_{PCLK}	-	-	ns
HSYNC to VSYNC	t_{HTV}	t_{HSYNP}			ns

Note:

- t_{SENCK} is period of internal clock for sensor post processing.
- t_{HSYNP} is period of Hsync, t_{VSYNP} is period of Vsync.
- HVD (High Valid), LVD (Low Valid).

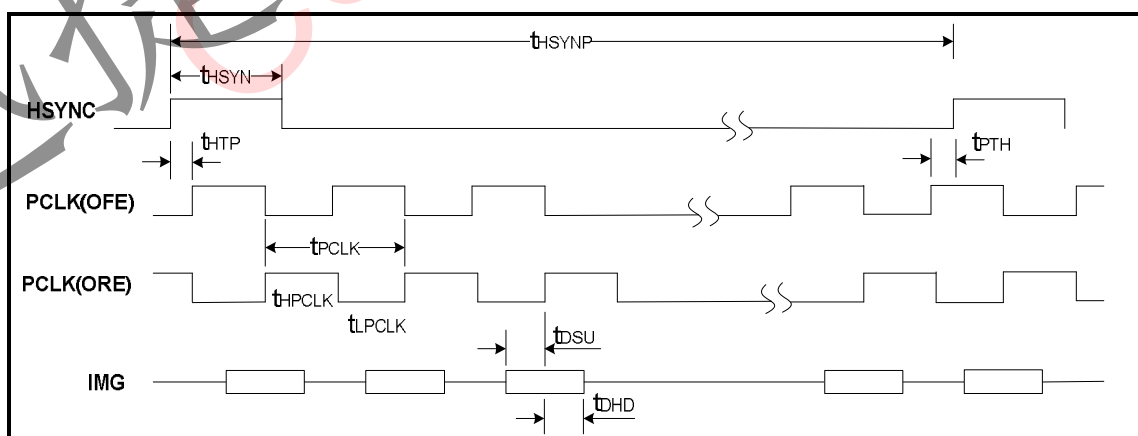



Parameter	Symbol	Min.	Typ.	Max.	Unit
-----------	--------	------	------	------	------

HSYNC pulse width	t_{HSYN}	t_{PCLK}	-	-	ns
HSYNC to PCLK	t_{HTP}	t_{SENCK}			ns
PCLK to HSYNC	t_{PTH}	t_{SENCK}			ns
PCLK Low Pulse Width	t_{LPCLK}	2.0	-	-	ns
PCLK High Pulse Width	t_{HPCLK}	2.0	-	-	ns
Frequency of pixel clock (YUV Mode)	f_{PCLK}	-	-	96	MHz
Frequency of pixel clock (RAW Data Mode)	f_{PCLK}	-	-	60	MHz
Image data setup time	t_{DSU}	2.0	-	-	ns
Image data hold time	t_{DHD}	2.0	-	-	ns

Note:


1. t_{SENCK} is period of internal clock for sensor post processing
2. ORE (On Rising Edge) means the timing act on rising edge
3. OFE (On Falling Edge) means the timing act on falling edge

5.2.2 I2C Control Interface

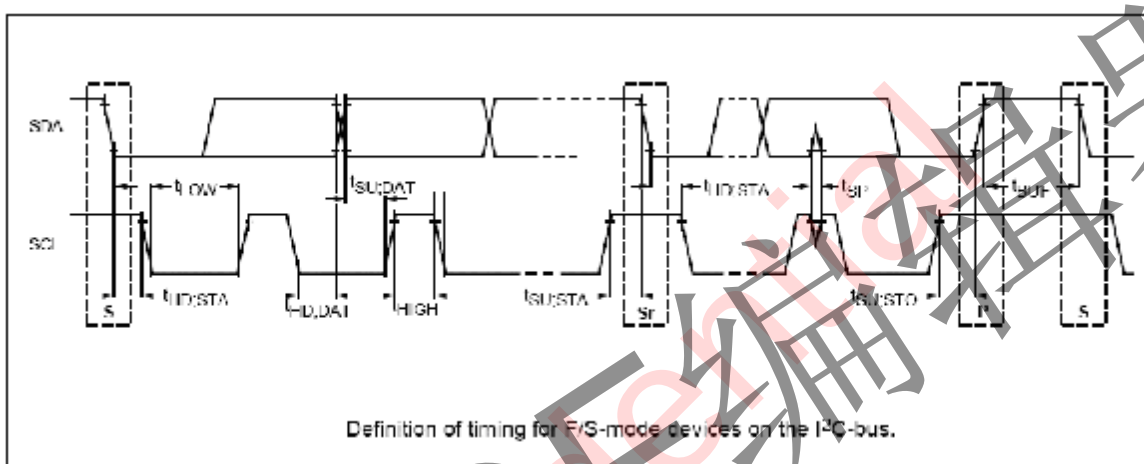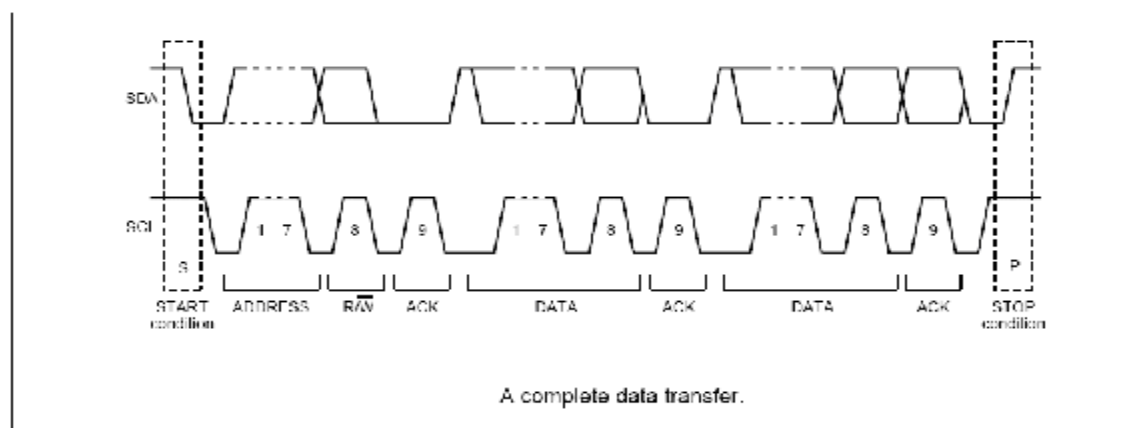

Parameter	Symbol	Standard mode			Fast mode			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
SCL clock frequency	f_{SCL}	-	98.7	-	-	394.7	-	kHz
Hold time START condition	$t_{HD,STA}$	-	5067	-	-	1267	-	ns
LOW period of the SCL clock	t_{LOW}	-	5067	-	-	1267	-	ns
HIGH period of the SCL clock	$t_{HD,STA}$	-	5067	-	-	1267	-	ns
Setup time for a repeated START condition	$t_{SU,STA}$	-	5067	-	-	1267	-	ns
Data hold time: Write	$t_{HD,DAT}$	-	2533	-	-	633	-	ns
Data hold time: Read	$t_{HD,DAT}$	10	-	-	10	-	-	ns
Data setup time: Write	$t_{SU,DAT}$	-	2533	-	-	633	-	ns
Data setup time: Read	$t_{SU,DAT}$	10	-	-	10	-	-	ns
Setup time for STOP condition	$t_{SU,STO}$	-	5066	-	-	1267	-	ns
Bus free time between a STOP and START condition	t_{BUF}	4.8	-	-	1.4	-	-	us

5.2.3 Serial Flash Interface

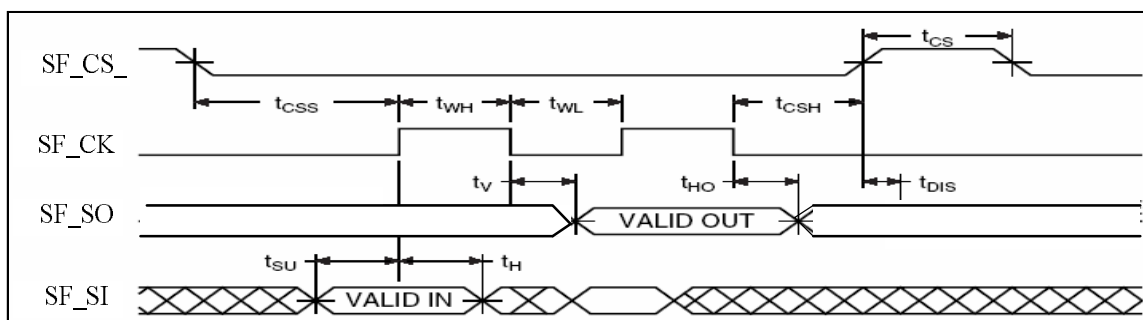

When $f_{SCK} = 24 \text{ Mhz}$ (SPEED=1)

Parameter	Symbol	Min.	Typ.	Max.	Unit
SCK clock frequency	f_{SCK}	-	24	-	MHz
Chip Select low to SF_CK Edge	t_{CSS}	36		-	ns
SF_CK Edge to Chip Select High	t_{CSH}	36		-	ns
Chip High period	t_{CS}	41.67		-	ns
Clock high period	t_{WH}	20.83	-	-	ns
Clock low period	t_{WL}	20.83	-	-	ns
Input Data setup time	t_{SU}	10	-	-	ns
Input Data hold time	t_H	10	-	-	ns
Output Data Valid time @ CL=20pF	t_V	-	-	5	ns
Output Data Hold time @ CL=20pF	t_{HO}	36	-	-	ns


When $f_{SCK} = 12 \text{ Mhz}$ (SPEED=3)

Parameter	Symbol	Min.	Typ.	Max.	Unit
SCK clock frequency	f_{SCK}	-	12	-	MHz
Chip Select low to SF_CK Edge	t_{CSS}	36	-	-	ns
SF_CK Edge to Chip Select High	t_{CSH}	36	-	-	ns
Chip High period	t_{CS}	41.67	-	-	ns
Clock high period	t_{WH}	41.67	-	-	ns
Clock low period	t_{WL}	41.67	-	-	ns
Input Data setup time	t_{SU}	10	-	-	ns
Input Data hold time	t_H	10	-	-	ns
Output Data Valid time @ CL=20pF	t_V	-	-	5	ns
Output Data Hold time @ CL=20pF	t_{HO}	78	-	-	ns


6 Package Information

6.1 Nomenclature

Example:

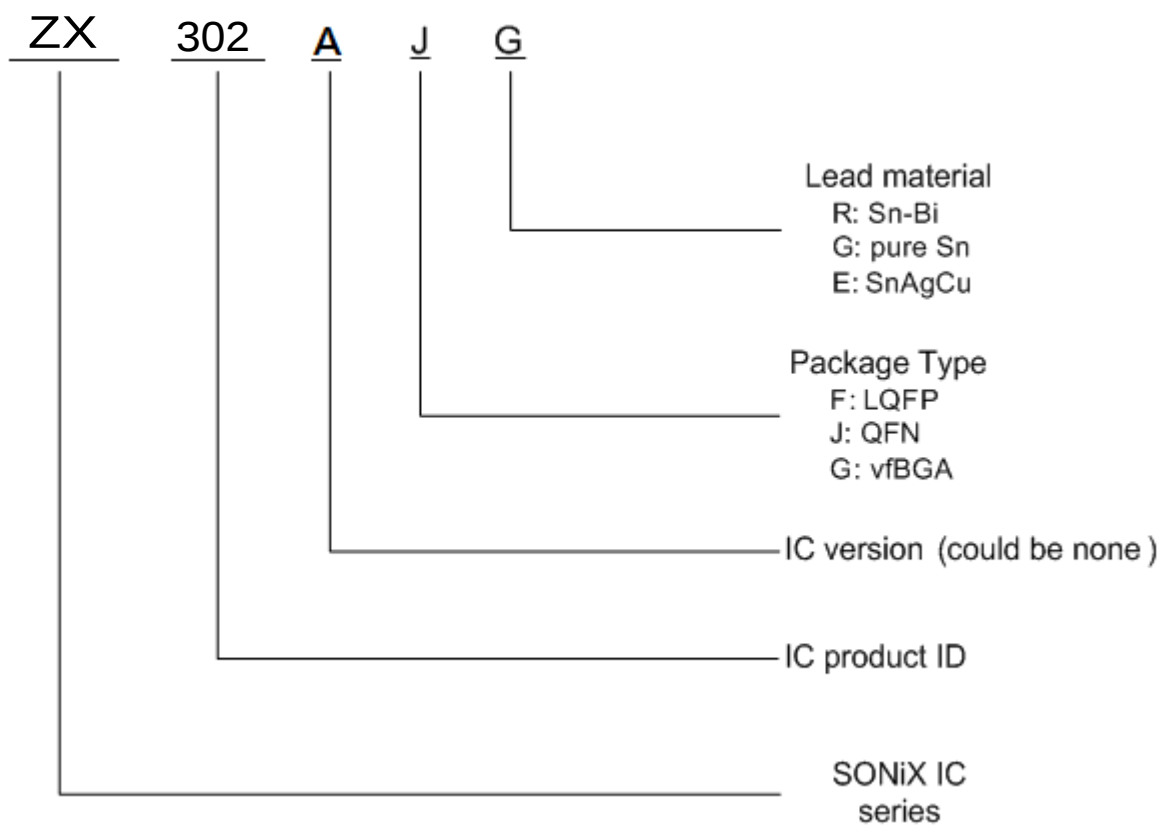

6.2 32 pins QFN

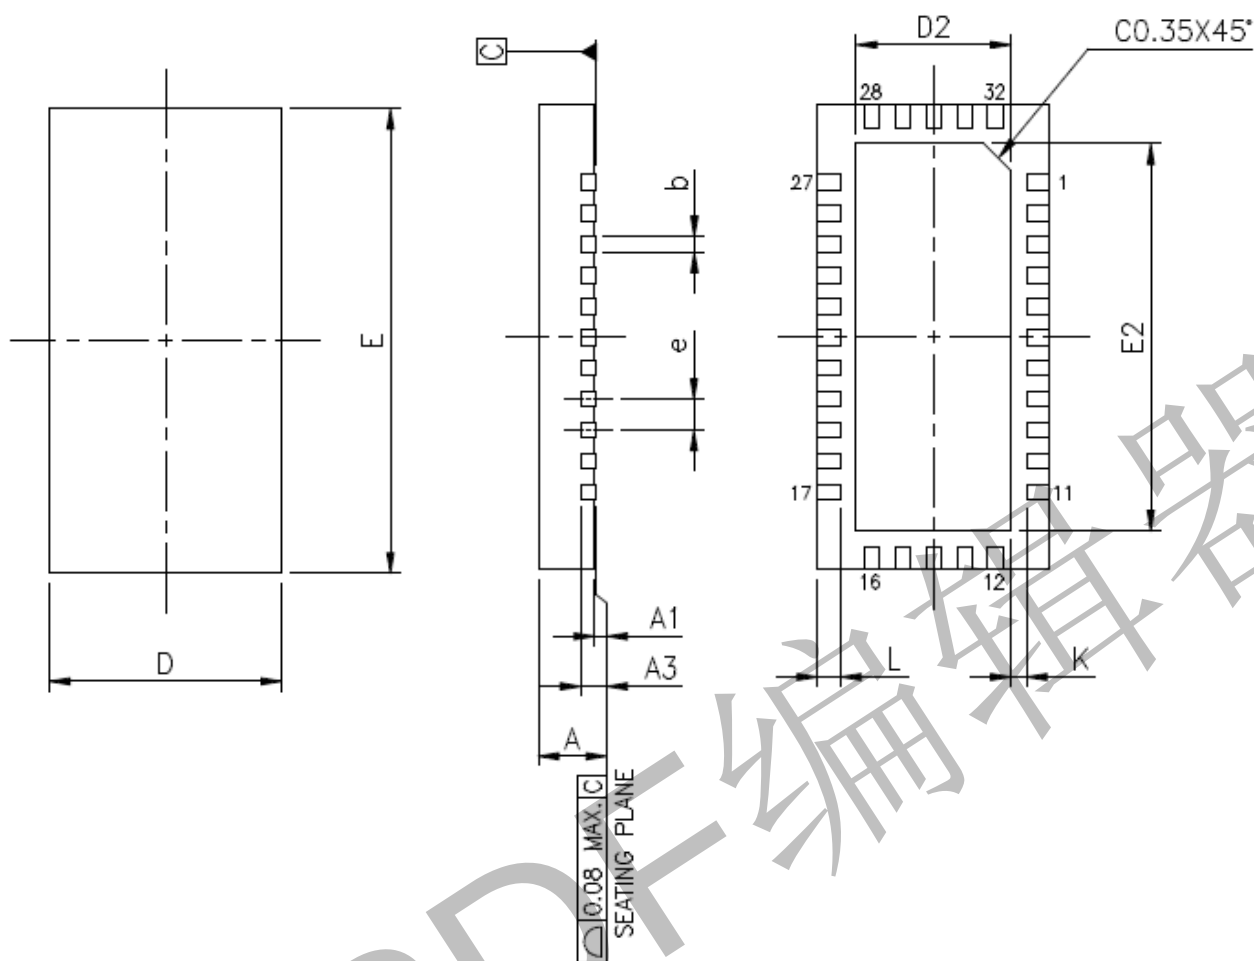

JEDEC OUTLINE	PACKAGE TYPE					
	N/A					
PKG CODE	WQFN(X332)			VQFN(N/A)		
SYMBOLS	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.80	0.85	0.90
A1	0.00	0.02	0.05	0.00	0.02	0.05
A3	0.203 REF.			0.203 REF.		
b	0.15	0.20	0.25	0.15	0.20	0.25
D	3.00 BSC			3.00 BSC		
E	6.00 BSC			6.00 BSC		
e	0.40 BSC			0.40 BSC		
L	0.20	0.30	0.40	0.20	0.30	0.40
K	0.20	—	—	0.20	—	—

PAD SIZE	E2			D2			LEAD FINISH		JEDEC CODE
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	Pure Tin	PPF	
83X201 MIL	4.90	5.00	5.05	1.90	2.00	2.05	X	V	N/A

本資料為松翰科技股份有限公司專有之財產，未經書面同意不准透露、使用，亦不准複印或轉變成任何其他形式使用 The information contained herein is the exclusive property of SONIX and shall not be distributed, reproduced or disclosed in whole or no in part without prior written permission of SONIX.

7 Contact Information

- n** Corporate Headquarters
10F-1, No.36, Taiyuan Street, Chupei City, Hsinchu, Taiwan
TEL: (886)3-8888-888 FAX: (886)3-5600-889
E-mail: <http://www.sonix.com.tw>

- n** Taipei Sales Office
15F-2, No.171 Song Ted Road, Taipei, Taiwan
TEL: (886)2-2222-1980 FAX: (886)2-2759-8180
E-mail: mkt@sonix.com.tw | sales@sonix.com.tw

- n** Hong Kong Sales Office
Unit No.705,Level 7 Tower 1,Grand Central Plaza 138 Shatin Rural Committee Road, Shatin, New Territories, Hong Kong
TEL: (852)2222-8086 FAX: (852)2723-9179
E-mail: hk@sonix.com.tw

- n** Shenzhen Contact Office
High Tech Industrial Park, Shenzhen, China
TEL: (86)755-8304 5321 FAX: (86)755 8304 5321
E-mail: awingiu@126.com

- n** U.S.A. Sales Office
TEL: 401-9492667 FAX: 401-9492848
E-mail: ascungiosonix@att.net

Sales: Shenzhen Sunnywale Inc, www.sunnywale.com , awin@sunnywale.com , Wechat: 9308762

本資料為松翰科技股份有限公司專有之財產，未經書面同意不准透露、使用，亦不准複印或轉變成任何其他形式使用 The information contained herein is the exclusive property of SONIX and shall not be distributed, reproduced or disclosed in whole or no in part without prior written permission of SONIX.