

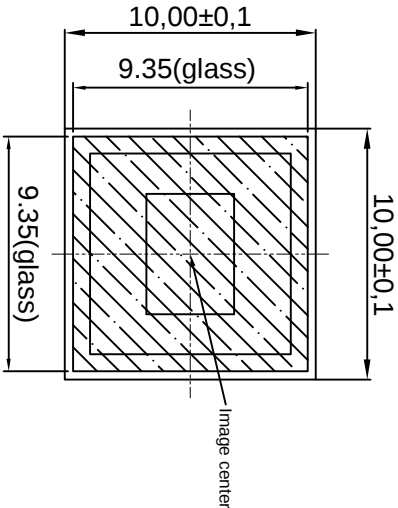


MT9D111,M1-2010 CLCC44 Pin definition


For the latest data sheet, please visit www.sunnywale.com Wechat:9308762



TOP VIEW

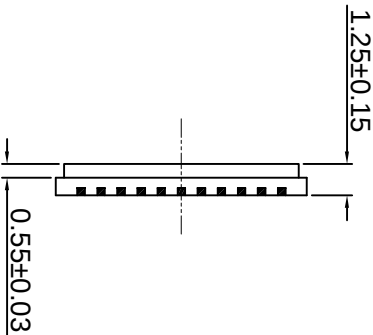

SIDE VIEW

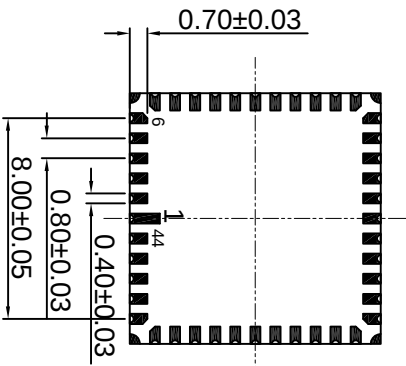


BOTTOM VIEW

PIN NO	NAME	PIN NO	NAME
1	NC	23	VDD
2	NC	24	DGND
3	NC	25	D0
4	NC	26	D1
5	VAAP1X	27	D2
6	AGND	28	D3
7	VDD	29	VDD
8	DGND	30	DGND
9	PCLK	31	D7
10	SDA	32	D6
11	SCL	33	D5
12	SADDR	34	D4
13	STANDBY	35	NC
14	RESET	36	NC
15	AIN	37	NC
16	NC	38	NC
17	NC	39	NC
18	VDDPLL	40	FLASH
19	MCLK	41	NC
20	NC	42	RSVD(DGND)
21	HSYNC	43	VDDGP101
22	VSYNC	44	NC

NO	ITEM	Q'TY	DESCRIPTION
1	PCB	1	
2	Glass	1	
3	Sensor	1	MISOC2010

DWG NO:

SHEET	1OF1	REV	1.0
SCALE	3:1	UNIT	MM



Note: the package deficiency a strobe.

Note:# Image direction register use default settings.

Output format: YUV output

advert:
basic tolerance: ±0.15mm
label have "*"is emphasis dimension

Customer Approval

Check	Approval

NO	Description of revision	Revised	Date	Customer Tel:86-755-83045321			
1				DRAWER		DATE	
2				CHECK		DATE	
3				APPR		DATE	
4							